AIR QUALITY, ENERGY, AND GREENHOUSE GAS EMISSIONS IMPACT ANALYSIS

TENTATIVE TRACT MAP No. 38237 DISCOVERY RESIDENTIAL PROJECT

CITY OF MORENO VALLEY

Lead Agency:

City of Moreno Valley 14177 Frederick Street Moreno Valley, CA 92552

Prepared by:

Vista Environmental

1021 Didrickson Way Laguna Beach, CA 92651 949 510 5355 Greg Tonkovich, AICP

Project No. 21132

October 27, 2021

TABLE OF CONTENTS

1.0	Introduction	1
	1.1 Purpose of Analysis and Study Objectives	1
	1.2 Site Locations and Study Area	
	1.3 Proposed Project Description	1
	1.4 Executive Summary	2
	1.5 Project Design Features Incorporated into the Proposed Project	
	1.6 Mitigation Measures for the Proposed Project	3
2.0	Air Pollutants	6
	2.1 Criteria Pollutants and Ozone Precursors	6
	2.2 Other Pollutants of Concern	8
3.0	Greenhouse Gases	10
	3.1 Greenhouse Gases	
	3.2 Global Warming Potential	
	3.3 Greenhouse Gas Emissions Inventory	13
4.0	Air Quality Management	14
	4.1 Federal – United States Environmental Protection Agency	14
	4.2 State – California Air Resources Board	
	4.3 Regional – Southern California	
	4.4 Local – City of Moreno Valley	21
5.0	Energy Conservation Management	22
	5.1 State	22
	5.2 Local – City of Moreno Valley	24
6.0	Global Climate Change Management	26
	6.1 International	
	6.2 Federal – United States Environmental Protection Agency	
	6.3 State	
	6.4 Regional – Southern California	
	6.5 Local – City of Moreno Valley	33
7.0	Atmospheric Setting	34
	7.1 South Coast Air Basin	
	7.2 Local Climate	
	7.3 Monitored Local Air Quality	
	7.4 Toxic Air Contaminant Levels in the Air Basin	3/
8.0	Modeling Parameters and Assumptions	38
	8.1 CalEEMod Model Input Parameters	38
	8.2 Energy Use Calculations	42

TABLE OF CONTENTS CONTINUED

9.0	Thresholds of Significance		
	9.1 Regional Air Quality	46	
	9.2 Local Air Quality		
	9.3 Toxic Air Contaminants	47	
	9.4 Odor Impacts	47	
	9.5 Energy Conservation		
	9.6 Greenhouse Gas Emissions		
10.0	Impact Analysis		
	10.1 CEQA Thresholds of Significance	50	
	10.2 Air Quality Compliance		
	10.3 Cumulative Net Increase in Non-Attainment Pollution		
	10.4 Sensitive Receptors		
	10.5 Odor Emissions	60	
	10.6 Energy Consumption	61	
	10.7 Energy Plan Consistency		
	10.8 Generation of Greenhouse Gas Emissions		
	10.9 Greenhouse Gas Plan Consistency	67	
11.0	References	70	

APPENDICES

Appendix A – CalEEMod Model Daily Printouts

Appendix B – EMFAC2017 Model Printouts

Appendix C – CalEEMod Model Annual Printouts

LIST OF FIGURES

. 4
. 5
12
14
15
35
36
38
43
44
46
47
53
54
55
58
66
67
68

ACRONYMS AND ABBREVIATIONS

AB Assembly Bill

AQMP Air Quality Management Plan

BACT Best Available Control Technology

BSFC Brake Specific Fuel Consumption

CAAQS California Ambient Air Quality Standards

CalEEMod California Emissions Estimator Model

CalEPA California Environmental Protection Agency

CAPCOA California Air Pollution Control Officers Association

CARB California Air Resources Board
CEC California Energy Commission

CEQA California Environmental Quality Act

CFCs chlorofluorocarbons Cf_4 tetrafluoromethane C_2F_6 hexafluoroethane

CH₄ Methane

City City of Moreno Valley

CO Carbon monoxide

CO₂ Carbon dioxide

CO₂e Carbon dioxide equivalent
DPM Diesel particulate matter

EPA Environmental Protection Agency

FTIP Federal Transportation Improvement Program

GHG Greenhouse gas

GWP Global warming potential
HAP Hazardous Air Pollutants

HFCs Hydrofluorocarbons

IPCC International Panel on Climate Change

kWhr kilowatt-hour

LCFS Low Carbon Fuel Standard

LST Localized Significant Thresholds

MATES Multiple Air Toxics Exposure Study

MMTCO₂e Million metric tons of carbon dioxide equivalent

MPO Metropolitan Planning Organization

MWh Megawatt-hour

NAAQS National Ambient Air Quality Standards

NO_x Nitrogen oxides NO₂ Nitrogen dioxide

OPR Office of Planning and Research

Pfc Perfluorocarbons
PM Particle matter

PM10 Particles that are less than 10 micrometers in diameter
PM2.5 Particles that are less than 2.5 micrometers in diameter

PPM Parts per million
PPB Parts per billion
PPT Parts per trillion

RSP Renaissance Specific Plan

RTIP Regional Transportation Improvement Plan

RTP/SCS Regional Transportation Plan/Sustainable Communities Strategy

SB Senate Bill

SCAQMD South Coast Air Quality Management District

SCAG Southern California Association of Governments

SF₆ Sulfur Hexafluoride

SIP State Implementation Plan

SO_x Sulfur oxides

TAC Toxic air contaminants

UNFCCC United Nations' Framework Convention on Climate Change

VOC Volatile organic compounds

1.0 INTRODUCTION

1.1 Purpose of Analysis and Study Objectives

This Air Quality, Energy, and Greenhouse Gas (GHG) Emissions Impact Analysis has been completed to determine the air quality, energy, and GHG emissions impacts associated with the proposed Tentative Tract Map (TTM) No. 38237 Discover Residential project (proposed project). The following is provided in this report:

- A description of the proposed project;
- A description of the atmospheric setting;
- A description of the criteria pollutants and GHGs;
- A description of the air quality regulatory framework;
- A description of the energy conservation regulatory framework;
- A description of the GHG emissions regulatory framework;
- A description of the air quality, energy, and GHG emissions thresholds including the California Environmental Quality Act (CEQA) significance thresholds;
- An analysis of the conformity of the proposed project with the South Coast Air Quality Management District (SCAQMD) Air Quality Management Plan (AQMP);
- An analysis of the short-term construction related and long-term operational air quality, energy, and GHG emissions impacts; and
- An analysis of the conformity of the proposed project with all applicable energy and GHG emissions reduction plans and policies.

1.2 Site Locations and Study Area

The project site is located in the City of Moreno Valley (City), on the northeast corner of the intersection of Oliver Street and Brodiaea Avenue. The 8.8 gross acre project site is currently vacant and is bounded by Discovery Christian Church to the north, single-family homes (currently under construction) to the east, Brodiaea Avenue and rural residential to the south, and Oliver Street and vacant land to the west. The project local study area is shown in Figure 1.

Sensitive Receptors in Project Vicinity

The nearest sensitive receptor to the project site is a church located adjacent to the north side, where the nearest structure is 65 feet north of the project site. There is also a single-family home located as near as 85 feet to the south of the project site. The nearest K-12 school is La Jolla Elementary School, which is located as near as 0.4 mile south of the project site.

1.3 Proposed Project Description

The proposed project would consist of a residential development that would include 67 detached single-family homes with a 0.56-acre open space park along the north side of the project site and two detention basins on the south side of the project site as well as an onsite roadway system. The proposed project

would also include road improvements to the portions of Oliver Street and Brodiaea Avenue that are adjacent to the project site The proposed site plan is shown in Figure 2.

1.4 Executive Summary

Standard Air Quality, Energy, and GHG Regulatory Conditions

The proposed project will be required to comply with the following regulatory conditions from the SCAQMD and State of California (State).

South Coast Air Quality Management District Rules

The following lists the SCAQMD rules that are applicable, but not limited to the proposed project.

- Rule 402 Nuisance Controls the emissions of odors and other air contaminants;
- Rule 403 Fugitive Dust Controls the emissions of fugitive dust;
- Rules 1108 and 1108.1 Cutback and Emulsified Asphalt Controls the VOC content in asphalt;
- Rule 1113 Architectural Coatings Controls the VOC content in paints and solvents; and
- Rule 1143 Paint Thinners Controls the VOC content in paint thinners.

State of California Rules

The following lists the State of California Code of Regulations (CCR) air quality emission rules that are applicable, but not limited to the proposed project.

- CCR Title 13, Article 4.8, Chapter 9, Section 2449 In use Off-Road Diesel Vehicles;
- CCR Title 13, Section 2025 On-Road Diesel Truck Fleets;
- CCR Title 24 Part 6 California Building Energy Standards; and
- CCR Title 24 Part 11 California Green Building Standards.

Summary of Analysis Results

The following is a summary of the proposed project's impacts with regard to the State CEQA Guidelines air quality, energy, and GHG emissions checklist questions.

Conflict with or obstruct implementation of the applicable air quality plan?

Less than significant impact.

Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is non-attainment under an applicable Federal or State ambient air quality standard?

Less than significant impact.

Expose sensitive receptors to substantial pollutant concentrations?

Less than significant impact.

Result in other emissions (such as those leading to odors) adversely affecting a substantial number of people?

Less than significant impact.

Result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation;

Less than significant impact.

Conflict with or obstruct a state or local plan for renewable energy;

Less than significant impact.

Generate GHG emissions, either directly or indirectly, that may have a significant impact on the environment?

Less than significant impact.

Conflict with any applicable plan, policy or regulation of an agency adopted for the purpose of reducing the emissions of GHGs?

Less than significant impact.

1.5 Project Design Features Incorporated into the Proposed Project

This analysis was based on implementation of the following project design features that the project applicant has committed to implementing.

Project Design Feature 1:

The project applicant shall prepare a trip reduction program that will include preparing a packet that details nearby bus stops and bus routes, bike routes, and walkways, which shall be provided to everyone that purchases a home in this development.

Project Design Feature 2:


The project applicant shall install interior real-time energy smart meters into the proposed homes that are in line with Moreno Valley Utilities efforts.

Project Design Feature 3:

Prior to start of construction activities for the proposed project, the project applicant shall install clear signage on the project site that reminds construction workers to limit idling. The project applicant shall also encourage construction workers to use alternative powered vehicles and equipment.

1.6 Mitigation Measures for the Proposed Project

This analysis found that implementation of the State and SCAQMD air quality, energy, and GHG emissions reductions regulations as well as the Project Design Features shown above in Section 1.5 were adequate to limit criteria pollutants, toxic air contaminants, odors, energy, and GHG emissions from the proposed project to less than significant levels. No mitigation measures are required for the proposed project with respect to air quality, energy, and GHG emissions.

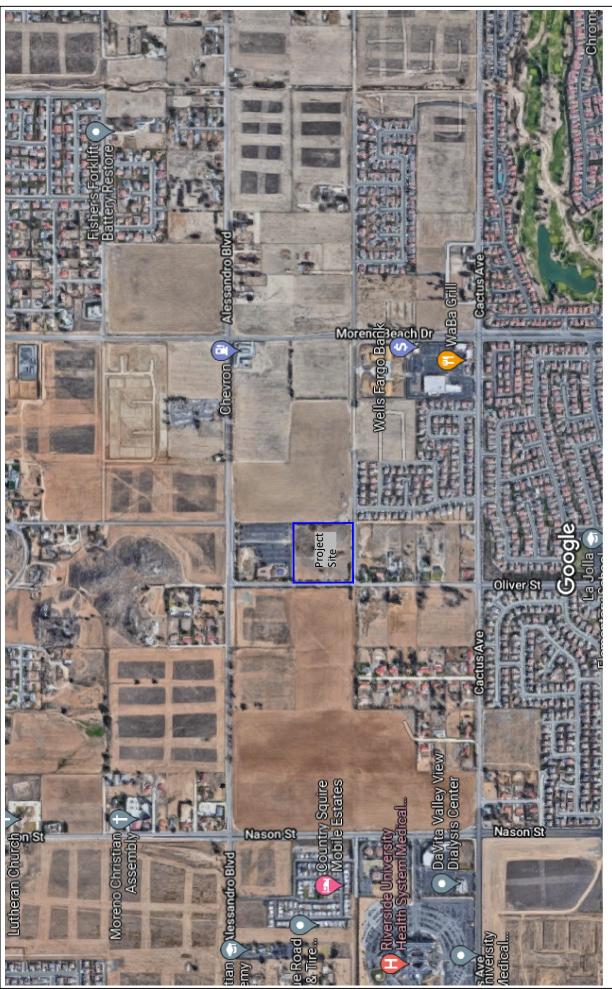

1000 ft Imagery ©2021 County of San Bernardino, Landsat / Copernicus, Maxar Technologies, U.S. Geological Survey, USDA Farm Service Agency, Map data ©2021

VISTA



2.0 AIR POLLUTANTS

Air pollutants are generally classified as either criteria pollutants or non-criteria pollutants. Federal ambient air quality standards have been established for criteria pollutants, whereas no ambient standards have been established for non-criteria pollutants. For some criteria pollutants, separate standards have been set for different periods. Most standards have been set to protect public health. For some pollutants, standards have been based on other values (such as protection of crops, protection of materials, or avoidance of nuisance conditions). A summary of federal and state ambient air quality standards is provided in the Regulatory Framework section.

2.1 Criteria Pollutants and Ozone Precursors

The criteria pollutants consist of: ozone, nitrogen oxides (NOx), CO, sulfur oxides (SOx), lead, and particulate matter (PM). The ozone precursors consist of NO_x and VOC. These pollutants can harm your health and the environment, and cause property damage. The Environmental Protection Agency (EPA) calls these pollutants "criteria" air pollutants because it regulates them by developing human health-based and/or environmentally-based criteria for setting permissible levels. The following provides descriptions of each of the criteria pollutants and ozone precursors.

Nitrogen Oxides

NOx is the generic term for a group of highly reactive gases which contain nitrogen and oxygen. While most NOx are colorless and odorless, concentrations of nitrogen dioxide (NO_2) can often be seen as a reddish-brown layer over many urban areas. NOx form when fuel is burned at high temperatures, as in a combustion process. The primary manmade sources of NO_x are motor vehicles, electric utilities, and other industrial, commercial, and residential sources that burn fuel. NOx reacts with other pollutants to form, ground-level ozone, nitrate particles, acid aerosols, as well as NO_2 , which cause respiratory problems. NO_x and the pollutants formed from NO_x can be transported over long distances, following the patterns of prevailing winds. Therefore, controlling NOx is often most effective if done from a regional perspective, rather than focusing on the nearest sources.

Ozone

Ozone is not usually emitted directly into the air, instead it is created by a chemical reaction between NOx and VOC in the presence of sunlight. Motor vehicle exhaust, industrial emissions, gasoline vapors, chemical solvents as well as natural sources emit NOx and VOC that help form ozone. Ground-level ozone is the primary constituent of smog. Sunlight and hot weather cause ground-level ozone to form with the greatest concentrations usually occurring downwind from urban areas. Ozone is subsequently considered a regional pollutant. Ground-level ozone is a respiratory irritant and an oxidant that increases susceptibility to respiratory infections and can cause substantial damage to vegetation and other materials. Because NOx and VOC are ozone precursors, the health effects associated with ozone are also indirect health effects associated with significant levels of NOx and VOC emissions.

Carbon Monoxide

Carbon monoxide (CO) is a colorless, odorless gas that is formed when carbon in fuel is not burned completely. It is a component of motor vehicle exhaust, which contributes approximately 56 percent of all CO emissions nationwide. In cities, 85 to 95 percent of all CO emissions may come from motor vehicle exhaust. Other sources of CO emissions include industrial processes (such as metals processing and chemical manufacturing), residential wood burning, and natural sources such as forest fires. Woodstoves,

gas stoves, cigarette smoke, and unvented gas and kerosene space heaters are indoor sources of CO. The highest levels of CO in the outside air typically occur during the colder months of the year when inversion conditions are more frequent. The air pollution becomes trapped near the ground beneath a layer of warm air. CO is described as having only a local influence because it dissipates quickly. Since CO concentrations are strongly associated with motor vehicle emissions, high CO concentrations generally occur in the immediate vicinity of roadways with high traffic volumes and traffic congestion, active parking lots, and in automobile tunnels. Areas adjacent to heavily traveled and congested intersections are particularly susceptible to high CO concentrations.

CO is a public health concern because it combines readily with hemoglobin and thus reduces the amount of oxygen transported in the bloodstream. The health threat from lower levels of CO is most serious for those who suffer from heart disease such as angina, clogged arteries, or congestive heart failure. For a person with heart disease, a single exposure to CO at low levels may cause chest pain and reduce that person's ability to exercise; repeated exposures may contribute to other cardiovascular effects. High levels of CO can affect even healthy people. People who breathe high levels of CO can develop vision problems, reduced ability to work or learn, reduced manual dexterity, and difficulty performing complex tasks. At extremely high levels, CO is poisonous and can cause death.

Sulfur Oxides

SOx gases are formed when fuel containing sulfur, such as coal and oil is burned, as well as from the refining of gasoline. SOx dissolves easily in water vapor to form acid and interacts with other gases and particles in the air to form sulfates and other products that can be harmful to people and the environment.

Lead

Lead is a metal found naturally in the environment as well as manufactured products. The major sources of lead emissions have historically been motor vehicles and industrial sources. Due to the phase out of leaded gasoline, metal processing is now the primary source of lead emissions to the air. High levels of lead in the air are typically only found near lead smelters, waste incinerators, utilities, and lead-acid battery manufacturers. Exposure of fetuses, infants and children to low levels of lead can adversely affect the development and function of the central nervous system, leading to learning disorders, distractibility, inability to follow simple commands, and lower intelligence quotient. In adults, increased lead levels are associated with increased blood pressure.

Particulate Matter

PM is the term for a mixture of solid particles and liquid droplets found in the air. PM is made up of a number of components including acids (such as nitrates and sulfates), organic chemicals, metals, and soil or dust particles. The size of particles is directly linked to their potential for causing health problems. Particles that are less than 10 micrometers in diameter (PM10) that are also known as *Respirable Particulate Matter* are the particles that generally pass through the throat and nose and enter the lungs. Once inhaled, these particles can affect the heart and lungs and cause serious health effects. Particles that are less than 2.5 micrometers in diameter (PM2.5) that are also known as *Fine Particulate Matter* have been designated as a subset of PM10 due to their increased negative health impacts and its ability to remain suspended in the air longer and travel further.

Volatile Organic Compounds

Hydrocarbons are organic gases that are formed from hydrogen and carbon and sometimes other elements. Hydrocarbons that contribute to formation of ozone are referred to and regulated as VOCs (also

referred to as reactive organic gases). Combustion engine exhaust, oil refineries, and fossil-fueled power plants are the sources of hydrocarbons. Other sources of hydrocarbons include evaporation from petroleum fuels, solvents, dry cleaning solutions, and paint.

VOC is not classified as a criteria pollutant, since VOCs by themselves are not a known source of adverse health effects. The primary health effects of VOCs result from the formation of ozone and its related health effects. High levels of VOCs in the atmosphere can interfere with oxygen intake by reducing the amount of available oxygen through displacement. Carcinogenic forms of hydrocarbons, such as benzene, are considered TACs. There are no separate health standards for VOCs as a group.

2.2 Other Pollutants of Concern

Toxic Air Contaminants

In addition to the above-listed criteria pollutants, TACs are another group of pollutants of concern. TACs is a term that is defined under the California Clean Air Act and consists of the same substances that are defined as Hazardous Air Pollutants (HAPs) in the Federal Clean Air Act. There are over 700 hundred different types of TACs with varying degrees of toxicity. Sources of TACs include industrial processes such as petroleum refining and chrome plating operations, commercial operations such as gasoline stations and dry cleaners, and motor vehicle exhaust. Cars and trucks release at least 40 different toxic air contaminants. The most important of these TACs, in terms of health risk, are diesel particulates, benzene, formaldehyde, 1,3-butadiene, and acetaldehyde. Public exposure to TACs can result from emissions from normal operations as well as from accidental releases. Health effects of TACs include cancer, birth defects, neurological damage, and death.

TACs are less pervasive in the urban atmosphere than criteria air pollutants, however they are linked to short-term (acute) or long-term (chronic or carcinogenic) adverse human health effects. There are hundreds of different types of TACs with varying degrees of toxicity. Sources of TACs include industrial processes, commercial operations (e.g., gasoline stations and dry cleaners), and motor vehicle exhaust.

According to *The California Almanac of Emissions and Air Quality 2013 Edition*, the majority of the estimated health risk from TACs can be attributed to relatively few compounds, the most important of which is diesel particulate matter (DPM). DPM is a subset of PM2.5 because the size of diesel particles are typically 2.5 microns and smaller. The identification of DPM as a TAC in 1998 led the California Air Resources Board (CARB) to adopt the Risk Reduction Plan to Reduce Particulate Matter Emissions from Diesel-fueled Engines and Vehicles in September 2000. The plan's goals are a 75-percent reduction in DPM by 2010 and an 85-percent reduction by 2020 from the 2000 baseline. Diesel engines emit a complex mixture of air pollutants, composed of gaseous and solid material. The visible emissions in diesel exhaust are known as particulate matter or PM, which includes carbon particles or "soot." Diesel exhaust also contains a variety of harmful gases and over 40 other cancer-causing substances. California's identification of DPM as a toxic air contaminant was based on its potential to cause cancer, premature deaths, and other health problems. Exposure to DPM is a health hazard, particularly to children whose lungs are still developing and the elderly who may have other serious health problems. Overall, diesel engine emissions are responsible for the majority of California's potential airborne cancer risk from combustion sources.

Asbestos

Asbestos is listed as a TAC by CARB and as a HAP by the EPA. Asbestos occurs naturally in mineral formations and crushing or breaking these rocks, through construction or other means, can release asbestiform fibers into the air. Asbestos emissions can result from the sale or use of asbestos-containing materials, road surfacing with such materials, grading activities, and surface mining. The risk of disease is dependent upon the intensity and duration of exposure. When inhaled, asbestos fibers may remain in the lungs and with time may be linked to such diseases as asbestosis, lung cancer, and mesothelioma. The nearest likely locations of naturally occurring asbestos, as identified in the *General Location Guide for Ultramafic Rocks in California*, prepared by the California Division of Mines and Geology, is located in Santa Barbara County. The nearest historic asbestos mine to the project site, as identified in the *Reported Historic Asbestos Mines, Historic Asbestos Prospects, and Other Natural Occurrences of Asbestos in California*, prepared by U.S. Geological Survey, is located at Asbestos Mountain, which is approximately 40 miles southeast of the project site in the San Jacinto Mountains. Due to the distance to the nearest natural occurrences of asbestos, the project site is not likely to contain asbestos.

3.0 GREENHOUSE GASES

3.1 Greenhouse Gases

Constituent gases of the Earth's atmosphere, called atmospheric GHGs, play a critical role in the Earth's radiation amount by trapping infrared radiation from the Earth's surface, which otherwise would have escaped to space. Prominent greenhouse gases contributing to this process include carbon dioxide (CO_2), methane (CH_4), ozone, water vapor, nitrous oxide (N_2O), and chlorofluorocarbons (CFC_3). This phenomenon, known as the Greenhouse Effect, is responsible for maintaining a habitable climate. Anthropogenic (caused or produced by humans) emissions of these greenhouse gases in excess of natural ambient concentrations are responsible for the enhancement of the Greenhouse Effect and have led to a trend of unnatural warming of the Earth's natural climate, known as global warming or climate change. Emissions of gases that induce global warming are attributable to human activities associated with industrial/manufacturing, agriculture, utilities, transportation, and residential land uses. Emissions of CO_2 and N_2O are byproducts of fossil fuel combustion. Methane, a potent greenhouse gas, results from offgassing associated with agricultural practices and landfills. Sinks of CO_2 , where CO_2 is stored outside of the atmosphere, include uptake by vegetation and dissolution into the ocean. The following provides a description of each of the greenhouse gases and their global warming potential.

Water Vapor

Water vapor is the most abundant, important, and variable GHG in the atmosphere. Water vapor is not considered a pollutant; in the atmosphere it maintains a climate necessary for life. Changes in its concentration are primarily considered a result of climate feedbacks related to the warming of the atmosphere rather than a direct result of industrialization. The feedback loop in which water is involved is critically important to projecting future climate change. As the temperature of the atmosphere rises, more water is evaporated from ground storage (rivers, oceans, reservoirs, soil). Because the air is warmer, the relative humidity can be higher (in essence, the air is able to "hold" more water when it is warmer), leading to more water vapor in the atmosphere. As a GHG, the higher concentration of water vapor is then able to absorb more thermal indirect energy radiated from the Earth, thus further warming the atmosphere. The warmer atmosphere can then hold more water vapor and so on and so on. This is referred to as a "positive feedback loop." The extent to which this positive feedback loop will continue is unknown as there is also dynamics that put the positive feedback loop in check. As an example, when water vapor increases in the atmosphere, more of it will eventually also condense into clouds, which are more able to reflect incoming solar radiation (thus allowing less energy to reach the Earth's surface and heat it up).

Carbon Dioxide

The natural production and absorption of CO_2 is achieved through the terrestrial biosphere and the ocean. However, humankind has altered the natural carbon cycle by burning coal, oil, natural gas, and wood. Since the industrial revolution began in the mid-1700s, each of these activities has increased in scale and distribution. CO_2 was the first GHG demonstrated to be increasing in atmospheric concentration with the first conclusive measurements being made in the last half of the 20^{th} century. Prior to the industrial revolution, concentrations were fairly stable at 280 parts per million (ppm). The International Panel on Climate Change (IPCC) indicates that concentrations were 379 ppm in 2005, an increase of more than 30 percent. Left unchecked, the IPCC projects that concentration of carbon dioxide in the atmosphere is projected to increase to a minimum of 540 ppm by 2100 as a direct result of anthropogenic sources. This

could result in an average global temperature rise of at least two degrees Celsius or 3.6 degrees Fahrenheit.

Methane

 CH_4 is an extremely effective absorber of radiation, although its atmospheric concentration is less than that of CO_2 . Its lifetime in the atmosphere is brief (10 to 12 years), compared to some other GHGs (such as CO_2 , N_2O , and CFCs). CH_4 has both natural and anthropogenic sources. It is released as part of the biological processes in low oxygen environments, such as in swamplands or in rice production (at the roots of the plants). Over the last 50 years, human activities such as growing rice, raising cattle, using natural gas, and mining coal have added to the atmospheric concentration of methane. Other anthropocentric sources include fossil-fuel combustion and biomass burning.

Nitrous Oxide

Concentrations of N_2O also began to rise at the beginning of the industrial revolution. In 1998, the global concentration of this GHG was documented at 314 parts per billion (ppb). N_2O is produced by microbial processes in soil and water, including those reactions which occur in fertilizer containing nitrogen. In addition to agricultural sources, some industrial processes (fossil fuel-fired power plants, nylon production, nitric acid production, and vehicle emissions) also contribute to its atmospheric load. N_2O is also commonly used as an aerosol spray propellant (i.e., in whipped cream bottles, in potato chip bags to keep chips fresh, and in rocket engines and race cars).

Chlorofluorocarbons

CFCs are gases formed synthetically by replacing all hydrogen atoms in methane or ethane with chlorine and/or fluorine atoms. CFCs are nontoxic, nonflammable, insoluble, and chemically unreactive in the troposphere (the level of air at the Earth's surface). CFCs have no natural source, but were first synthesized in 1928. They were used for refrigerants, aerosol propellants, and cleaning solvents. Due to the discovery that they are able to destroy stratospheric ozone, a global effort to halt their production was undertaken and in 1989 the European Community agreed to ban CFCs by 2000 and subsequent treaties banned CFCs worldwide by 2010. This effort was extremely successful, and the levels of the major CFCs are now remaining level or declining. However, their long atmospheric lifetimes mean that some of the CFCs will remain in the atmosphere for over 100 years.

Hydrofluorocarbons

Hydrofluorocarbons (HFCs) are synthetic man-made chemicals that are used as a substitute for CFCs. Out of all the GHGs, they are one of three groups with the highest global warming potential. The HFCs with the largest measured atmospheric abundances are (in order), HFC-23 (CHF $_3$), HFC-134a (CF $_3$ CH $_2$ F), and HFC-152a (CH $_3$ CHF $_2$). Prior to 1990, the only significant emissions were HFC-23. HFC-134a use is increasing due to its use as a refrigerant. Concentrations of HFC-23 and HFC-134a in the atmosphere are now about 10 parts per trillion (ppt) each. Concentrations of HFC-152a are about 1 ppt. HFCs are manmade for applications such as automobile air conditioners and refrigerants.

Perfluorocarbons

Perfluorocarbons (PFCs) have stable molecular structures and do not break down through the chemical processes in the lower atmosphere. High-energy ultraviolet rays about 60 kilometers above Earth's surface are able to destroy the compounds. Because of this, PFCs have very long lifetimes, between 10,000 and 50,000 years. Two common PFCs are tetrafluoromethane (CF_4) and hexafluoroethane (C_2F_6).

Concentrations of CF₄ in the atmosphere are over 70 ppt. The two main sources of PFCs are primary aluminum production and semiconductor manufacturing.

Sulfur Hexafluoride

Sulfur Hexafluoride (SF_6) is an inorganic, odorless, colorless, nontoxic, nonflammable gas. SF_6 has the highest global warming potential of any gas evaluated; 23,900 times that of CO_2 . Concentrations in the 1990s were about 4 ppt. Sulfur hexafluoride is used for insulation in electric power transmission and distribution equipment, in the magnesium industry, in semiconductor manufacturing, and as a tracer gas for leak detection.

Aerosols

Aerosols are particles emitted into the air through burning biomass (plant material) and fossil fuels. Aerosols can warm the atmosphere by absorbing and emitting heat and can cool the atmosphere by reflecting light. Cloud formation can also be affected by aerosols. Sulfate aerosols are emitted when fuel containing sulfur is burned. Black carbon (or soot) is emitted during biomass burning due to the incomplete combustion of fossil fuels. Particulate matter regulation has been lowering aerosol concentrations in the United States; however, global concentrations are likely increasing.

3.2 Global Warming Potential

GHGs have varying global warming potential (GWP). The GWP is the potential of a gas or aerosol to trap heat in the atmosphere; it is the cumulative radiative forcing effects of a gas over a specified time horizon resulting from the emission of a unit mass of gas relative to the reference gas, CO₂. The GHGs listed by the IPCC and the CEQA Guidelines are discussed in this section in order of abundance in the atmosphere. Water vapor, the most abundant GHG, is not included in this list because its natural concentrations and fluctuations far outweigh its anthropogenic (human-made) sources. To simplify reporting and analysis, GHGs are commonly defined in terms of their GWP. The IPCC defines the GWP of various GHG emissions on a normalized scale that recasts all GHG emissions in terms of CO₂ equivalent (CO₂e). As such, the GWP of CO₂ is equal to 1. The GWP values used in this analysis are based on the 2007 IPCC Fourth Assessment Report, which are used in CARB's 2014 Scoping Plan Update and the CalEEMod Model Version 2020.4.0 and are detailed in Table A. The IPCC has updated the Global Warming Potentials of some gases in their Fifth Assessment Report, however the new values have not yet been incorporated into the CalEEMod model that has been utilized in this analysis.

Table A - Global Warming Potentials, Atmospheric Lifetimes and Abundances of GHGs

Gas	Atmospheric Lifetime (years) ¹	Global Warming Potential (100 Year Horizon) ²	Atmospheric Abundance
Carbon Dioxide (CO ₂)	50-200	1	379 ppm
Methane (CH ₄)	9-15	25	1,774 ppb
Nitrous Oxide (N ₂ O)	114	298	319 ppb
HFC-23	270	14,800	18 ppt
HFC-134a	14	1,430	35 ppt
HFC-152a	1.4	124	3.9 ppt
PFC: Tetrafluoromethane (CF ₄)	50,000	7,390	74 ppt
PFC: Hexafluoroethane (C₂F ₆)	10,000	12,200	2.9 ppt
Sulfur Hexafluoride (SF ₆)	3,200	22,800	5.6 ppt

Notes:

Definitions: ppm = parts per million; ppb = parts per billion; ppt = parts per trillion

Source: IPCC 2007, EPA 2015

3.3 Greenhouse Gas Emissions Inventory

According to the Carbon Dioxide Information Analysis Center 1 , 9,855 million metric tons (MMT) of CO_2e emissions were created globally in the year 2014. According to the Environmental Protection Agency (EPA), the breakdown of global GHG emissions by sector consists of: 25 percent from electricity and heat production; 21 percent from industry; 24 percent from agriculture, forestry and other land use activities; 14 percent from transportation; 6 percent from building energy use; and 10 percent from all other sources of energy use².

According to *Inventory of U.S. Greenhouse Gas Emissions and Sinks 1990-2019*, prepared by EPA, in 2019 total U.S. GHG emissions were 6,558 million metric tons (MMT) of CO₂e emissions. Total U.S. emissions have increased by 4 percent between 1990 and 2016 and GHG emissions decreased by 13 percent between 2005 and 2019. The recent decrease in GHG emissions was a result of multiple factors, including population, economic growth, energy markets, and technological changes the include energy efficiency and energy fuel choices. Between 2018 and 2019, GHG emissions decreased by almost 2 percent due to multiple factors, including a one percent decrease in total energy use.

According to CARB, the State of California created 425 million metric tons of carbon dioxide equivalent (MMTCO $_2$ e) in 2018. The breakdown of California GHG emissions by sector consists of: 39.9 percent from transportation; 21.0 percent from industrial; 14.8 percent from electricity generation; 7.7 percent from agriculture; 9.7 percent from residential and commercial buildings; 4.8 percent from high global warming potential sources, and 2.1 percent from waste. In 2018, GHG emissions were 0.8 MMTCO $_2$ e higher than 2017 levels and 6 MMTCO $_2$ e below the 2020 GHG limit of 431 MMTCO $_2$ e.

¹ Defined as the half-life of the gas.

 $^{^2}$ Compared to the same quantity of CO $_2$ emissions and is based on the Intergovernmental Panel On Climate Change (IPCC) 2007 standard, which is utilized in CalEEMod (Version 2020.4.0), that is used in this report (CalEEMod User Guide, May 2021).

¹ Obtained from: https://cdiac.ess-dive.lbl.gov/trends/emis/tre glob 2014.html

² Obtained from: https://www.epa.gov/ghgemissions/global-greenhouse-gas-emissions-data

³ Obtained from: https://www.arb.ca.gov/cc/inventory/data/data.htm

4.0 AIR QUALITY MANAGEMENT

The project site is located within the South Coast Air Basin (Air Basin). The air quality at the project site is addressed through the efforts of various international, federal, state, regional, and local government agencies. These agencies work jointly, as well as individually, to improve air quality through legislation, regulations, planning, policy-making, education, and a variety of programs. The agencies responsible for improving the air quality are discussed below.

4.1 Federal – United States Environmental Protection Agency

The Clean Air Act, first passed in 1963 with major amendments in 1970, 1977 and 1990, is the overarching legislation covering regulation of air pollution in the United States. The Clean Air Act has established the mandate for requiring regulation of both mobile and stationary sources of air pollution at the state and federal level. The EPA was created in 1970 in order to consolidate research, monitoring, standard-setting and enforcement authority into a single agency.

The EPA is responsible for setting and enforcing the National Ambient Air Quality Standards (NAAQS) for atmospheric pollutants. It regulates emission sources that are under the exclusive authority of the federal government, such as aircraft, ships, and certain locomotives. NAAQS pollutants were identified using medical evidence and are shown below in Table B.

Table B – State and Federal Criteria Pollutant Standards

Air	Concentration / Averaging Time		
Pollutant	California	Federal Primary	
Tollatant	Standards	Standards	Most Relevant Effects
Ozone	0.09 ppm / 1-hour 0.07 ppm / 8-hour	0.070 ppm, / 8-hour	(a) Pulmonary function decrements and localized lung edema in humans and animals; (b) Risk to public health implied by alterations in pulmonary morphology and host defense in animals; (c) Increased mortality risk; (d) Risk to public health implied by altered connective tissue metabolism and altered pulmonary morphology in animals after long-term exposures and pulmonary function decrements in chronically exposed humans; (e) Vegetation damage; and (f) Property damage.
Carbon Monoxide (CO)	20.0 ppm / 1-hour 9.0 ppm / 8-hour	35.0 ppm / 1-hour 9.0 ppm / 8-hour	(a) Aggravation of angina pectoris and other aspects of coronary heart disease; (b) Decreased exercise tolerance in persons with peripheral vascular disease and lung disease; (c) Impairment of central nervous system functions; and (d) Possible increased risk to fetuses.
Nitrogen Dioxide (NO ₂)	0.18 ppm / 1-hour 0.030 ppm / annual	100 ppb / 1-hour 0.053 ppm / annual	(a) Potential to aggravate chronic respiratory disease and respiratory symptoms in sensitive groups; (b) Risk to public health implied by pulmonary and extra-pulmonary biochemical and cellular changes and pulmonary structural changes; and (c) Contribution to atmospheric discoloration.
Sulfur Dioxide (SO ₂)	0.25 ppm / 1-hour 0.04 ppm / 24-hour	75 ppb / 1-hour 0.14 ppm/annual	(a) Bronchoconstriction accompanied by symptoms which may include wheezing, shortness of breath and chest tightness, during exercise or physical activity in persons with asthma.
Suspended Particulate	50 μg/m³ / 24-hour 20 μg/m³ / annual	150 μg/m³ / 24- hour	(a) Exacerbation of symptoms in sensitive patients with respiratory or cardiovascular disease; (b) Declines in

Air	Concentration / Averaging Time		
Pollutant	California Standards	Federal Primary Standards	Most Relevant Effects
Matter (PM ₁₀)			pulmonary function growth in children; and (c) Increased risk of premature death from heart or lung diseases in elderly.
Suspended Particulate Matter (PM _{2.5})	12 μg/m³ / annual	35 μg/m³ / 24-hour 12 μg/m³ / annual	
Sulfates	25 μg/m³ / 24-hour	No Federal Standards	(a) Decrease in ventilatory function; (b) Aggravation of asthmatic symptoms; (c) Aggravation of cardio-pulmonary disease; (d) Vegetation damage; (e) Degradation of visibility; and (f) Property damage.
Lead	1.5 μg/m³ / 30-day	0.15 μg/m³ /3- month rolling	(a) Learning disabilities; and (b) Impairment of blood formation and nerve conduction.
Visibility Reducing Particles	Extinction coefficient of 0.23 per kilometer - visibility of ten miles or more due to particles when relative humidity is less than 70 percent.	No Federal Standards	Visibility impairment on days when relative humidity is less than 70 percent.

 $Source: \underline{http://www.arb.ca.gov/research/aaqs/aaqs2.pdf} \ .$

As part of its enforcement responsibilities, the EPA requires each state with federal nonattainment areas to prepare and submit a State Implementation Plan (SIP) that demonstrates the means to attain the national standards. The SIP must integrate federal, state, and local components and regulations to identify specific measures to reduce pollution, using a combination of performance standards and market-based programs within the timeframe identified in the SIP. The CARB defines attainment as the category given to an area with no violations in the past three years. As indicated below in Table C, the Air Basin has been designated by EPA for the national standards as a non-attainment area for ozone and PM2.5 and partial non-attainment for lead. Currently, the Air Basin is in attainment with the national ambient air quality standards for CO, PM10, SO₂, and NO₂.

Table C – South Coast Air Basin Attainment Status

Criteria Pollutant	Standard	Averaging Time	Designation ^{a)}	Attainment Date ^{b)}
1-Hour Ozone ^{c)}	NAAQS	1979 1-Hour (0.12 ppm)	Nonattainment (Extreme)	2/6/2023 (revised deadline)
	CAAQS	1-Hour (0.09 ppm)	Nonattainment	N/A
O. I. O. di	NAAQS	1997 8-Hour (0.08 ppm)	Nonattainment (Extreme)	6/15/2024
8-Hour Ozone ^{d)}	NAAQS	2008 8-Hour (0.075 ppm)	Nonattainment (Extreme)	8/3/2038
	NAAQS	2015 8-Hour (0.070 ppm)	Pending – Expect Nonattainment (Extreme)	Pending (beyond 2032)
-	CAAQS	8-Hour (0.070 ppm)	Nonattainment	Beyond 2032

Criteria Pollutant	Standard	Averaging Time	Designation ^{a)}	Attainment Dateb)
60	NAAQS	1-Hour (35 ppm) 8-Hour (9 ppm)	Attainment (Maintenance)	6/11/2007 (attained)
CO -	CAAQS	1-Hour (20 ppm) 8-Hour (9 ppm)	Attainment	6/11/2007 (attained)
	NAAQS	2010 1-Hour (0.10 ppm)	Unclassifiable/ Attainment	N/A (attained)
$NO_2^e)$	NAAQS	1971 Annual (0.053 ppm)	Attainment (Maintenance)	9/22/1998 (attained)
	CAAQS	1-Hour (0.18 ppm) Annual (0.030 ppm)	Attainment	
SO ₂ f)	NAAQS	2010 1-Hour (75 ppb)	Designations Pending (expect Unclassifiable/ Attainment)	N/A (attained)
3O ₂ -/	NAAQS	1971 24-Hour (0.14 ppm) 1971 Annual (0.03 ppm)	Unclassifiable/ Attainment	3/19/1979 (attained)
D1440	NAAQS	1987 24-hour (150 μg/m³)	Attainment (Maintenance) ^{g)}	7/26/2013 (attained)
PM10 -	CAAQS	24-hour (50 μ g/m³) Annual (20 μ g/m³)	Nonattainment	N/A
	NAAQS	2006 24-Hour (35 μg/m³)	Nonattainment (Serious)	12/31/2019
PM2.5 ^{h)}	NAAQS	1997 Annual (15.0 μg/m³)	Attainment (final determination pending)	8/24/2016 (attained 2013)
	NAAQS	2012 Annual (12.0 μg/m³)	Nonattainment (Moderate)	12/31/2025
	CAAQS	Annual (12.0 μ g/m ³)	Nonattainment	N/A
Lead ⁱ⁾	NAAQS	2008 3-Months Rolling (0.15 μg/m³)	Nonattainment (Partial) (Attainment determination requested)	12/31/2015

Source: SCAQMD, February 2016

Notes:

- a) U.S. EPA often only declares Nonattainment areas; everywhere else is listed as Unclassifiable/Attainment or Unclassifiable
- b) A design value below the NAAQS for data through the full year or smog season prior to the attainment date is typically required for attainment demonstration
- c) The 1979 1-hour ozone standard (0.12 ppm) was revoked, effective June 15, 2005; however, the Basin has not attained this standard and therefore has some continuing obligations with respect to the revoked standard
- d) The 2008 8-hour ozone NAAQS (0.075 ppm) was revised to 0.070 ppm. Effective 12/28/15 with classifications and implementation goals to be finalized by 10/1/17; the 1997 8-hour ozone NAAQS (0.08 ppm) was revoked in the 2008 ozone implementation rule, effective 4/6/15; there are continuing obligations under the revoked 1997 and revised 2008 ozone until they are attained.
- e) New NO₂ 1-hour standard, effective August 2, 2010; attainment designations January 20, 2012; annual NO₂ standard retained
- f) The 1971 annual and 24-hour SO₂ standards were revoked, effective August 23, 2010; however, these 1971 standards will remain in effect until one year after U.S. EPA promulgates area designations for the 2010 SO₂ 1-hour standard. Area designations are still pending, with Basin expected to be designated Unclassifiable /Attainment.
- g) Annual PM10 standard was revoked, effective December 18, 2006; 24-hour PM10 NAAQS deadline was 12/31/2006; SCAQMD request for attainment redesignation and PM10 maintenance plan was approved by U.S. EPA on June 26, 2013, effective July 26, 2013.
- h) The attainment deadline for the 2006 24-Hour PM2.5 NAAQS was 12/31/15 for the former "moderate" classification; EPA approved reclassification to "serious", effective 2/12/16 with an attainment deadline of 12/31/19; the 2012 (proposal year) annual PM2.5 NAAQS was revised on 1/15/13, effective 3/18/13, from 15 to 12 μ g/m³; new annual designations were final 1/15/15, effective 4/15/15; on July 25, 2016 EPA finalized a determination that the Basin attained the 1997 annual (15.0 μ g/m³) and 24-hour PM2.5 (65 μ g/m³) NAAQS, effective August 24, 2016
- i) Partial Nonattainment designation Los Angeles County portion of Basin only for near-source monitors. Expect to remain in attainment based on current monitoring data; attainment re-designation request pending.

In 2015, one or more stations in the Air Basin exceeded the most current federal standards on a total of 146 days (40 percent of the year), including: 8-hour ozone (113 days over 2015 ozone NAAQS), 24-hour PM2.5 (30 days, including near-road sites; 25 days for ambient sites only), PM10 (2 days), and NO₂ (1 day).

Despite substantial improvement in air quality over the past few decades, some air monitoring stations in the Air Basin still exceed the NAAQS for ozone more frequently than any other area in the United States. Seven of the top 10 stations in the nation most frequently exceeding the 2015 8-hour ozone NAAQS in 2015 were located within the Air Basin, including stations in San Bernardino, Riverside, and Los Angeles Counties (SCAQMD, 2016).

PM2.5 levels in the Air Basin have improved significantly in recent years. By 2013 and again in 2014 and 2015, there were no stations measuring PM2.5 in the Air Basin that violated the former 1997 annual PM2.5 NAAQS (15.0 μ g/m³) for the 3-year design value period. On July 25, 2016 the EPA finalized a determination that the Basin attained the 1997 annual (15.0 μ g/m³) and 24-hour PM2.5 (65 μ g/m³) NAAQS, effective August 24, 2016. Of the 17 federal PM2.5 monitors at ambient stations in the Air Basin for the 2013-2015 period, five stations had design values over the current 2012 annual PM2.5 NAAQS (12.0 μ g/m³), including: Mira Loma (Air Basin maximum at 14.1 μ g/m³), Rubidoux, Fontana, Ontario, Central Los Angeles, and Compton. For the 24-hour PM2.5 NAAQS (35.0 μ g/m³) there were 14 stations in the Air Basin in 2015 that had one or more daily exceedances of the standard, with a combined total of 25 days over that standard in the Air Basin. While it was previously anticipated that the Air Basin's 24-hour PM2.5 NAAQS would be attained by 2015, this did not occur based on the data for 2013 through 2015. The higher number of days exceeding the 24-hour PM2.5 NAAQS over what was expected is largely attributed to the severe drought conditions over this period that allowed for more stagnant conditions in the Air Basin with multi-day buildups of higher PM2.5 concentrations. This was caused by the lack of storm-related dispersion and rain-out of PM and its precursors (SCAQMD, 2016).

The Air Basin is currently in attainment for the federal standards for SO₂, CO, NO₂, and PM10 and the Riverside County portion of the Air Basin is currently in attainment for the federal standards for lead. While the concentration level of the 1-hour NO₂ federal standard (100 ppb) was exceeded in the Air Basin for one day in 2015 (Long Beach- Hudson Station), the NAAQS NO₂ design value has not been exceeded. Therefore, the Air Basin remains in attainment of the NO₂ NAAQS (SCAQMD, 2016).

4.2 State – California Air Resources Board

The CARB, which is a part of the California Environmental Protection Agency, is responsible for the coordination and administration of both federal and state air pollution control programs within California. In this capacity, the CARB conducts research, sets the California Ambient Air Quality Standards (CAAQS), compiles emission inventories, develops suggested control measures, provides oversight of local programs, and prepares the SIP. The CAAQS for criteria pollutants are shown above in Table B. In addition, the CARB establishes emission standards for motor vehicles sold in California, consumer products (e.g. hairspray, aerosol paints, and barbeque lighter fluid), and various types of commercial equipment. It also sets fuel specifications to further reduce vehicular emissions.

The Air Basin has been designated by the CARB as a non-attainment area for ozone, PM10 and PM2.5. Currently, the Air Basin is in attainment with the ambient air quality standards for CO, NO_2 , SO_2 , lead, and sulfates and is unclassified for visibility reducing particles and Hydrogen Sulfide.

The following lists the State of California Code of Regulations (CCR) air quality emission rules that are applicable, but not limited to all residential projects in the State.

Assembly Bill 2588

The Air Toxics "Hot Spots" Information and Assessment Act (Assembly Bill [AB] 2588, 1987, Connelly) was enacted in 1987 as a means to establish a formal air toxics emission inventory risk quantification program. AB 2588, as amended, establishes a process that requires stationary sources to report the type and quantities of certain substances their facilities routinely release in California. The data is ranked by high, intermediate, and low categories, which are determined by: the potency, toxicity, quantity, volume, and proximity of the facility to nearby receptors.

CARB Regulation for In-Use Off-Road Diesel Vehicles

On July 26, 2007, the CARB adopted California Code of Regulations Title 13, Article 4.8, Chapter 9, Section 2449 to reduce DPM and NOx emissions from in-use off-road heavy-duty diesel vehicles in California. Such vehicles are used in construction, mining, and industrial operations. The regulation limits idling to no more than five consecutive minutes, requires reporting and labeling, and requires disclosure of the regulation upon vehicle sale. Performance requirements of the rule are based on a fleet's average NOx emissions, which can be met by replacing older vehicles with newer, cleaner vehicles or by applying exhaust retrofits. The regulation was amended in 2010 to delay the original timeline of the performance requirement making the first compliance deadline January 1, 2014 for large fleets (over 5,000 horsepower), 2017 for medium fleets (2,501-5,000 horsepower), and 2019 for small fleets (2,500 horsepower or less). Currently, no commercial operation in California may add any equipment to their fleet that has a Tier 0 or Tier 1 engine. By January 1, 2018 medium and large fleets will be restricted from adding Tier 2 engines to their fleets and by January 2023, no commercial operation will be allowed to add Tier 2 engines to their fleets. It should be noted that commercial fleets may continue to use their existing Tier 0 and 1 equipment, if they can demonstrate that the average emissions from their entire fleet emissions meet the NOx emissions targets.

CARB Resolution 08-43 for On-Road Diesel Truck Fleets

On December 12, 2008 the CARB adopted Resolution 08-43, which limits NOx, PM10 and PM2.5 emissions from on-road diesel truck fleets that operate in California. On October 12, 2009 Executive Order R-09-010 was adopted that codified Resolution 08-43 into Section 2025, title 13 of the California Code of Regulations. This regulation requires that by the year 2023 all commercial diesel trucks that operate in California shall meet model year 2010 (Tier 4 Final) or latter emission standards. In the interim period, this regulation provides annual interim targets for fleet owners to meet. By January 1, 2014, 50 percent of a truck fleet is required to have installed Best Available Control Technology (BACT) for NOx emissions and 100 percent of a truck fleet installed BACT for PM10 emissions. This regulation also provides a few exemptions including a onetime per year 3-day pass for trucks registered outside of California. All onroad diesel trucks utilized during construction of the proposed project will be required to comply with Resolution 08-43.

4.3 Regional – Southern California

The SCAQMD is the agency principally responsible for comprehensive air pollution control in the South Coast Air Basin. To that end, as a regional agency, the SCAQMD works directly with the Southern California Association of Governments (SCAG), county transportation commissions, and local governments and cooperates actively with all federal and state agencies.

South Coast Air Quality Management District

SCAQMD develops rules and regulations, establishes permitting requirements for stationary sources, inspects emission sources, and enforces such measures through educational programs or fines, when necessary. SCAQMD is directly responsible for reducing emissions from stationary, mobile, and indirect sources. It has responded to this requirement by preparing a sequence of AQMPs. The *Final 2016 Air Quality Management Plan* (2016 AQMP) was adopted by the SCAQMD Board on March 3, 2016 and was adopted by CARB on March 23, 2017 for inclusion into the SIP. The 2016 AQMP was prepared in order to meet the following standards:

- 8-hour Ozone (75 ppb) by 2032
- Annual PM2.5 (12 μg/m3) by 2021-2025
- 8-hour Ozone (80 ppb) by 2024 (updated from the 2007 and 2012 AQMPs)
- 1-hour Ozone (120 ppb) by 2023 (updated from the 2012 AQMP)
- 24-hour PM2.5 (35 μg/m³) by 2019 (updated from the 2012 AQMP)

In addition to meeting the above standards, the 2016 AQMP also includes revisions to the attainment demonstrations for the 1997 8-hour ozone NAAQS and the 1979 1-hour ozone NAAQS. The prior 2012 AQMP was prepared in order to demonstrate attainment with the 24-hour PM2.5 standard by 2014 through adoption of all feasible measures. The prior 2007 AQMP demonstrated attainment with the 1997 8-hour ozone (80 ppb) standard by 2023, through implementation of future improvements in control techniques and technologies. These "black box" emissions reductions represent 65 percent of the remaining NOx emission reductions by 2023 in order to show attainment with the 1997 8-hour ozone NAAQS. Given the magnitude of these needed emissions reductions, additional NOx control measures have been provided in the 2012 AQMP even though the primary purpose was to show compliance with 24-hour PM2.5 emissions standards.

The 2016 AQMP provides a new approach that focuses on available, proven and cost effective alternatives to traditional strategies, while seeking to achieve multiple goals in partnership with other entities to promote reductions in GHG emissions and TAC emissions as well as efficiencies in energy use, transportation, and goods movement. The 2016 AQMP recognizes the critical importance of working with other agencies to develop funding and other incentives that encourage the accelerated transition of vehicles, buildings and industrial facilities to cleaner technologies in a manner that benefits not only air quality, but also local businesses and the regional economy.

Although SCAQMD is responsible for regional air quality planning efforts, it does not have the authority to directly regulate air quality issues associated with plans and new development projects throughout the Air Basin. Instead, this is controlled through local jurisdictions in accordance to CEQA. In order to assist local jurisdictions with air quality compliance issues the CEQA Air Quality Handbook (SCAQMD CEQA Handbook), prepared by SCAQMD, 1993, with the most current updates found at http://www.aqmd.gov/ceqa/hdbk.html, was developed in accordance with the projections and programs detailed in the AQMPs. The purpose of the SCAQMD CEQA Handbook is to assist Lead Agencies, as well as consultants, project proponents, and other interested parties in evaluating a proposed project's potential air quality impacts. Specifically, the SCAQMD CEQA Handbook explains the procedures that SCAQMD recommends be followed for the environmental review process required by CEQA. The SCAQMD CEQA Handbook provides direction on how to evaluate potential air quality impacts, how to determine whether these impacts are significant, and how to mitigate these impacts. The SCAQMD

intends that by providing this guidance, the air quality impacts of plans and development proposals will be analyzed accurately and consistently throughout the Air Basin, and adverse impacts will be minimized.

The following lists the SCAQMD rules that are applicable but not limited to residential development projects in the Air Basin.

Rule 402 - Nuisance

Rule 402 prohibits a person from discharging from any source whatsoever such quantities of air contaminants or other material which causes injury, detriment, nuisance, or annoyance to any considerable number of persons or to the public, or which endanger the comfort, repose, health or safety of any such persons or the public, or which cause, or have a natural tendency to cause, injury or damage to business or property. Compliance with Rule 402 will reduce local air quality and odor impacts to nearby sensitive receptors.

Rule 403- Fugitive Dust

Rule 403 governs emissions of fugitive dust during construction activities and requires that no person shall cause or allow the emissions of fugitive dust such that dust remains visible in the atmosphere beyond the property line or the dust emission exceeds 20 percent opacity, if the dust is from the operation of a motorized vehicle. Compliance with this rule is achieved through application of standard Best Available Control Measures, which include but are not limited to the measures below. Compliance with these rules would reduce local air quality impacts to nearby sensitive receptors.

- Utilize either a pad of washed gravel 50 feet long, 100 feet of paved surface, a wheel shaker, or a
 wheel washing device to remove material from vehicle tires and undercarriages before leaving
 project site.
- Do not allow any track out of material to extend more than 25 feet onto a public roadway and remove all track out at the end of each workday.
- Water all exposed areas on active sites at least three times per day and pre-water all areas prior to clearing and soil moving activities.
- Apply nontoxic chemical stabilizers according to manufacturer specifications to all construction areas that will remain inactive for 10 days or longer.
- Pre-water all material to be exported prior to loading, and either cover all loads or maintain at least 2 feet of freeboard in accordance with the requirements of California Vehicle Code Section 23114.
- Replant all disturbed area as soon as practical.
- Suspend all grading activities when wind speeds (including wind gusts) exceed 25 miles per hour.
- Restrict traffic speeds on all unpaved roads to 15 miles per hour or less.

Rules 1108 and 1108.1 - Cutback and Emulsified Asphalt

Rules 1108 and 1108.1 govern the sale, use, and manufacturing of asphalt and limits the VOC content in asphalt. This rule regulates the VOC contents of asphalt used during construction as well as any on-going maintenance during operations. Therefore, all asphalt used during construction and operation of the proposed project must comply with SCAQMD Rules 1108 and 1108.1.

Rule 1113 - Architectural Coatings

Rule 1113 governs the sale, use, and manufacturing of architectural coatings and limits the VOC content in sealers, coatings, paints and solvents. This rule regulates the VOC contents of paints available during construction. Therefore, all paints and solvents used during construction and operation of the proposed project must comply with SCAQMD Rule 1113.

Rule 1143 - Paint Thinners

Rule 1143 governs the sale, use, and manufacturing of paint thinners and multi-purpose solvents that are used in thinning of coating materials, cleaning of coating application equipment, and other solvent cleaning operations. This rule regulates the VOC content of solvents used during construction. Solvents used during construction and operation of the proposed project must comply with SCAQMD Rule 1143.

Southern California Association of Governments

The SCAG is the regional planning agency for Los Angeles, Orange, Ventura, Riverside, San Bernardino, and Imperial Counties and addresses regional issues relating to transportation, the economy, community development and the environment. SCAG is the federally designated Metropolitan Planning Organization (MPO) for the majority of the southern California region and is the largest MPO in the nation. With respect to air quality planning, SCAG has prepared the 2020-2045 Regional Transportation Plan/Sustainable Communities Strategy (Connect SoCal), adopted September 3, 2020and the 2019 Federal Transportation Improvement Program (2019 FTIP), adopted September 2018, which addresses regional development and growth forecasts. Although the Connect SoCal and 2019 FTIP are primarily planning documents for future transportation projects a key component of these plans are to integrate land use planning with transportation planning that promotes higher density infill development in close proximity to existing transit service. These plans form the basis for the land use and transportation components of the AQMP, which are utilized in the preparation of air quality forecasts and in the consistency analysis included in the AQMP. The Connect SoCal, 2019 FTIP, and AQMP are based on projections originating within the City and County General Plans.

4.4 Local – City of Moreno Valley

Local jurisdictions, such as the City of Moreno Valley, have the authority and responsibility to reduce air pollution through its police power and decision-making authority. Specifically, the City is responsible for the assessment and mitigation of air emissions resulting from its land use decisions. The City is also responsible for the implementation of transportation control measures as outlined in the AQMPs. Examples of such measures include bus turnouts, energy-efficient streetlights, and synchronized traffic signals. In accordance with CEQA requirements and the CEQA review process, the City assesses the air quality impacts of new development projects, requires mitigation of potentially significant air quality impacts by conditioning discretionary permits, and monitors and enforces implementation of such mitigation.

In accordance with the CEQA requirements, the City does not, however, have the expertise to develop plans, programs, procedures, and methodologies to ensure that air quality within the County and region will meet federal and state standards. Instead, the City relies on the expertise of the SCAQMD and utilizes the SCAQMD CEQA Handbook as the guidance document for the environmental review of plans and development proposals within its jurisdiction.

5.0 ENERGY CONSERVATION MANAGEMENT

The regulatory setting related to energy conservation is primarily addressed through State and City regulations, which are discussed below.

5.1 State

Energy conservation management in the State was initiated by the 1974 Warren-Alquist State Energy Resources Conservation and Development Act that created the California Energy Resource Conservation and Development Commission (currently named California Energy Commission [CEC]), which was originally tasked with certifying new electric generating plants based on the need for the plant and the suitability of the site of the plant. In 1976 the Warren-Alquist Act was expanded to include new restrictions on nuclear generating plants, that effectively resulted in a moratorium of any new nuclear generating plants in the State. The following details specific regulations adopted by the State in order to reduce the consumption of energy.

California Code of Regulations (CCR) Title 20

On November 3, 1976 the CEC adopted the *Regulations for Appliance Efficiency Standards Relating to Refrigerators, Refrigerator-Freezers and Freezers and Air Conditioners,* which were the first energy-efficiency standards for appliances. The appliance efficiency regulations have been updated several times by the Commission and the most current version is the *2016 Appliance Efficiency Regulations,* adopted January 2017 and now includes almost all types of appliances and lamps that use electricity, natural gas as well as plumbing fixtures. The authority for the CEC to control the energy-efficiency of appliances is detailed in California Code of Regulations (CCR), Title 20, Division 2, Chapter 4, Article 4, Sections 1601-1609.

California Code of Regulations (CCR) Title 24, Part 6

The CEC is also responsible for implementing the CCR Title 24, Part 6: California's Energy Efficiency Standards for Residential and Nonresidential Buildings (Title 24 Part 6) that were first established in 1978 in response to a legislative mandate to reduce California's energy consumption. In 2008 the State set an energy-use reduction goal of zero-net-energy use of all new homes by 2020 and the CEC was mandated to meet this goal through revisions to the Title 24, Part 6 regulations.

The Title 24 standards are updated on a three-year schedule and since 2008 the standards have been incrementally moving to the 2020 goal of the zero-net-energy use. On January 1, 2020 the 2019 standards went into effect, that have been designed so that the average new home built in California will now use zero-net-energy and that non-residential buildings will use about 30 percent less energy than the 2016 standards due mainly to lighting upgrades. The 2019 standards also encourage the use of battery storage and heat pump water heaters, require the more widespread use of LED lighting, as well as improve the building's thermal envelope through high performance attics, walls and windows. The 2019 standards also require improvements to ventilation systems by requiring highly efficient air filters to trap hazardous air particulates as well as improvements to kitchen ventilation systems.

California Code of Regulations (CCR) Title 24, Part 11

CCR Title 24, Part 11: California Green Building Standards (CalGreen) was developed in response to continued efforts to reduce GHG emissions associated with energy consumption. The CalGreen Building

Standards are also updated every three years and the current version is the 2019 California Green Building Standard Code that become effective on January 1, 2020.

The CALGreen Code contains requirements for construction site selection; storm water control during construction; construction waste reduction; indoor water use reduction; material selection; natural resource conservation; site irrigation conservation; and more. The code provides for design options allowing the designer to determine how best to achieve compliance for a given site or building condition. The code also requires building commissioning, which is a process for verifying that all building systems (e.g., heating and cooling equipment and lighting systems) are functioning at their maximum efficiency.

The CALGreen Code provides standards for bicycle parking, carpool/vanpool/electric vehicle spaces, light and glare reduction, grading and paving, energy efficient appliances, renewable energy, graywater systems, water efficient plumbing fixtures, recycling and recycled materials, pollutant controls (including moisture control and indoor air quality), acoustical controls, storm water management, building design, insulation, flooring, and framing, among others. Implementation of the CALGreen Code measures reduces energy consumption and vehicle trips and encourages the use of alternative-fuel vehicles, which reduces pollutant emissions.

Some of the notable changes in the 2019 CALGreen Code over the prior 2016 CALGreen Code include: an alignment of building code engineering requirements with the national standards that include anchorage requirements for solar panels, provides design requirements for buildings in tsunami zones, increases Minimum Efficiency Reporting Value (MERV) for air filters from 8 to 13, increased electric vehicle charging requirements in parking areas, and sets minimum requirements for use of shade trees.

Executive Order N-79-20

The California Governor issued Executive Order N-79-20 on September 23, 2020 that requires all new passenger cars and trucks and commercial drayage trucks sold in California to be zero-emissions by the year 2035 and all medium- heavy-duty vehicles (commercial trucks) sold in the state to be zero-emission by 2045 for all operations where feasible. Executive Order N-79-20 also requires all off-road vehicles and equipment to transition to 100 percent zero-emission equipment, where feasible by 2035.

Senate Bill 100

Senate Bill 100 (SB 100) was adopted September 2018 and requires that by December 1, 2045 that 100 percent of retail sales of electricity to be generated from renewable or zero-carbon emission sources of electricity. SB 100 supersedes the renewable energy requirements set by SB 350, SB 1078, SB 107, and SB X1-2. SB 100 codified the interim renewable energy thresholds from the prior Bills of: 33 percent by 2020, 40 percent by December 31, 2024, 45 percent by December 31, 2027, and 50 percent by December 31, 2030.

Executive Order B-48-18 and Assembly Bill 2127

The California Governor issued Executive Order B-48-18 on January 26, 2018 that orders all state entities to work with the private sector to put at least five million zero-emission vehicles on California roads by 2030 and to install 200 hydrogen fueling stations and 250,000 electric vehicle chargers by 2025. Currently there are approximately 350,000 electric vehicles operating in California, which represents approximately 1.5 percent of the 24 million vehicles total currently operating in California. Implementation of Executive Order B-48-18 would result in approximately 20 percent of all vehicles in California to be zero emission electric vehicles. Assembly Bill 2127 (AB 2127) was codified into statute on September 13, 2018 and

requires that the California Energy Commission working with the State Air Resources Board prepare biannual assessments of the statewide electric vehicle charging infrastructure needed to support the levels of zero emission vehicle adoption required for the State to meet its goals of putting at least 5 million zero-emission vehicles on California roads by 2030.

Assembly Bill 1109

California Assembly Bill 1109 (AB 1109) was adopted October 2007, also known as the Lighting Efficiency and Toxics Reduction Act, prohibits the manufacturing of lights after January 1, 2010 that contain levels of hazardous substances prohibited by the European Union pursuant to the RoHS Directive. AB 1109 also requires reductions in energy usage for lighting and is structured to reduce lighting electrical consumption by: (1) At least 50 percent reduction from 2007 levels for indoor residential lighting; and (2) At least 25 percent reduction from 2007 levels for indoor commercial and all outdoor lighting by 2018. AB 1109 would reduce GHG emissions through reducing the amount of electricity required to be generated by fossil fuels in California.

Assembly Bill 1493

California Assembly Bill 1493 (also known as the Pavley Bill, in reference to its author Fran Pavley) was enacted on July 22, 2002 and required CARB to develop and adopt regulations that reduce GHGs emitted by passenger vehicles and light duty trucks. In 2004, CARB approved the "Pavley I" regulations limiting the amount of GHGs that may be released from new passenger automobiles that are being phased in between model years 2009 through 2016. These regulations will reduce GHG emissions by 30 percent from 2002 levels by 2016. In June 2009, the EPA granted California the authority to implement GHG emission reduction standards for light duty vehicles, in September 2009, amendments to the Pavley I regulations were adopted by CARB and implementation of the "Pavley I" regulations started in 2009.

The second set of regulations "Pavley II" was developed in 2010, and is being phased in between model years 2017 through 2025 with the goal of reducing GHG emissions by 45 percent by the year 2020 as compared to the 2002 fleet. The Pavley II standards were developed by linking the GHG emissions and formerly separate toxic tailpipe emissions standards previously known as the "LEV III" (third stage of the Low Emission Vehicle standards) into a single regulatory framework. The new rules reduce emissions from gasoline-powered cars as well as promote zero-emissions auto technologies such as electricity and hydrogen, and through increasing the infrastructure for fueling hydrogen vehicles. In 2009, the U.S. EPA granted California the authority to implement the GHG standards for passenger cars, pickup trucks and sport utility vehicles and these GHG emissions standards are currently being implemented nationwide. However, EPA has performed a midterm evaluation of the longer-term standards for model years 2022-2025, and based on the findings of this midterm evaluation, the EPA proposed The Safer Affordable Fuel Efficient (SAFE) Vehicles Proposed Rule for Model Years 2021-2026 that amends the corporate average fuel economy (CAFE) and GHG emissions standards for light vehicles for model years 2021 through 2026. The EPA's proposed amendments do not include any extension of the legal waiver granted to California by the 1970 Clean Air Act and which has allowed the State to set tighter standards for vehicle pipe emissions than the EPA standards. On September 20, 2019, California filed suit over the EPA decision to revoke California's legal waiver that has been joined by 22 other states.

5.2 Local – City of Moreno Valley

The applicable energy plan for the proposed project is the *City of Moreno Valley General Plan 2040* (General Plan 2040), adopted June 15, 2021. The applicable energy-related goals and policies in the General Plan for the proposed project are shown below.

Goal OSRC-3: Use energy and water wisely and promote reduced consumption.

Policies

- OSRC.3.1: Promote energy conservation throughout the community and encourage the use of renewable energy systems and technologies to supplement or replace traditional building energy systems.
- OSRC.3-5: Promote the retention and reuse of rainwater onsite and promote the use of rain barrels or other rainwater reuse systems throughout the community.
- OSRC.3-6: Encourage new development to incorporate as many water-wise practices as feasible in their design and construction.
- OSRC.3-7: Conserve water through the provision of water-efficient infrastructure, drought tolerant plantings, and greywater usage to support public parks and landscaped areas.
- OSRC.3-8: Conserve water through the planting and maintenance of trees, which will provide for the capture of precipitation and runoff to recharge groundwater, in addition to providing shading for other landscaping to reduce irrigation requirements. Ensure that any 'community greening' projects utilize water-efficient landscape.

6.0 GLOBAL CLIMATE CHANGE MANAGEMENT

The regulatory setting related to global climate change is addressed through the efforts of various international, federal, state, regional, and local government agencies. These agencies work jointly, as well as individually, to reduce GHG emissions through legislation, regulations, planning, policy-making, education, and a variety of programs. The agencies responsible for global climate change regulations are discussed below.

6.1 International

In 1988, the United Nations established the IPCC to evaluate the impacts of global climate change and to develop strategies that nations could implement to curtail global climate change. In 1992, the United States joined other countries around the world in signing the United Nations' Framework Convention on Climate Change (UNFCCC) agreement with the goal of controlling GHG emissions. The parties of the UNFCCC adopted the Kyoto Protocol, which set binding GHG reduction targets for 37 industrialized countries, the objective of reducing their collective GHG emissions by five percent below 1990 levels by 2012. The Kyoto Protocol has been ratified by 182 countries, but has not been ratified by the United States. It should be noted that Japan and Canada opted out of the Kyoto Protocol and the remaining developed countries that ratified the Kyoto Protocol have not met their Kyoto targets. The Kyoto Protocol expired in 2012 and the amendment for the second commitment period from 2013 to 2020 has not yet entered into legal force. The Parties to the Kyoto Protocol negotiated the Paris Agreement in December 2015, agreeing to set a goal of limiting global warming to less than 2 degrees Celsius compared with preindustrial levels. The Paris Agreement has been adopted by 195 nations with 147 ratifying it, including the United States by President Obama, who ratified it by Executive Order on September 3, 2016. On June 1, 2017, President Trump announced that the United States is withdrawing from the Paris Agreement and on January 21, 2021 President Biden signed an executive order rejoining the Paris Agreement.

Additionally, the Montreal Protocol was originally signed in 1987 and substantially amended in 1990 and 1992. The Montreal Protocol stipulates that the production and consumption of compounds that deplete ozone in the stratosphere—CFCs, halons, carbon tetrachloride, and methyl chloroform—were to be phased out, with the first three by the year 2000 and methyl chloroform by 2005.

6.2 Federal – United States Environmental Protection Agency

The United States Environmental Protection Agency (EPA) is responsible for implementing federal policy to address global climate change. The Federal government administers a wide array of public-private partnerships to reduce U.S. GHG intensity. These programs focus on energy efficiency, renewable energy, methane, and other non-CO₂ gases, agricultural practices and implementation of technologies to achieve GHG reductions. EPA implements several voluntary programs that substantially contribute to the reduction of GHG emissions.

In Massachusetts v. Environmental Protection Agency (Docket No. 05–1120), argued November 29, 2006 and decided April 2, 2007, the U.S. Supreme Court held that not only did the EPA have authority to regulate greenhouse gases, but the EPA's reasons for not regulating this area did not fit the statutory requirements. As such, the U.S. Supreme Court ruled that the EPA should be required to regulate CO2 and other greenhouse gases as pollutants under the federal Clean Air Act (CAA).

In response to the FY2008 Consolidations Appropriations Act (H.R. 2764; Public Law 110-161), EPA proposed a rule on March 10, 2009 that requires mandatory reporting of GHG emissions from large sources in the United States. On September 22, 2009, the Final Mandatory Reporting of GHG Rule was signed and published in the Federal Register on October 30, 2009. The rule became effective on December 29, 2009. This rule requires suppliers of fossil fuels or industrial GHGs, manufacturers of vehicles and engines, and facilities that emit 25,000 metric tons or more per year of GHG emissions to submit annual reports to EPA.

On December 7, 2009, the EPA Administrator signed two distinct findings under section 202(a) of the Clean Air Act. One is an endangerment finding that finds concentrations of the six GHGs in the atmosphere threaten the public health and welfare of current and future generations. The other is a cause or contribute finding, that finds emissions from new motor vehicles and new motor vehicle engines contribute to the GHG pollution which threatens public health and welfare. These actions did not impose any requirements on industry or other entities, however, since 2009 the EPA has been providing GHG emission standards for vehicles and other stationary sources of GHG emissions that are regulated by the EPA. On September 13, 2013 the EPA Administrator signed 40 CFR Part 60, that limits emissions from new sources to 1,100 pounds of CO₂ per mega-watt hour (MWh) for fossil fuel-fired utility boilers and 1,000 pounds of CO₂ per MWh for large natural gas-fired combustion units.

On August 3, 2015, the EPA announced the Clean Power Plan, emissions guidelines for U.S. states to follow in developing plans to reduce GHG emissions from existing fossil fuel-fired power plants (Federal Register Vol. 80, No. 205, October 23 2015). On October 11, 2017, the EPA issued a formal proposal to repeal the Clean Power Plan and on June 19, 2019 the EPA replaced the Clean Power Plan with the Affordable Clean Energy rule that is anticipated to lower power sector GHG emissions by 11 million tons by the year 2030.

On April 30, 2020, the EPA and the National Highway Safety Administration published the Final Rule for the Safer Affordable Fuel-Efficient (SAFE) Vehicles Rule for Model Years 2021-2026 Passenger Cars and Light Trucks (SAFE Vehicles Rule). Part One of the Rule revokes California's authority to set its own GHG emissions standards and zero-emission vehicle mandates in California, which results in one emission standard to be used nationally for all passenger cars and light trucks that is set by the EPA.

6.3 State

The CARB has the primary responsible for implementing state policy to address global climate change, however there are State regulations related to global climate change that affect a variety of State agencies. CARB, which is a part of the California Environmental Protection Agency, is responsible for the coordination and administration of both the federal and state air pollution control programs within California. In this capacity, the CARB conducts research, sets California Ambient Air Quality Standards (CAAQS), compiles emission inventories, develops suggested control measures, provides oversight of local programs, and prepares the SIP. In addition, the CARB establishes emission standards for motor vehicles sold in California, consumer products (e.g. hairspray, aerosol paints, and barbeque lighter fluid), and various types of commercial equipment. It also sets fuel specifications to further reduce vehicular emissions.

In 2008, CARB approved a Climate Change Scoping Plan that proposes a "comprehensive set of actions designed to reduce overall carbon GHG emissions in California, improve our environment, reduce our dependence on oil, diversify our energy sources, save energy, create new jobs, and enhance public health" (CARB 2008). The Climate Change Scoping Plan has a range of GHG reduction actions which include direct

regulations; alternative compliance mechanisms; monetary and non-monetary incentives; voluntary actions; market-based mechanisms such as a cap-and-trade system. In 2014, CARB approved the First Update to the Climate Change Scoping Plan (CARB, 2014) that identifies additional strategies moving beyond the 2020 targets to the year 2050. On December 14, 2017 CARB adopted the California's 2017 Climate Change Scoping Plan, November 2017 (CARB, 2017) that provides specific statewide policies and measures to achieve the 2030 GHG reduction target of 40 percent below 1990 levels by 2030 and the aspirational 2050 GHG reduction target of 80 percent below 1990 levels by 2050. In addition, the State has passed the following laws directing CARB to develop actions to reduce GHG emissions, which are listed below in chronological order, with the most current first.

Executive Order N-79-20

EO N-79-20 establish targets for when all new vehicles and equipment are zero-emission and is described in more detail above in Section 5.1 under Energy Conservation Management.

California Code of Regulations (CCR) Title 24, Part 6

The Title 24 Part 6 standards have been developed by the CEC primarily for energy conservation and is described in more detail above in Section 5.1 under Energy Conservation Management. It should be noted that implementation of the Title 24 Part 6 building standards would also reduce GHG emissions, since as detailed above in Section 3.3 Greenhouse Gas Emissions Inventory, energy use for residential and commercial buildings creates 9.7 percent of the GHG emissions in the State.

California Code of Regulations (CCR) Title 24, Part 11

The CalGreen Building standards have been developed by the CEC primarily for energy conservation and is described in more detail above in Section 5.1 under Energy Conservation Management. It should be noted that implementation of the CalGreen Building standards would also reduce GHG emissions, since as detailed above under Title 24, Part 6, energy usage from buildings creates 9.7 percent of GHG emissions in the State.

Senate Bill 100

SB 100 requires that by December 1, 2045 that 100 percent of retail sales of electricity to be generated from renewable or zero-carbon emission sources of electricity and is described in more detail above in Section 5.1 under Energy Conservation Management.

Executive Order B-48-18 and Assembly Bill 2127

Executive Order B-48-18 and AB 2127 provides measures to put at least five million zero-emission vehicles on California roads by 2030 and to install 200 hydrogen fueling stations and 250,000 electric vehicle chargers by 2025 and is described in more detail above in Section 5.1 under Energy Conservation Management.

Executive Order B-30-15, Senate Bill 32 and Assembly Bill 197

The California Governor issued Executive Order B-30-15 on April 29, 2015 that aims to reduce California's GHG emissions 40 percent below 1990 levels by 2030. This executive order aligns California's GHG reduction targets with those of other international governments, such as the European Union that set the same target for 2030 in October, 2014. This target will make it possible to reach the ultimate goal of reducing GHG emissions 80 percent under 1990 levels by 2050 that is based on scientifically established levels needed in the U.S.A to limit global warming below 2 degrees Celsius – the warming threshold at

which scientists say there will likely be major climate disruptions such as super droughts and rising sea levels. Assembly Bill 197 (AB 197) (September 8, 2016) and Senate Bill 32 (SB 32) (September 8, 2016) codified into statute the GHG emissions reduction targets of at least 40 percent below 1990 levels by 2030 as detailed in Executive Order B-30-15. AB 197 also requires additional GHG emissions reporting that is broken down to sub-county levels and requires CARB to consider the social costs of emissions impacting disadvantaged communities.

Executive Order B-29-15

The California Governor issued Executive Order B-29-15 on April 1, 2015 and directed the State Water Resources Control Board to impose restrictions to achieve a statewide 25% reduction in urban water usage and directed the Department of Water Resources to replace 50 million square feet of lawn with drought tolerant landscaping through an update to the State's Model Water Efficient Landscape Ordinance. The Ordinance also requires installation of more efficient irrigation systems, promotion of greywater usage and onsite stormwater capture, and limits the turf planted in new residential landscapes to 25 percent of the total area and restricts turf from being planted in median strips or in parkways unless the parkway is next to a parking strip and a flat surface is required to enter and exit vehicles. Executive Order B-29-15 would reduce GHG emissions associated with the energy used to transport and filter water.

Assembly Bill 341 and Senate Bills 939 and 1374

Senate Bill 939 (SB 939) requires that each jurisdiction in California to divert at least 50 percent of its waste away from landfills, whether through waste reduction, recycling or other means. Senate Bill 1374 (SB 1374) requires the California Integrated Waste Management Board to adopt a model ordinance by March 1, 2004 suitable for adoption by any local agency to require 50 to 75 percent diversion of construction and demolition of waste materials from landfills. Assembly Bill 341 (AB 341) was adopted in 2011 and builds upon the waste reduction measures of SB 939 and 1374, and set a new target of a 75 percent reduction in solid waste generated by the year 2020.

Senate Bill 375

Senate Bill 375 (SB 375) was adopted September 2008 in order to support the State's climate action goals to reduce GHG emissions from transportation sources through coordinated regional transportation planning efforts, regional GHG emission reduction targets, and land use and housing allocation. SB 375 requires CARB to set regional targets for GHG emissions reductions from passenger vehicle use. In 2010, CARB established targets for 2020 and 2035 for each Metropolitan Planning Organizations (MPO) within the State. It was up to each MPO to adopt a sustainable communities strategy (SCS) that will prescribe land use allocation in that MPOs Regional Transportation Plan (RTP) to meet CARB's 2020 and 2035 GHG emission reduction targets. These reduction targets are required to be updated every eight years and the most current targets are detailed at: https://ww2.arb.ca.gov/our-work/programs/sustainable-communities-program/regional-plan-targets, which provides GHG emissions reduction targets for SCAG of 8 percent by 2020 and 19 percent by 2035.

The Connect SoCal (SCAG, 2020) provides a 2035 GHG emission reduction target of 19 percent reduction over the 2005 per capita emissions levels. The Connect SoCal include new initiatives of land use, transportation and technology to meet the 19 percent GHG emission reduction target for 2035. CARB is also charged with reviewing SCAG's RTP/SCS for consistency with its assigned targets.

City and County land use policies, including General Plans, are not required to be consistent with the RTP and associated SCS. However, new provisions of CEQA incentivize, through streamlining and other

provisions, qualified projects that are consistent with an approved SCS and categorized as "transit priority projects."

Assembly Bill 1109

AB 1109 requires reductions in energy usage for lighting and is described in more detail above in Section 5.1 under Energy Conservation Management.

Executive Order S-1-07

Executive Order S-1-07 was issued in 2007 and proclaims that the transportation sector is the main source of GHG emissions in the State, since it generates more than 40 percent of the State's GHG emissions. It establishes a goal to reduce the carbon intensity of transportation fuels sold in the State by at least ten percent by 2020. This Executive Order also directs CARB to determine whether this Low Carbon Fuel Standard (LCFS) could be adopted as a discrete early-action measure as part of the effort to meet the mandates in AB 32.

In 2009 CARB approved the proposed regulation to implement the LCFS. The standard was challenged in the courts, but has been in effect since 2011 and was re-approved by the CARB in 2015. The LCFS is anticipated to reduce GHG emissions by about 16 MMT per year by 2020. The LCFS is designed to provide a framework that uses market mechanisms to spur the steady introduction of lower carbon fuels. The framework establishes performance standards that fuel producers and importers must meet annually. Reformulated gasoline mixed with corn-derived ethanol and low-sulfur diesel fuel represent the baseline fuels. Lower carbon fuels may be ethanol, biodiesel, renewable diesel, or blends of these fuels with gasoline or diesel. Compressed natural gas and liquefied natural gas also may be low-carbon fuels. Hydrogen and electricity, when used in fuel cells or electric vehicles, are also considered as low-carbon fuels.

Senate Bill 97

Senate Bill 97 (SB 97) was adopted August 2007 and acknowledges that climate change is a prominent environmental issue that requires analysis under CEQA. SB 97 directed the Governor's Office of Planning and Research (OPR), which is part of the State Natural Resources Agency, to prepare, develop, and transmit to CARB guidelines for the feasible mitigation of GHG emissions or the effects of GHG emissions, as required by CEQA, by July 1, 2009. The Natural Resources Agency was required to certify and adopt those guidelines by January 1, 2010.

Pursuant to the requirements of SB 97 as stated above, on December 30, 2009 the Natural Resources Agency adopted amendments to the State CEQA guidelines that addresses GHG emissions. The CEQA Guidelines Amendments changed 14 sections of the CEQA Guidelines and incorporated GHG language throughout the Guidelines. However, no GHG emissions thresholds of significance were provided and no specific mitigation measures were identified. The GHG emission reduction amendments went into effect on March 18, 2010 and are summarized below:

- Climate Action Plans and other greenhouse gas reduction plans can be used to determine whether a project has significant impacts, based upon its compliance with the plan.
- Local governments are encouraged to quantify the GHG emissions of proposed projects, noting
 that they have the freedom to select the models and methodologies that best meet their needs
 and circumstances. The section also recommends consideration of several qualitative factors that
 may be used in the determination of significance, such as the extent to which the given project

complies with state, regional, or local GHG reduction plans and policies. OPR does not set or dictate specific thresholds of significance. Consistent with existing CEQA Guidelines, OPR encourages local governments to develop and publish their own thresholds of significance for GHG impacts assessment.

- When creating their own thresholds of significance, local governments may consider the thresholds of significance adopted or recommended by other public agencies, or recommended by experts.
- New amendments include guidelines for determining methods to mitigate the effects of GHG emissions in Appendix F of the CEQA Guidelines.
- OPR is clear to state that "to qualify as mitigation, specific measures from an existing plan must be identified and incorporated into the project; general compliance with a plan, by itself, is not mitigation."
- OPR's emphasizes the advantages of analyzing GHG impacts on an institutional, programmatic level. OPR therefore approves tiering of environmental analyses and highlights some benefits of such an approach.
- Environmental impact reports must specifically consider a project's energy use and energy efficiency potential.

Assembly Bill 32

In 2006, the California State Legislature adopted AB 32, the California Global Warming Solutions Act of 2006. AB 32 requires CARB, to adopt rules and regulations that would achieve GHG emissions equivalent to statewide levels in 1990 by 2020 through an enforceable statewide emission cap which will be phased in starting in 2012. Emission reductions shall include carbon sequestration projects that would remove carbon from the atmosphere and utilize best management practices that are technologically feasible and cost effective.

In 2007 CARB released the calculated Year 1990 GHG emissions of 431 MMTCO₂e. The 2020 target of 431 MMTCO₂e requires the reduction of 78 MMTCO₂e, or approximately 16 percent from the State's projected 2020 business as usual emissions of 509 MMTCO₂e (CARB, 2014). Under AB 32, CARB was required to adopt regulations by January 1, 2011 to achieve reductions in GHGs to meet the 1990 cap by 2020. Early measures CARB took to lower GHG emissions included requiring operators of the largest industrial facilities that emit 25,000 metric tons of CO_2 in a calendar year to submit verification of GHG emissions by December 1, 2010. The CARB Board also approved nine discrete early action measures that include regulations affecting landfills, motor vehicle fuels, refrigerants in cars, port operations and other sources, all of which became enforceable on or before January 1, 2010.

CARB's Scoping Plan that was adopted in 2009, proposes a variety of measures including: strengthening energy efficiency and building standards; targeted fees on water and energy use; a market-based capand-trade system; achieving a 33 percent renewable energy mix; and a fee regulation to fund the program. The 2014 update to the Scoping Plan identifies strategies moving beyond the 2020 targets to the year 2050.

The Cap-and-Trade Program established under the Scoping Plan sets a statewide limit on sources responsible for 85 percent of California's GHG emissions, and has established a market for long-term investment in energy efficiency and cleaner fuels since 2012.

Executive Order S-3-05

In 2005 the California Governor issued Executive Order S 3-05, GHG Emission, which established the following reduction targets:

- 2010: Reduce greenhouse gas emissions to 2000 levels;
- 2020: Reduce greenhouse gas emissions to 1990 levels;
- 2050: Reduce greenhouse gas emissions to 80 percent below 1990 levels.

The Executive Order directed the secretary of the California Environmental Protection Agency (CalEPA) to coordinate a multi-agency effort to reduce GHG emissions to the target levels. To comply with the Executive Order, the secretary of CalEPA created the California Climate Action Team (CAT), made up of members from various state agencies and commissions. The team released its first report in March 2006. The report proposed to achieve the targets by building on the voluntary actions of businesses, local governments, and communities and through State incentive and regulatory programs. The State achieved its first goal of reducing GHG emissions to 2000 levels by 2010.

Assembly Bill 1493

AB 1493 or the Pavley Bill sets tailpipe GHG emissions limits for passenger vehicles in California as well as fuel economy standards and is described in more detail above in Section 5.1 under Energy Conservation Management.

6.4 Regional – Southern California

The SCAQMD is the agency principally responsible for comprehensive air pollution control in the Air Basin. To that end, as a regional agency, the SCAQMD works directly with SCAG, county transportation commissions, and local governments and cooperates actively with all federal and state agencies.

South Coast Air Quality Management District

SCAQMD develops rules and regulations, establishes permitting requirements for stationary sources, inspects emission sources, and enforces such measures through educational programs or fines, when necessary. SCAQMD is directly responsible for reducing emissions from stationary, mobile, and indirect sources. The SCAQMD is also responsible for GHG emissions for projects where it is the lead agency. However, for other projects in the Air Basin where it is not the lead agency, it is limited to providing resources to other lead agencies in order to assist them in determining GHG emission thresholds and GHG reduction measures. In order to assist local agencies with direction on GHG emissions, the SCAQMD organized a Working Group, which is described below.

SCAQMD Working Group

Since neither CARB nor the OPR has developed GHG emissions threshold, the SCAQMD formed a Working Group to develop significance thresholds related to GHG emissions. At the September 28, 2010 Working Group meeting, the SCAQMD released its most current version of the draft GHG emissions thresholds, which recommends a tiered approach that either provides a quantitative annual thresholds of 3,500 MTCO₂e for residential uses, 1,400 MTCO₂e for commercial uses, 3,000 MTCO₂e for mixed uses, and 10,000 MTCO₂e for industrial uses.

Southern California Association of Governments

The SCAG is the regional planning agency for Los Angeles, Orange, Ventura, Riverside, San Bernardino, and Imperial Counties and addresses regional issues relating to transportation, the economy, community development and the environment. SCAG is the federally designated Metropolitan Planning Organization (MPO) for the majority of the southern California region and is the largest MPO in the nation. With respect to air quality planning, SCAG has prepared the Connect SoCal and 2019 FTIP addresses regional development and growth forecasts. Although the Connect SoCal and 2019 FTIP are primarily planning documents for future transportation projects a key component of these plans are to integrate land use planning with transportation planning that promotes higher density infill development in close proximity to existing transit service. These plans form the basis for the land use and transportation components of the AQMP, which are utilized in the preparation of air quality forecasts and in the consistency analysis included in the AQMP. The Connect SoCal, 2019FTIP, and AQMP are based on projections originating within the City and County General Plans.

6.5 Local - City of Moreno Valley

The City of Moreno Valley has prepared the City of Moreno Valley Climate Action Plan (2021 CAP), adopted June 15, 2021. The 2021 CAP reflects the guidelines established in the 2017 Climate Change Scoping Plan (CARB, 2017) that was designed to implement the GHG emissions reduction targets set in Executive Order S-3-15 and Senate Bill 32 that recommend local governments target of 6.0 MTCO₂e per capita per year by 2030 and 2.0 MTCO₂e per year by 2050 in their CAPs. The 2021 CAP has adopted a proposed target of 4.0 MTCO₂e per capita per year by 2040, that was determined using a linear trajectory in emissions reduction between 2030 and 2050.

7.0 ATMOSPHERIC SETTING

7.1 South Coast Air Basin

The project site is located within the western portion of Riverside County, which is part of the South Coast Air Basin (Air Basin) that includes the non-desert portions of Riverside, San Bernardino, and Los Angeles Counties and all of Orange County. The Air Basin is located on a coastal plain with connecting broad valleys and low hills to the east. Regionally, the Air Basin is bounded by the Pacific Ocean to the southwest and high mountains to the east forming the inland perimeter.

7.2 Local Climate

The climate of western Riverside County, technically called an interior valley subclimate of the Southern California's Mediterranean-type climate, is characterized by hot dry summers, mild moist winters with infrequent rainfall, moderate afternoon breezes, and generally fair weather. Occasional periods of strong Santa Ana winds and winter storms interrupt the otherwise mild weather pattern. The clouds and fog that form along the area's coastline rarely extend as far inland as western Riverside County. When morning clouds and fog form, they typically burn off quickly after sunrise. The most important weather pattern from an air quality perspective is associated with the warm season airflow across the densely populated areas located west of the project site. This airflow brings polluted air into western Riverside County late in the afternoon. This transport pattern creates unhealthful air quality that may extend to the project site particularly during the summer months.

Winds are an important parameter in characterizing the air quality environment of a project site because they both determine the regional pattern of air pollution transport and control the rate of dispersion near a source. Daytime winds in western Riverside County are usually light breezes from off the coast as air moves regionally onshore from the cool Pacific Ocean to the warm Mojave Desert interior of Southern California. These winds allow for good local mixing, but as discussed above, these coastal winds carry significant amounts of industrial and automobile air pollutants from the densely urbanized western portion of the Air Basin into the interior valleys which become trapped by the mountains that border the eastern and northern edges of the Air Basin.

In the summer, strong temperature inversions may occur that limit the vertical depth through which air pollution can be dispersed. Air pollutants concentrate because they cannot rise through the inversion layer and disperse. These inversions are more common and persistent during the summer months. Over time, sunlight produces photochemical reactions within this inversion layer that creates ozone, a particularly harmful air pollutant. Occasionally, strong thermal convections occur which allows the air pollutants to rise high enough to pass over the mountains and ultimately dilute the smog cloud.

In the winter, light nocturnal winds result mainly from the drainage of cool air off of the mountains toward the valley floor while the air aloft over the valley remains warm. This forms a type of inversion known as a radiation inversion. Such winds are characterized by stagnation and poor local mixing and trap pollutants such as automobile exhaust near their source. While these inversions may lead to air pollution "hot spots" in heavily developed coastal areas of the Air Basin, there is not enough traffic in inland valleys to cause any winter air pollution problems. Despite light wind conditions, especially at night and in the early morning, winter is generally a period of good air quality in the project vicinity.

The temperature and precipitation levels for the Riverside Citrus EXP Monitoring Station, which is the nearest weather station to the project site with historical data are shown below in Table D. Table D shows that August is typically the warmest month and January is typically the coolest month. Rainfall in the project area varies considerably in both time and space. Almost all the annual rainfall comes from the fringes of mid-latitude storms from late November to early April, with summers being almost completely dry.

Table D – Monthly Climate Data

Month	Average Maximum Temperature (°F)	Average Minimum Temperature (°F)	Average Total Precipitation (inches)
January	66.6	41.7	2.12
February	67.9	43.3	2.16
March	70.2	45.0	1.64
April	75.1	47.9	0.78
May	79.6	52.7	0.23
June	86.5	56.3	0.06
July	94.0	60.8	0.04
August	94.4	61.3	0.11
September	90.7	58.5	0.24
October	82.5	52.5	0.32
November	73.5	45.5	0.92
December	67.5	41.3	1.22
Annual	79.0	50.5	9.86

Source: https://wrcc.dri.edu/cgi-bin/cliMAIN.pl?ca7473

7.3 Monitored Local Air Quality

SCAQMD has divided the Air Basin into 38 air-monitoring areas. The project site is located in Air Monitoring Area 24, which is located in western Riverside County and covers the Perris and Moreno Valley areas to the San Bernardino County Line. Since not all air monitoring stations measure all of the tracked pollutants, the data from the following two monitoring stations, listed in the order of proximity to the project site have been used; Perris Monitoring Station (Perris Station) and Riverside-Rubidoux Monitoring Station (Riverside-Rubidoux Station).

The Perris Station is located approximately nine miles south of the project site at 237 % N. D Street, Perris and the Riverside-Rubidoux Station is located approximately 15 miles northwest of the project site at 5888 Mission Boulevard, Rubidoux. The monitoring data is presented in Table E and shows the most recent three years of monitoring data from CARB. Ozone and PM10 were measured at the Perris Station and NO₂ and PM2.5 were measured at the Riverside-Rubidoux Station. CO measurements have not been provided, since CO is currently in attainment in the Air Basin and monitoring of CO within the Air Basin ended on March 31, 2013.

Table E – Local Area Air Quality Monitoring Summary

		Year	
Pollutant (Standard)	2018	2019	2020
Ozone ¹ :			
Maximum 1-Hour Concentration (ppm)	0.117	0.118	0.125
Days > CAAQS (0.09 ppm)	31	28	34
Maximum 8-Hour Concentration (ppm)	0.103	0.095	0.106
Days > NAAQS (0.070 ppm)	67	64	74
Days > CAAQs (0.070 ppm)	68	66	77
Nitrogen Dioxide ² :			
Maximum 1-Hour Concentration (ppb)	55.4	56.0	62.0
Days > NAAQS (100 ppb)	0	0	0
Days > CAAQS (180 ppb)	0	0	0
Inhalable Particulates (PM10) 1:			
Maximum 24-Hour National Measurement (ug/m³)	64.4	97.0	92.3
Days > NAAQS (150 ug/m³)	0	0	0
Days > CAAQS (50 ug/m³)	2	4	6
Annual Arithmetic Mean (AAM) (ug/m³)	30.2	25.8	33.4
Annual > NAAQS (50 ug/m³)	No	No	No
Annual > CAAQS (20 ug/m³)	Yes	Yes	Yes
Ultra-Fine Particulates (PM2.5) 2:			
Maximum 24-Hour National Measurement (ug/m³)	66.3	55.7	59.9
Days > NAAQS (35 ug/m³)	3	5	12
Annual Arithmetic Mean (AAM) (ug/m³)	12.6	11.2	14.1
Annual > NAAQS and CAAQS (12 ug/m³)	Yes	No	Yes

Notes: Exceedances are listed in **bold.** CAAQS = California Ambient Air Quality Standard; NAAQS = National Ambient Air Quality Standard; ppm = parts per million; ppb = parts per billion; ND = no data available.

Source: http://www.arb.ca.gov/adam/

Table E shows that ozone and particulate matter (PM10 and PM2.5) are the air pollutants of primary concern in the project area, which are detailed below:

Ozone

The State 1-hour concentration standard for ozone has been exceeded between 28 and 34 days each year over the past three years at the Perris Station. The State 8-hour ozone standard has been exceeded between 66 and 77 days each year over the past three years at the Perris Station. The Federal 8-hour ozone standard has been exceeded between 64 and 74 days each year over the past three years at the Perris Station.

Data obtained from the Perris Station.

 $^{^{\,2}\,}$ Data obtained from the Riverside-Rubidoux Station.

Ozone is a secondary pollutant as it is not directly emitted. Ozone is the result of chemical reactions between other pollutants, most importantly hydrocarbons and NO₂, which occur only in the presence of bright sunlight. Pollutants emitted from upwind cities react during transport downwind to produce the oxidant concentrations experienced in the area. Many areas of Southern California contribute to the ozone levels experienced at this monitoring station, with the more significant areas being those directly upwind.

Nitrogen Dioxide

The Riverside-Rubidoux Station did not record an exceedance of either the Federal or State 1-hour NO₂ standards for the last three years.

Particulate Matter

The State 24-hour concentration standard for PM10 has been exceeded between 2 and 6 days each year over the past three years at the Perris Station. Over the past three years the Federal 24-hour standard for PM10 has not been exceeded at the Perris Station. The annual PM10 concentration at the Perris Station has exceeded the State standard for the past three years and has not exceeded the Federal standard for the past three years.

Over the past three years the 24-hour concentration standard for PM2.5 has been exceeded between 3 and 12 days each year over the past three years at the Riverside-Rubidoux Station. The annual PM2.5 concentration exceeded both the State and Federal standard for two of the past three years at the Riverside-Rubidoux Station. There does not appear to be a noticeable trend for PM10 or PM2.5 in either maximum particulate concentrations or days of exceedances in the area. Particulate levels in the area are due to natural sources, grading operations, and motor vehicles.

According to the EPA, some people are much more sensitive than others to breathing fine particles (PM10 and PM2.5). People with influenza, chronic respiratory and cardiovascular diseases, and the elderly may suffer worsening illness and premature death due to breathing these fine particles. People with bronchitis can expect aggravated symptoms from breathing in fine particles. Children may experience decline in lung function due to breathing in PM10 and PM2.5. Other groups considered sensitive are smokers and people who cannot breathe well through their noses. Exercising athletes are also considered sensitive, because many breathe through their mouths during exercise.

7.4 Toxic Air Contaminant Levels in the Air Basin

In order to determine the Air Basin-wide risks associated with major airborne carcinogens, the SCAQMD conducted the Multiple Air Toxics Exposure Study (MATES) studies. According to the SCAQMD's MATES-IV study, the project site has an estimated cancer risk of 525 per million persons chance of cancer. In comparison, the average cancer risk for the Air Basin is 991 per million persons, which is based on the use of age-sensitivity factors detailed in the OEHHA Guidelines (OEHHA, 2015).

In order to provide a perspective of risk, it is often estimated that the incidence in cancer over a lifetime for the U.S. population ranges between 1 in 3 to 4 and 1 in 3, or a risk of about 300,000 per million persons. The MATES-III study referenced a Harvard Report on Cancer Prevention, which estimated that of cancers associated with known risk factors, about 30 percent were related to tobacco, about 30 percent were related to diet and obesity, and about 2 percent were associated with environmental pollution related exposures that includes hazardous air pollutants.

8.0 MODELING PARAMETERS AND ASSUMPTIONS

8.1 CalEEMod Model Input Parameters

The criteria air pollution and year 2030 GHG emissions impacts created by the proposed project have been analyzed through use of CalEEMod Version 2020.4.0. CalEEMod is a computer model published by the SCAQMD for estimating air pollutant emissions. The CalEEMod program uses the EMFAC2017 computer program to calculate the emission rates specific for the South Coast Air Basin portion of Riverside County for employee, vendor and haul truck vehicle trips and the OFFROAD2011 computer program to calculate emission rates for heavy equipment operations. EMFAC2017 and OFFROAD2011 are computer programs generated by CARB that calculates composite emission rates for vehicles. Emission rates are reported by the program in grams per trip and grams per mile or grams per running hour.

The project characteristics in the CalEEMod model were set to a project location of the South Coast Air Basin portion of Riverside County, a Climate Zone of 10, and utility company of Southern California Edison, since Moreno Valley Electric Utility is not an available option in CalEEMod. The criteria pollution calculations were analyzed based on the project opening year 2024.

Land Use Parameters

The proposed project consists of residential development that would include 67 detached single-family homes. The CalEEMod model default square footage for a single-family home is 1,800 square feet, however the architectural plans show that the proposed homes would range in size from 1,575 square feet to 2,384 square feet. In order to provide a conservative analysis, the average size of the proposed homes of 1,980 square feet per home or 132,660 square feet for the 67 single-family homes was entered into the CalEEMod model. The proposed project would also include a 0.56-acre open space park along the north side of the project site and would include onsite roads and road improvements to Oliver Street and Brodiaea Avenue that were also analyzed in the CalEEMod model. The proposed project's land use parameters that were entered into the CalEEMod model are shown in Table F.

Table F - CalEEMod Land Use Parameters

Proposed Land Use	Land Use Subtype in CalEEMod	Land Use Size ¹	Lot Acreage ²	Building/Paving ³ (square feet)
Single-Family Homes	Single-Family Housing	67 SFH	5.80	132,660
Open Space Park	City Park	0.56 AC	0.56	24,394
Onsite Roads and Improvements to Oliver Street and Brodiaea Avenue	Other Asphalt Surfaces	3.0 AC	3.00	178,596

Notes:

Construction Parameters

Construction of the proposed project is anticipated to start around November 2022 and would be completed in 14 months, which is based on the CalEEMod default timing. The construction-related GHG emissions were based on a 30-year amortization rate as recommended in the SCAQMD GHG Working Group meeting on November 19, 2009. The phases of construction activities that have been analyzed are

¹ SFH = Single Family Homes; AC = Acres.

 $^{^{\}rm 2}\,$ Lot acreage calculated based on the total project site of 8.8-acres.

³ Building/Paving square feet represent area where architectural coatings will be applied. Paved area based on CalEEMod default values.

detailed below and include: 1) Site Preparation; 2) Grading, 3) Building construction, 4) Paving; and 5) Application of architectural coatings.

The CalEEMod model provides the selection of "mitigation" to account for project conditions that would result in less emissions than a project without these conditions, however it should be noted that this "mitigation" may represent regulatory requirements. This includes the required to adherence to SCAQMD Rule 403, which requires that the Best Available Control Measures be utilized to reduce fugitive dust emissions.

Site Preparation

The site preparation phase would consist of removing any vegetation, tree stumps, and stones onsite prior to grading. The site preparation phase is anticipated to start November 2022 and was modeled as occurring over two weeks, which is based on the CalEEMod default timing. The site preparation activities would require 18 worker trips per day. In order to account for water truck emissions, six vendor truck emissions were added to the site preparation phase. The onsite equipment would consist of three rubbertired dozers and four of either tractors, loaders, or backhoes, which is based on the CalEEMod default equipment mix. The mitigation of "water all exposed areas three times per day" was chosen in order to account for the fugitive dust reduction that would occur through adhering to SCAQMD Rule 403, which requires that the Best Available Control Measures be utilized to reduce fugitive dust emissions.

Grading

The grading phase would occur after completion of the site preparation phase and was modeled as occurring over four weeks, which is based on the CalEEMod default timing. It is anticipated that the grading would likely be balanced, which would result in no dirt being imported or exported from the project site. The onsite grading equipment would consist of one excavator, one grader, one rubber-tired dozer, and three of either tractors, loaders, or backhoes, which is based on the CalEEMod default equipment mix. The grading activities would generate 15 worker trips per day. In order to account for water truck emissions, six daily vendor truck trips were added to the grading phase. The mitigation of "water all exposed areas three times per day" was chosen in order to account for the fugitive dust reduction that would occur through adhering to SCAQMD Rule 403, which requires that the Best Available Control Measures be utilized to reduce fugitive dust emissions.

Building Construction

The building construction would occur after the completion of the grading phase and was modeled as occurring over 10 months, which is based on the CalEEMod default timing. The building construction phase would generate 79 worker trips and 29 vendor trips per day. The onsite equipment would consist of the simultaneous operation of one crane, three forklifts, one generator, one welder, and three of either tractors, loaders, or backhoes, which is based on the CalEEMod default equipment mix.

Paving

The paving phase would consist of paving the onsite roads and road improvements to Oliver Street and Brodiaea Avenue. The paving phase would occur after the completion of the building construction phase and was modeled as occurring over four weeks, which is based on the CalEEMod default timing. The paving phase would generate 15 worker trips per day. The onsite equipment would consist of the simultaneous operation of two pavers, two paving equipment, and two rollers, which is based on the CalEEMod default equipment mix.

Architectural Coating

The building construction would occur after the completion of the paving phase and was modeled as occurring over four weeks, which is based on the CalEEMod default timing. The architectural coating phase was modeled based on covering 268,637 square feet of residential interior area, 89,546 square feet of residential exterior area, and 7,841 square feet of parking area. The architectural coating phase would generate 16 worker trips per day. The onsite equipment would consist of one air compressor, which is based on the CalEEMod default equipment mix.

Operational Emissions Modeling

The operations-related criteria air pollutant emissions and GHG emissions created by the proposed project have been analyzed through use of the CalEEMod model. The proposed project was analyzed in the CalEEMod model based on the land use parameters provided above and the parameters entered for each operational emission source is described below.

Mobile Sources

Mobile sources include emissions the additional vehicle miles generated from the proposed project. The weekday daily vehicle trip rates associated with the proposed project have been set to match the 9.43 daily trips per home rate provided in the Project Scoping Form (EPD Solutions, Inc, 2021). Since the Project Scoping Form did not provide Saturday or Sunday daily trip rates for the proposed project, the default CalEEMod daily trip generation rates of: 9.54 per home on Saturdays; and 8.55 per home on Sundays were utilized. Since the proposed open space is a passive use that would not encourage people to drive to this open space, the trip generation rate for the open space park area was set to zero.

The CalEEMod model provides the selection of "mitigation" to account for project conditions that would result in less emissions than a project without these conditions, however it should be noted that this "mitigation" may represent current conditions, such as development that is in close proximity to an existing transit facility, where a project built at such location would create less vehicle trips and associated emissions than a project that was not built in close proximity to an existing transit facility. The mobile source emissions analysis for the project included the CalEEMod "mitigation" of "improved pedestrian network on project site and connecting offsite" and "increase transit accessibility" with the nearest transit is the existing Riverside Transit Bus Stop at the corner of Alessandro Boulevard and Oliver Street, 630 feet north of the project site.

Area Sources

Area sources include emissions from consumer products, landscape equipment, hearths and architectural coatings. The area source emissions were based on the on-going use of the proposed project in the CalEEMod model. According to the proposed project plans, no fireplaces or wood stoves would be installed into the proposed single-family homes. As such the number of woodstoves and fireplaces was set to zero. No other changes were made to the default area source parameters in the CalEEMod model.

Energy Usage

Energy usage includes emissions from electricity and natural gas used onsite. The energy usage was based on the ongoing use of the proposed 67 single-family homes in the CalEEMod Model. No changes were made to the default energy usage parameters in the CalEEMod model.

The 2019 Title 24, Part 6 building energy efficiency standards went into effect January 1, 2020 and have been developed so that the average new home built in California will have zero-net-energy use. In order to account for the new 2019 Title 24, Part 6 standards, this analysis included the CalEEMod mitigation of exceed the 2016 Title 24 standards by 7 percent, since according to 2019 Building Energy Efficiency Standards Frequently Asked Questions, prepared by CEC, 2018, the 2019 building standards have been calculated to result in new homes using about 7 percent less energy than homes built with the 2016 building standards. The 2019 Title 24 Part 6 standards also now require all single-family homes to install from: rooftop photovoltaic systems based on the following Equation 150.1-C https://www.energy.ca.gov/2018publications/CEC-400-2018-020/CEC-400-2018-020-CMF.pdf

Size of PV system $(kW_{PV}) = (CFA \times A)/1000 + (NDwell \times B)$

Where:

CFA = Conditioned floor area (99,830 square feet, based on 490 square foot garages)

NDwell = Number of dwelling units (67 homes)

A = CFA Adjustment factor (Climate Zone 10 = 0.627)

B = Dwelling Unit Adjustment factor (Climate Zone 10 = 1.41)

Based on the above formula, the proposed project would be required to install at least 157.1 kilowatts of photovoltaic solar panels. Since the CalEEMod model requires that the total kilowatt-hours per year generated by the solar panels be entered into the model, the 157.1 kilowatts of solar panels was multiplied by 8 hours, to provide a conservative average hours per day of sunlight that the solar panels will generate electricity and then divided by 1.2 to account for the loss associated with converting the direct current (DC) power from the solar panels to the alternating current (AC) power on the electrical grid and then multiplying by 365 days, which resulted in the proposed solar panels generating 382,188 kilowatt-hours per year that was entered into the CalEEMod model

Solid Waste

Waste includes the GHG emissions associated with the processing of waste from the proposed project as well as the GHG emissions from the waste once it is interred into a landfill. The analysis was based on the default CalEEMod waste generation rate of 79 tons of solid waste per year from the proposed project. No changes were made to the default solid waste parameters or mitigation measures in the CalEEMod model.

The CalEEMod mitigation of a 50 percent reduction in landfill waste was selected to account for implementation of AB 341 that provides strategies to reduce, recycle or compost solid waste by 75 percent by 2020. Only 50 percent was selected, since AB 341 builds upon the waste reduction measures of SB 939 and 1374 and therefore, it was assumed approximately 25 percent of the waste reduction target has already been accounted for in the CalEEMod model.

Water and Wastewater

Water includes the water used for the interior of the buildings as well as for landscaping and is based on the GHG emissions associated with the energy used to transport and filter the water. The analysis was based on the default CalEEMod water usage rate of 4,365,320 gallons per year of indoor water use and 3,419,320 gallons per year of outdoor water use. No changes were made to the default water and wastewater parameters in the CalEEMod model.

The CalEEMod mitigation of the use of low flow faucets, showers, and toilets and use of smart irrigation system controllers were selected to account for the implementation of the 2016 CCR Title 24 Part 11 (CalGreen) requirements.

8.2 Energy Use Calculations

The proposed project is anticipated to consume energy during both construction and operation of the proposed project and the parameters utilized to calculate energy use from construction and operation of the proposed project are detailed separately below.

Construction-Related Energy Use

Construction of the proposed project is anticipated to use energy in the forms of petroleum fuel for both off-road equipment as well as from the transport of workers and materials to and from the project site and the calculations for each source are described below.

Off-Road Construction Equipment

The off-road construction equipment fuel usage was calculated through use of the CalEEMod model's default off-road equipment assumptions detailed above in Section 8.1. For each piece of off-road equipment, the fuel usage was calculated through use of the *2017 Off-road Diesel Emission Factors* spreadsheet, prepared by CARB (https://ww3.arb.ca.gov/msei/ordiesel.htm). The Spreadsheet provides the following formula to calculate fuel usage from off-road equipment:

Fuel Used = Load Factor x Horsepower x Total Operational Hours x BSFC / Unit Conversion

Where:

Load Factor - Obtained from CalEEMod default values

Horsepower – Obtained from CalEEMod default values

Total Operational Hours – Calculated by multiplying CalEEMod default daily hours by CalEEMod default number of working days for each phase of construction

BSFC – Brake Specific Fuel Consumption (pounds per horsepower-hour) – If less than 100 Horsepower = 0.408, if greater than 100 Horsepower = 0.367

Unit Conversion – Converts pounds to gallons = 7.109

Table G shows the off-road construction equipment fuel calculations based on the above formula. Table G shows that the off-road equipment utilized during construction of the proposed project would consume 37,226 gallons of fuel.

Table G – Off-Road Equipment and Fuel Consumption from Construction of the Proposed Project

Equipment Type	Equipment Quantity	Horse- power	Load Factor	Operating Hours per Day	Total Operational Hours ¹	Fuel Used (gallons)
Site Preparation	· ,	-		• •		.,,
Rubber Tired Dozers	3	247	0.4	8	240	1,224
Tractors/Loaders/Backhoes	4	97	0.37	8	320	659
Grading						
Excavator	1	158	0.38	8	160	496
Grader	1	187	0.41	8	160	633
Rubber Tired Dozers	1	247	0.4	8	160	816
Tractors/Loaders/Backhoes	3	97	0.37	8	480	989
Building Construction						
Cranes	1	231	0.29	7	1,610	5,568
Forklifts	3	89	0.2	8	5,520	5,639
Generator Sets	1	84	0.74	8	1,840	6,564
Tractors/Loaders/Backhoes	3	97	0.37	7	4,830	9,949
Welders	1	46	0.45	8	1,840	2,186
Paving						
Pavers	2	130	0.42	8	320	902
Paving Equipment	2	132	0.36	8	320	785
Rollers	2	80	0.38	8	320	558
Architectural Coating						
Air Compressor	1	78	0.48	6	120	258
Total Off-Road Equipment Fuel Used during Construction (gallons)						37,226

Notes:

Source: CalEEMod Version 2020.4.0 (see Appendix A); CARB, 2017.

On-Road Construction-Related Vehicle Trips

The on-road construction-related vehicle trips fuel usage was calculated through use of the construction vehicle trip assumptions from the CalEEMod model run as detailed above in Section 8.1. The calculated total construction miles were then divided by the fleet average for the South Coast Air Basin miles per gallon rates for the year 2022 calculated through use of the EMFAC2017 model (https://www.arb.ca.gov/emfac/2017/) and the EMFAC2017 model printouts are shown in Appendix B. Table H shows the on-road construction vehicle trips modeled in CalEEMod and the fuel usage calculations.

¹ Based on: 10 days for Site Preparation, 20 days for Grading; 230 days for Building Construction; 20 days for Paving; and 20 days for Architectural Coating.

Table H – On-Road Vehicle Trips and Fuel Consumption from Construction of the Proposed Project

Vehicle Trip Types	Daily Trips	Trip Length (miles)	Total Miles per Day	Total Miles per Phase ¹	Fleet Average Miles per Gallon ²	Fuel Used (gallons)
Site Preparation						
Worker Trips	18	14.7	265	2,646	26.0	102
Vendor Truck Trips	6	6.9	41	414	8.2	50
Grading						
Worker Trips	15	14.7	221	4,410	26.0	170
Vendor Truck Trips	6	6.9	41	828	8.2	101
Building Construction	1					
Worker Trips	89	14.7	1,308	300,909	26.0	11,579
Vendor Truck Trips	33	6.9	228	52,371	8.2	6,367
Paving						
Worker Trips	15	14.7	221	4,410	26.0	170
Architectural Coating						
Worker Trips	18	14.7	265	5,292	26.0	204
	Total Fuel Used from On-Road Construction Vehicles (gallons)					18,742

Notes:

Source: CalEEMod Version 2020.4.0; CARB, 2018.

Table H shows that the on-road construction-related vehicle trips would consume 18,742 gallons of fuel and as detailed above, Table G shows that the off-road construction equipment would consume 37,226 gallons of fuel. This would result in the total consumption of 55,968 gallons of petroleum fuel from construction of the proposed project.

Operations-Related Energy Use

The operation of the proposed project is anticipated to use energy in the forms of petroleum fuel, electricity, and natural gas, and the calculations for each source are described below.

Operational Petroleum Fuel

The on-road operations-related vehicle trips fuel usage was calculated through use of the total annual vehicle miles traveled assumptions from the CalEEMod model run as detailed above in Section 8.1, which found that operation of the proposed project would generate 1,661,006 vehicle miles traveled per year. The calculated total operational miles were then divided by the South Coast Air Basin average rates of 26.0 miles per gallon, which was calculated through use of the EMFAC2017 model and based on year 2022. The EMFAC2017 model printouts are shown in Appendix B. Based on the above calculation methodology, the operation of the proposed project would consume 63,913 gallons per year.

Operational Electricity Use

The operations-related electricity usage was calculated in the CalEEMod model run that is detailed above in Section 8.1 that found the proposed project will use 150,507 kilowatt hours (kWh) per year with implementation of Title 24 Part 6 requirements that require the implementation of building energy

¹ Based on: 10 days for Site Preparation, 20 days for Grading; 230 days for Building Construction; 20 days for Paving; and 20 days for Architectural Coating

² From EMFAC 2017 model (see Appendix B). Worker Trips based on entire fleet of gasoline vehicles and Vendor Trips based on only truck fleet of diesel vehicles.

efficiency standards that include the installation of photovoltaic systems on the rooftops of the proposed homes.

Operational Natural Gas Use

The operations-related natural gas usage was calculated in the CalEEMod model run that is detailed above in Section 8.1 that found the proposed project will use 1,790,840 kilo British Thermal Units (kBTU) per year, which is equivalent to 1,791 mega-British Thermal units (MBTU) per year of natural gas.

9.0 THRESHOLDS OF SIGNIFICANCE

9.1 Regional Air Quality

Many air quality impacts that derive from dispersed mobile sources, which are the dominate pollution generators in the Air Basin, often occurs hours later and miles away after photochemical processes have converted primary exhaust pollutants into secondary contaminants such as ozone. The incremental regional air quality impact of an individual project is generally very small and difficult to measure. Therefore, SCAQMD has developed significance thresholds based on the volume of pollution emitted rather than on actual ambient air quality because the direct air quality impact of a project is not quantifiable on a regional scale. The SCAQMD CEQA Handbook states that any project in the Air Basin with daily emissions that exceed any of the identified significance thresholds should be considered as having an individually and cumulatively significant air quality impact. For the purposes to this air quality impact analysis, a regional air quality impact would be considered significant if emissions exceed the SCAQMD significance thresholds identified in Table I.

Table I – SCAQMD Regional Criteria Pollutant Emission Thresholds of Significance

		Pollutant Emissions (pounds/day)					
	VOC	NOx	СО	SOx	PM10	PM2.5	Lead
Construction	75	100	550	150	150	55	3
Operation	55	55	550	150	150	55	3

9.2 Local Air Quality

Project-related construction air emissions may have the potential to exceed the State and Federal air quality standards in the project vicinity, even though these pollutant emissions may not be significant enough to create a regional impact to the Air Basin. In order to assess local air quality impacts the SCAQMD has developed Localized Significant Thresholds (LSTs) to assess the project-related air emissions in the project vicinity. SCAQMD has also provided *Final Localized Significance Threshold Methodology* (LST Methodology), July 2008, which details the methodology to analyze local air emission impacts. The LST Methodology found that the primary emissions of concern are NO₂, CO, PM10, and PM2.5.

The LST Methodology provides Look-Up Tables with different thresholds based on the location and size of the project site and distance to the nearest sensitive receptors. As detailed above in Section 7.3, the project site is located in Monitoring Area 24, which covers the Perris and Moreno Valley areas. The Look-Up Tables provided in the LST Methodology include project site acreage sizes of 1-acre, 2-acres and 5-acres. The 5-acre project site values in the Look-Up Tables have been utilized in this analysis, since that is the nearest size available for the 8.8-acre project site. The nearest sensitive receptor to the project site is the church located adjacent to the north side, where the nearest structure is 65 feet (20 meters) north of the project site. According to LST Methodology, any receptor located closer than 25 meters (82 feet) shall be based on the 25-meter thresholds. Table J below shows the LSTs for NOx, CO, PM10 and PM2.5 for both construction and operational activities.

Table J – SCAQMD Local Air Quality Thresholds of Significance

	Allowable Emissions (pounds/day) ¹				
Activity	NOx	СО	PM10	PM2.5	
Construction	270	1,577	13	8	
Operation	270	1,577	4	2	

Notes:

9.3 Toxic Air Contaminants

According to the SCAQMD CEQA Handbook, any project that has the potential to expose the public to toxic air contaminants in excess of the following thresholds would be considered to have a significant air quality impact:

- If the Maximum Incremental Cancer Risk is 10 in one million or greater; or
- Toxic air contaminants from the proposed project would result in a Hazard Index increase of 1 or greater.

In order to determine if the proposed project may have a significant impact related to toxic air contaminants (TACs), the *Health Risk Assessment Guidance for analyzing Cancer Risks from Mobile Source Diesel Idling Emissions for CEQA Air Quality Analysis*, (Diesel Analysis) prepared by SCAQMD, August 2003, recommends that if the proposed project is anticipated to create TACs through stationary sources or regular operations of diesel trucks on the project site, then the proximity of the nearest receptors to the source of the TAC and the toxicity of the HAP should be analyzed through a comprehensive facility-wide health risk assessment (HRA).

9.4 Odor Impacts

The SCAQMD CEQA Handbook states that an odor impact would occur if the proposed project creates an odor nuisance pursuant to SCAQMD Rule 402, which states:

"A person shall not discharge from any source whatsoever such quantities of air contaminants or other material which cause injury, detriment, nuisance, or annoyance to any considerable number of persons to the public, or which endanger the comfort, repose, health or safety of any such persons or the public, or which cause, or have a natural tendency to cause, injury or damage to business or property.

The provisions of this rule shall not apply to odors emanating from agricultural operations necessary for the growing of crops or the raising of fowl or animals."

If the proposed project results in a violation of Rule 402 with regards to odor impacts, then the proposed project would create a significant odor impact.

9.5 Energy Conservation

The 2018 amendments and additions to the CEQA Checklist now include an Energy Section that analyzes the proposed project's energy consumption in order to avoid or reduce inefficient, wasteful or

¹ The nearest offsite sensitive receptor is a church located 65 feet (20 meters) north of the project site. According to SCAQMD methodology, all receptors closer than 25 meters are based on the 25 meter threshold.

Source: Calculated from SCAQMD's Mass Rate Look-up Tables for five acres in Air Monitoring Area 24, Perris Valley.

unnecessary consumption of energy. Appendix F of the 2020 CEQA Statute and Guidelines, states the following:

The goal of conserving energy implies the wise and efficient use of energy. The means of achieving this goal include:

- (1) Decreasing overall per capita energy consumption,
- (2) Decreasing reliance on fossil fuels such as coal, natural gas and oil, and
- (3) Increasing reliance on renewable energy sources.

Since the Energy Section was recently added, no state or local agencies have adopted specific criteria or thresholds to be utilized in an energy impact analysis. However, the 2018 *Guidelines for the Implementation of the California Environmental Quality Act,* provide the following direction on how to analyze a project's energy consumption:

"If analysis of the project's energy use reveals that the project may result in significant environmental effects due to wasteful, inefficient, or unnecessary use of energy, or wasteful use of energy resources, the EIR shall mitigate that energy use. This analysis should include the project's energy use for all project phases and components, including transportation-related energy, during construction and operation. In addition to building code compliance, other relevant considerations may include, among others, the project's size, location, orientation, equipment use and any renewable energy features that could be incorporated into the project. (Guidance on information that may be included in such an analysis is presented in Appendix F.) This analysis is subject to the rule of reason and shall focus on energy use that is caused by the project. This analysis may be included in related analyses of air quality, greenhouse gas emissions, transportation or utilities in the discretion of the lead agency."

If the proposed project creates inefficient, wasteful or unnecessary consumption of energy during construction or operation activities or conflicts with a state or local plan for renewable energy or energy efficiency, then the proposed project would create a significant energy impact.

9.6 Greenhouse Gas Emissions

The City of Moreno Valley has prepared the 2021 CAP that reflects the guidelines established in the 2017 Climate Change Scoping Plan (CARB, 2017) that was designed to implement the GHG emissions reduction targets set in Executive Order S-3-15 and Senate Bill 32 that recommend local governments target of 6.0 MTCO₂e per capita per year by 2030 and 2.0 MTCO₂e per year by 2050 in their CAPs. The 2021 CAP has adopted a proposed target of 4.0 MTCO₂e per capita per year by 2040, that was determined using a linear trajectory in emissions reduction between 2030 and 2050. Page 5-2 of the 2021 CAP states the following:

"For discretionary projects seeking to use CEQA streamlining provisions, in an environmental document the City shall refer to the required measures in this CAP as mandatory conditions of approval or as mitigation. This will enable project to benefit from CEQA streamlining provisions, while ensuring that the City can achieve the reduction targets outlined in this plan."

Therefore, the proposed project would be considered to create a significant cumulative GHG impact if the proposed project would exceed the 2021 CAP threshold of 4.0 MTCO₂e per capita threshold and does not

adopt the applicable measures in the 2021 CAP as conditions of approval that have been provided as Project Design Features above in Section 1.5.

The GHG emissions analysis for both construction and operation of the proposed project can be found below in Sections 10.8 and 10.9.

10.0 IMPACT ANALYSIS

10.1 CEQA Thresholds of Significance

Consistent with CEQA and the State CEQA Guidelines, a significant impact related to air quality, energy, and GHG emissions would occur if the proposed project is determined to:

- Conflict with or obstruct implementation of the applicable air quality plan;
- Result in a cumulatively considerable net increase of any criteria pollutant for which the project region is in non-attainment under an applicable federal or state ambient air quality standard;
- Expose sensitive receptors to substantial pollutant concentrations;
- Result in other emissions (such as those leading to odors) adversely affecting a substantial number of people;
- Result in potentially significant environmental impact due to wasteful, inefficient, or unnecessary consumption of energy resources, during project construction or operation;
- Conflict with or obstruct a state or local plan for renewable energy;
- Generate GHG emissions, either directly or indirectly, that may have a significant impact on the environment; or
- Conflict with any applicable plan, policy or regulation of an agency adopted for the purpose of reducing the emissions of GHGs.

10.2 Air Quality Compliance

The proposed project would not conflict with or obstruct implementation of the SCAQMD Air Quality Management Plan (AQMP). The following section discusses the proposed project's consistency with the SCAQMD AQMP.

SCAQMD Air Quality Management Plan

The California Environmental Quality Act (CEQA) requires a discussion of any inconsistencies between a proposed project and applicable General Plans and regional plans (CEQA Guidelines Section 15125). The regional plan that applies to the proposed project includes the SCAQMD AQMP. Therefore, this section discusses any potential inconsistencies of the proposed project with the AQMP.

The purpose of this discussion is to set forth the issues regarding consistency with the assumptions and objectives of the AQMP and discuss whether the proposed project would interfere with the region's ability to comply with Federal and State air quality standards. If the decision-makers determine that the proposed project is inconsistent, the lead agency may consider project modifications or inclusion of mitigation to eliminate the inconsistency.

The SCAQMD CEQA Handbook states that "New or amended GP Elements (including land use zoning and density amendments), Specific Plans, and significant projects must be analyzed for consistency with the AQMP." Strict consistency with all aspects of the plan is usually not required. A proposed project should be considered to be consistent with the AQMP if it furthers one or more policies and does not obstruct other policies. The SCAQMD CEQA Handbook identifies two key indicators of consistency:

- (1) Whether the project will result in an increase in the frequency or severity of existing air quality violations or cause or contribute to new violations, or delay timely attainment of air quality standards or the interim emission reductions specified in the AQMP.
- (2) Whether the project will exceed the assumptions in the AQMP or increments based on the year of project buildout and phase.

Both of these criteria are evaluated in the following sections.

<u>Criterion 1 - Increase in the Frequency or Severity of Violations?</u>

Based on the air quality modeling analysis contained in this report, short-term regional construction air emissions would not result in significant impacts based on SCAQMD regional thresholds of significance discussed above in Section 9.1 or local thresholds of significance discussed above in Section 9.2. The ongoing operation of the proposed project would generate air pollutant emissions that are inconsequential on a regional basis and would not result in significant impacts based on SCAQMD thresholds of significance discussed above in Section 9.1. The analysis for long-term local air quality impacts showed that local pollutant concentrations would not exceed the air quality standards. Therefore, a less than significant long-term impact would occur and no mitigation would be required.

Therefore, based on the information provided above, the proposed project would be consistent with the first criterion.

Criterion 2 - Exceed Assumptions in the AQMP?

Consistency with the AQMP assumptions is determined by performing an analysis of the proposed project with the assumptions in the AQMP. The emphasis of this criterion is to ensure that the analyses conducted for the proposed project are based on the same forecasts as the AQMP. The AQMP is developed through use of the planning forecasts provided in the Connect SoCal and 2019 FTIP. The Connect SoCal is a major planning document for the regional transportation and land use network within Southern California. The Connect SoCal is a long-range plan that is required by federal and state requirements placed on SCAG and is updated every four years. The 2019 FTIP provides long-range planning for future transportation improvement projects that are constructed with state and/or federal funds within Southern California. Local governments are required to use these plans as the basis of their plans for the purpose of consistency with applicable regional plans under CEQA. For this project, the City of Moreno Valley General Plan's Land Use Plan defines the assumptions that are represented in AQMP.

The project site is currently designated as Residential (R5) in the General Plan Land Use Plan and is zoned Residential (R5), which allows for a maximum of five dwelling units per acre. Since the proposed project would consist of developing 67 single-family homes on an 8.8-acre parcel, that would result in a density that would exceed five dwelling units per acre, the proposed project would require a General Plan Amendment to redesignate the project site to Downtown Center (DC). It should be noted that the property located on the west side of the project site is currently designated as Downtown Center (DC) land use, which allows for a mixed-use residential and commercial land uses. As such the proposed homes would be located in close proximity to the existing church to the north and potential future commercial uses to the west, which will promote a walkable community and would be in substantial compliance with the City's Land Use Element goals and policies. Therefore, the proposed project would not result in an inconsistency with the current land use designations with respect to the regional forecasts utilized by the AQMPs. As such, the proposed project is not anticipated to exceed the AQMP assumptions for the project site and is found to be consistent with the AQMP for the second criterion.

Based on the above, the proposed project will not result in an inconsistency with the SCAQMD AQMP. Therefore, a less than significant impact will occur in relation to implementation of the AQMP.

Level of Significance

Less than significant impact.

10.3 Cumulative Net Increase in Non-Attainment Pollution

The proposed project would not result in a cumulatively considerable net increase of any criteria pollutant for which the project region is non-attainment under an applicable Federal or State ambient air quality standard.

The SCAQMD has published a report on how to address cumulative impacts from air pollution: White Paper on Potential Control Strategies to Address Cumulative Impacts from Air Pollution (http://www.aqmd.gov/docs/default-source/Agendas/Environmental-Justice/cumulative-impacts-working-group/cumulative-impacts-white-paper.pdf). In this report the AQMD clearly states (Page D-3):

"...the AQMD uses the same significance thresholds for project specific and cumulative impacts for all environmental topics analyzed in an Environmental Assessment or Environmental Impact Report (EIR). The only case where the significance thresholds for project specific and cumulative impacts differ is the Hazard Index (HI) significance threshold for TAC emissions. The project specific (project increment) significance threshold is HI > 1.0 while the cumulative (facility- wide) is HI > 3.0. It should be noted that the HI is only one of three TAC emission significance thresholds considered (when applicable) in a CEQA analysis. The other two are the maximum individual cancer risk (MICR) and the cancer burden, both of which use the same significance thresholds (MICR of 10 in 1 million and cancer burden of 0.5) for project specific and cumulative impacts. Projects that exceed the project-specific significance thresholds are considered by the SCAQMD to be cumulatively considerable. This is the reason project-specific and cumulative significance thresholds are the same. Conversely, projects that do not exceed the project-specific thresholds are generally not considered to be cumulatively significant."

Therefore, this analysis assumes that individual projects that do not generate operational or construction emissions that exceed the SCAQMD's recommended daily thresholds for project- specific impacts would also not cause a cumulatively considerable increase in emissions for those pollutants for which the Basin is in nonattainment, and, therefore, would not be considered to have a significant, adverse air quality impact. Alternatively, individual project-related construction and operational emissions that exceed SCAQMD thresholds for project-specific impacts would be considered cumulatively considerable. The following section calculates the potential air emissions associated with the construction and operations of the proposed project and compares the emissions to the SCAQMD standards.

Construction Emissions

The construction activities for the proposed project are anticipated to include site preparation and grading of the 8.8 gross acre project site, building construction of the 67 single-family homes, paving of the onsite roads and road improvements to Oliver Street and Brodiaea Avenue and application of architectural coatings. The construction emissions have been analyzed for both regional and local air quality impacts.

Construction-Related Regional Impacts

The CalEEMod model has been utilized to calculate the construction-related regional emissions from the proposed project and the input parameters utilized in this analysis have been detailed in Section 8.1. The worst-case summer or winter daily construction-related criteria pollutant emissions from the proposed project for each phase of construction activities are shown below in Table K and the CalEEMod daily printouts are shown in Appendix A. Since it is possible that building construction, paving, and architectural coating activities may occur concurrently towards the end of the building construction phase, Table K also shows the combined regional criteria pollutant emissions from building construction (year 2023), paving and architectural coating phases of construction.

Table K – Construction-Related Regional Criteria Pollutant Emissions

		Pollu	tant Emissi	ons (pounds	/day)	
Activity	voc	NOx	СО	SO ₂	PM10	PM2.5
Site Preparation (Year 2022) ¹						
Onsite ²	3.17	33.08	19.70	0.04	9.28	5.42
Offsite ³	0.08	0.32	0.81	<0.00	0.24	0.07
Total	3.25	33.40	20.50	0.04	9.52	5.49
Grading (Year 2022) ¹						
Onsite ²	1.95	20.86	15.27	0.03	3.70	2.20
Offsite ³	0.07	0.31	0.69	<0.00	0.21	0.06
Total	2.02	21.16	15.96	0.03	3.91	2.26
Building Construction (Year 2022)						
Onsite	1.71	15.62	16.36	0.03	0.81	0.76
Offsite	0.40	1.71	4.03	0.02	1.23	0.35
Total	2.11	17.32	20.40	0.04	2.04	1.11
Combined Year 2023 Building Constructio	n, Paving, a	nd Archited	tural Coatin	ıgs		
Onsite	46.51	25.88	32.64	0.05	1.28	1.20
Offsite	0.48	1.43	4.92	0.02	1.59	0.44
Total	46.99	27.31	37.56	0.07	2.87	1.63
Maximum Daily Construction Emissions	46.99	33.40	37.56	0.07	9.52	5.49
SCQAMD Thresholds	75	100	550	150	150	55
Exceeds Threshold?	No	No	No	No	No	No

Notes:

Source: CalEEMod Version 2020.4.0.

Table K shows that none of the analyzed criteria pollutants would exceed the regional emissions thresholds during either site preparation, grading, or the combined building construction, paving and architectural coatings phases. Therefore, a less than significant regional air quality impact would occur from construction of the proposed project.

¹ Site Preparation and Grading based on adherence to fugitive dust suppression requirements from SCAQMD Rule 403.

² Onsite emissions from equipment not operated on public roads.

³ Offsite emissions from vehicles operating on public roads.

Construction-Related Local Impacts

Construction-related air emissions may have the potential to exceed the State and Federal air quality standards in the project vicinity, even though these pollutant emissions may not be significant enough to create a regional impact to the Air Basin.

The local air quality emissions from construction were analyzed through utilizing the methodology described in *Localized Significance Threshold Methodology* (LST Methodology), prepared by SCAQMD, revised October 2009. The LST Methodology found the primary criteria pollutant emissions of concern are NOx, CO, PM10, and PM2.5. In order to determine if any of these pollutants require a detailed analysis of the local air quality impacts, each phase of construction was screened using the SCAQMD's Mass Rate LST Look-up Tables. The Look-up Tables were developed by the SCAQMD in order to readily determine if the daily onsite emissions of CO, NOx, PM10, and PM2.5 from the proposed project could result in a significant impact to the local air quality.

Table L shows the onsite emissions from the CalEEMod model for the different construction phases and the calculated localized emissions thresholds that have been detailed above in Section 9.2. Since it is possible that building construction, paving, and architectural coating activities may occur concurrently towards the end of the building construction phase, Table L also shows the combined local criteria pollutant emissions from year 2023 building construction, paving and architectural coating phases of construction.

Table L – Construction-Related Local Criteria Pollutant Emissions

	Pollutant Emissions (pounds/day) ¹				
Construction Phase	NOx	co	PM10	PM2.5	
Site Preparation ²	33.12	19.80	9.31	5.43	
Grading ²	20.89	15.36	3.73	2.21	
Building Construction (Year 2022)	15.83	16.87	0.96	0.80	
Combined Building Construction (Year 2023), Paving and Architectural Coatings	27.33	33.41	1.59	1.36	
Maximum Daily Construction Emissions	33.12	33.41	9.31	5.43	
SCAQMD Local Construction Thresholds ³	270	1,577	13	8	
Exceeds Threshold?	No	No	No	No	

Notes:

The data provided in Table L shows that none of the analyzed criteria pollutants would exceed the local emissions thresholds during either site preparation, grading, or the combined building construction, paving, and architectural coatings phases. Therefore, a less than significant local air quality impact would occur from construction of the proposed project.

¹ The Pollutant Emissions include 100% of the On-Site emissions (off-road equipment and fugitive dust) and 1/8 of the Off-Site emissions (on road trucks and worker vehicles), in order to account for the on-road emissions that occur within a ¼ mile of the project site.

² Site Preparation and Grading phases based on adherence to fugitive dust suppression requirements from SCAQMD Rule 403.

³ The nearest offsite sensitive receptor to the project site is a church located 65 feet (20 meters) north of the project site. According to SCAQMD methodology, all receptors closer than 25 meters are based on the 25-meter threshold.

Source: Calculated from SCAQMD's Mass Rate Look-up Tables for five acres in Air Monitoring Area 24, Perris Valley

Operational Emissions

The on-going operation of the proposed project would result in a long-term increase in air quality emissions. This increase would be due to emissions from the project-generated vehicle trips, emissions from energy usage, onsite area source emissions, and off-road equipment created from the on-going use of the proposed project. The following section provides an analysis of potential long-term air quality impacts due to regional air quality and local air quality impacts with the on-going operations of the proposed project.

Operations-Related Regional Criteria Pollutant Analysis

The operations-related regional criteria air quality impacts created by the proposed project have been analyzed through use of the CalEEMod model and the input parameters utilized in this analysis have been detailed in Section 8.1. The worst-case summer or winter VOC, NOx, CO, SO₂, PM10, and PM2.5 daily emissions created from the proposed project's long-term operations have been calculated and are summarized below in Table M and the CalEEMod daily emissions printouts are shown in Appendix A.

	Pollutant Emissions (pounds/day)					
Activity	VOC	NOx	СО	SO ₂	PM10	PM2.5
Area Sources ¹	3.08	0.06	5.53	<0.00	0.31	0.31
Energy Usage ²	0.05	0.45	0.19	<0.00	0.04	0.04
Mobile Sources ³	1.81	2.28	15.91	0.04	3.62	0.98
Total Emissions	4.94	2.79	21.63	0.04	3.96	1.33
SCQAMD Operational Thresholds	55	55	550	150	150	55
Exceeds Threshold?	No	No	No	No	No	No

Table M – Operational Regional Criteria Pollutant Emissions

Notes:

Source: Calculated from CalEEMod Version 2020.4.0.

The data provided in Table M shows that none of the analyzed criteria pollutants would exceed the regional emissions thresholds. Therefore, a less than significant regional air quality impact would occur from operation of the proposed project.

Friant Ranch Case

The operations-related regional criteria air quality impacts In *Sierra Club v. County of Fresno* (2018) 6 Cal.5th 502 (also referred to as "Friant Ranch"), the California Supreme Court held that when an EIR concluded that when a project would have significant impacts to air quality impacts, an EIR should "make a reasonable effort to substantively connect a project's air quality impacts to likely health consequences." In order to determine compliance with this Case, the Court developed a multi-part test that includes the following:

1) The air quality discussion shall describe the specific health risks created from each criteria pollutant, including diesel particulate matter.

This Analysis details the specific health risks created from each criteria pollutant above in Section 4.1 and specifically in Table B. In addition, the specific health risks created from diesel particulate matter is

¹ Area sources consist of emissions from consumer products, architectural coatings, and landscaping equipment.

² Energy usage consist of emissions from natural gas usage.

³ Mobile sources consist of emissions from vehicles and road dust.

detailed above in Section 2.2 of this analysis. As such, this analysis meets the part 1 requirements of the Friant Ranch Case.

2) The analysis shall identify the magnitude of the health risks created from the Project. The Ruling details how to identify the magnitude of the health risks. Specifically, on page 24 of the ruling it states "The Court of Appeal identified several ways in which the EIR could have framed the analysis so as to adequately inform the public and decision makers of possible adverse health effects. The County could have, for example, identified the Project's impact on the days of nonattainment per year."

The Friant Ranch Case found that an EIR's air quality analysis must meaningfully connect the identified air quality impacts to the human health consequences of those impacts, or meaningfully explain why that analysis cannot be provided. As noted in the Brief of Amicus Curiae by the SCAQMD in the Friant Ranch case (https://www.courts.ca.gov/documents/9-s219783-ac-south-coast-air-quality-mgt-dist-041315.pdf) (Brief), SCAQMD has among the most sophisticated air quality modeling and health impact evaluation capability of any of the air districts in the State, and thus it is uniquely situated to express an opinion on how lead agencies should correlate air quality impacts with specific health outcomes. The SCAQMD discusses that it may be infeasible to quantify health risks caused by projects similar to the proposed Project, due to many factors. It is necessary to have data regarding the sources and types of air toxic contaminants, location of emission points, velocity of emissions, the meteorology and topography of the area, and the location of receptors (worker and residence). The Brief states that it may not be feasible to perform a health risk assessment for airborne toxics that will be emitted by a generic industrial building that was built on "speculation" (i.e., without knowing the future tenant(s)). Even where a health risk assessment can be prepared, however, the resulting maximum health risk value is only a calculation of risk, it does not necessarily mean anyone will contract cancer as a result of the Project. The Brief also cites the author of the CARB methodology, which reported that a PM2.5 methodology is not suited for small projects and may yield unreliable results. Similarly, SCAQMD staff does not currently know of a way to accurately quantify ozone-related health impacts caused by NOX or VOC emissions from relatively small projects, due to photochemistry and regional model limitations. The Brief concludes, with respect to the Friant Ranch EIR, that although it may have been technically possible to plug the data into a methodology, the results would not have been reliable or meaningful.

On the other hand, for extremely large regional projects (unlike the proposed project), the SCAQMD states that it has been able to correlate potential health outcomes for very large emissions sources – as part of their rulemaking activity, specifically 6,620 pounds per day of NOx and 89,180 pounds per day of VOC were expected to result in approximately 20 premature deaths per year and 89,947 school absences due to ozone. As shown above in Table K, project-related construction activities would generate a maximum of 46.99 pounds per day of VOC and 33.40 pounds per day of NOx and as shown above in Table M, operation of the proposed project would generate 4.94 pounds per day of VOC and 2.79 pounds per day NOx. The proposed project would not generate anywhere near these levels of 6,620 pounds per day of NOx or 89,190 pounds per day of VOC emissions. Therefore, the proposed project's emissions are not sufficiently high enough to use a regional modeling program to correlate health effects on a basin-wide level.

Notwithstanding, this analysis does evaluate the proposed project's localized impact to air quality for emissions of CO, NOX, PM10, and PM2.5 by comparing the proposed project's onsite emissions to the SCAQMD's applicable LST thresholds. As evaluated in this analysis, the proposed project would not result in emissions that exceeded the SCAQMD's LSTs. Therefore, the proposed project would not be expected

to exceed the most stringent applicable federal or state ambient air quality standards for emissions of CO, NOX, PM10, and PM2.5.

Operations-Related Local Air Quality Impacts

Project-related air emissions may have the potential to exceed the State and Federal air quality standards in the project vicinity, even though these pollutant emissions may not be significant enough to create a regional impact to the Air Basin. The proposed project has been analyzed for the potential local CO emission impacts from the project-generated vehicular trips and from the potential local air quality impacts from on-site operations. The following analyzes the vehicular CO emissions and local impacts from on-site operations.

Local CO Hotspot Impacts from Project-Generated Vehicular Trips

CO is the pollutant of major concern along roadways because the most notable source of CO is motor vehicles. For this reason, CO concentrations are usually indicative of the local air quality generated by a roadway network and are used as an indicator of potential local air quality impacts. Local air quality impacts can be assessed by comparing future without and with project CO levels to the State and Federal CO standards of 20 ppm over one hour or 9 ppm over eight hours.

At the time of the 1993 Handbook, the Air Basin was designated nonattainment under the CAAQS and NAAQS for CO. With the turnover of older vehicles, introduction of cleaner fuels, and implementation of control technology on industrial facilities, CO concentrations in the Air Basin and in the state have steadily declined. In 2007, the Air Basin was designated in attainment for CO under both the CAAQS and NAAQS. SCAQMD conducted a CO hot spot analysis for attainment at the busiest intersections in Los Angeles during the peak morning and afternoon periods and did not predict a violation of CO standards⁴. Since the nearby intersections to the proposed project are much smaller with less traffic than what was analyzed by the SCAQMD, no local CO Hotspot are anticipated to be created from the proposed project and no CO Hotspot modeling was performed. Therefore, a less than significant long-term air quality impact is anticipated to local air quality with the on-going use of the proposed project.

Local Criteria Pollutant Impacts from Onsite Operations

Project-related air emissions from onsite sources such as architectural coatings, landscaping equipment, and onsite usage of natural gas appliances may have the potential to create emissions areas that exceed the State and Federal air quality standards in the project vicinity, even though these pollutant emissions may not be significant enough to create a regional impact to the Air Basin.

The local air quality emissions from onsite operations were analyzed using the SCAQMD's Mass Rate LST Look-up Tables and the methodology described in LST Methodology. The Look-up Tables were developed by the SCAQMD in order to readily determine if the daily emissions of CO, NOx, PM10, and PM2.5 from the proposed project could result in a significant impact to the local air quality. Table N shows the onsite emissions from the CalEEMod model that includes area sources, energy usage, onsite off-road equipment,

⁴The four intersections analyzed by the SCAQMD were: Long Beach Boulevard and Imperial Highway; Wilshire Boulevard and Veteran Avenue; Sunset Boulevard and Highland Avenue; and La Cienega Boulevard and Century Boulevard. The busiest intersection evaluated (Wilshire and Veteran) had a daily traffic volume of approximately 100,000 vehicles per day with LOS E in the morning and LOS F in the evening peak hour.

and vehicles operating in the immediate vicinity of the project site and the calculated emissions thresholds.

Table N – Operations-Related Local Criteria Pollutant Emissions

	Pollutant Emissions (pounds/day)				
Onsite Emission Source	NOx	СО	PM10	PM2.5	
Area Sources	0.06	5.53	0.31	0.31	
Energy Usage	0.45	0.19	0.04	0.04	
Mobile Sources ¹	0.06	0.40	0.09	0.02	
Total Emissions	0.57	6.11	0.43	0.37	
SCAQMD Local Operational Thresholds ²	270	1,577	4	2	
Exceeds Threshold?	No	No	No	No	

Notes:

The data provided in Table N shows that the on-going operations of the proposed project would not exceed the local NOx, CO, PM10 and PM2.5 thresholds of significance discussed above in Section 9.2. Therefore, the on-going operations of the proposed project would create a less than significant operations-related impact to local air quality due to onsite emissions and no mitigation would be required.

Therefore, the proposed project would not result in a cumulatively considerable net increase of any criteria pollutant.

Level of Significance

Less than significant impact.

10.4 Sensitive Receptors

The proposed project would not expose sensitive receptors to substantial pollutant concentrations. The local concentrations of criteria pollutant emissions produced in the nearby vicinity of the proposed project, which may expose sensitive receptors to substantial concentrations have been calculated above in Section 10.3 for both construction and operations, which are discussed separately below. The discussion below also includes an analysis of the potential impacts from local criteria pollutant and toxic air contaminant emissions. The nearest sensitive receptor to the project site is a church located adjacent to the north side, where the nearest structure is 65 feet north of the project site. There is also a single-family home located as near as 85 feet to the south of the project site.

Construction-Related Sensitive Receptor Impacts

Construction activities may expose sensitive receptors to substantial pollutant concentrations of localized criteria pollutant concentrations and from toxic air contaminant emissions created from onsite construction equipment, which are described below.

³ Mobile sources based on 1/8 of the gross vehicular emissions, which is the estimated portion of vehicle emissions occurring within a quarter mile of the project site.

² The nearest sensitive receptor to the project site is a church located 65 feet (20 meters) north of the project site. According to SCAQMD methodology, all receptors closer than 25 meters are based on the 25-meter threshold.

Source: Calculated from SCAQMD's Mass Rate Look-up Tables for five acres in Air Monitoring Area 24, Perris Valley

Local Criteria Pollutant Impacts from Construction

The local air quality impacts from construction of the proposed project have been analyzed above in Section 10.3 and found that the construction of the proposed project would not exceed the local NOx, CO, PM10 and PM2.5 thresholds of significance discussed above in Section 9.2. Therefore, construction of the proposed project would create a less than significant construction-related impact to local air quality and no mitigation would be required.

Toxic Air Contaminants Impacts from Construction

The greatest potential for toxic air contaminant emissions would be related to diesel particulate matter (DPM) emissions associated with heavy equipment operations during construction of the proposed project. According to SCAQMD methodology, health effects from carcinogenic air toxics are usually described in terms of "individual cancer risk". "Individual Cancer Risk" is the likelihood that a person exposed to concentrations of toxic air contaminants over a 70-year lifetime will contract cancer, based on the use of standard risk-assessment methodology. It should be noted that the most current cancer risk assessment methodology recommends analyzing a 30 year exposure period for the nearby sensitive receptors (OEHHA, 2015).

Given the relatively limited number of heavy-duty construction equipment, the varying distances that construction equipment would operate to the nearby sensitive receptors, and the short-term construction schedule, the proposed project would not result in a long-term (i.e., 30 or 70 years) substantial source of toxic air contaminant emissions and corresponding individual cancer risk. In addition, California Code of Regulations Title 13, Article 4.8, Chapter 9, Section 2449 regulates emissions from off-road diesel equipment in California. This regulation limits idling of equipment to no more than five minutes, requires equipment operators to label each piece of equipment and provide annual reports to CARB of their fleet's usage and emissions. This regulation also requires systematic upgrading of the emission Tier level of each fleet, and currently no commercial operator is allowed to purchase Tier 0 or Tier 1 equipment and by January 2023 no commercial operator is allowed to purchase Tier 2 equipment. In addition to the purchase restrictions, equipment operators need to meet fleet average emissions targets that become more stringent each year between years 2014 and 2023. Therefore, due to the limitations in off-road construction equipment DPM emissions from implementation of Section 2448, a less than significant short-term toxic air contaminant impacts would occur during construction of the proposed project. As such, construction of the proposed project would result in a less than significant exposure of sensitive receptors to substantial pollutant concentrations.

Operations-Related Sensitive Receptor Impacts

The on-going operations of the proposed project may expose sensitive receptors to substantial pollutant concentrations of local CO emission impacts from the project-generated vehicular trips and from the potential local air quality impacts from onsite operations. The following analyzes the vehicular CO emissions. Local criteria pollutant impacts from onsite operations, and toxic air contaminant impacts.

Local CO Hotspot Impacts from Project-Generated Vehicle Trips

CO is the pollutant of major concern along roadways because the most notable source of CO is motor vehicles. For this reason, CO concentrations are usually indicative of the local air quality generated by a roadway network and are used as an indicator of potential impacts to sensitive receptors. The analysis provided above in Section 10.3 shows that no local CO Hotspots are anticipated to be created at any nearby intersections from the vehicle traffic generated by the proposed project. Therefore, operation of

the proposed project would result in a less than significant exposure of offsite sensitive receptors to substantial pollutant concentrations.

Local Criteria Pollutant Impacts from Onsite Operations

The local air quality impacts from the operation of the proposed project would occur from onsite sources such as architectural coatings, landscaping equipment, and onsite usage of natural gas appliances. The analysis provided above in Section 9.3 found that the operation of the proposed project would not exceed the local NOx, CO, PM10 and PM2.5 thresholds of significance discussed above in Section 9.2. Therefore, the on-going operations of the proposed project would create a less than significant operations-related impact to local air quality due to on-site emissions and no mitigation would be required.

Operations-Related Toxic Air Contaminant Impacts

Particulate matter (PM) from diesel exhaust is the predominant TAC in most areas and according to *The California Almanac of Emissions and Air Quality 2013 Edition*, prepared by CARB, about 80 percent of the outdoor TAC cancer risk is from diesel exhaust. Some chemicals in diesel exhaust, such as benzene and formaldehyde have been listed as carcinogens by State Proposition 65 and the Federal Hazardous Air Pollutants program. Due to the nominal number of diesel truck trips that are anticipated to be generated by the on-going operation of the proposed residential project, a less than significant TAC impact would occur during the on-going operations of the proposed project and no mitigation would be required.

Therefore, operation of the proposed project would result in a less than significant exposure of sensitive receptors to substantial pollutant concentrations.

Level of Significance

Less than significant impact.

10.5 Odor Emissions

The proposed project would not create objectionable odors affecting a substantial number of people. Individual responses to odors are highly variable and can result in a variety of effects. Generally, the impact of an odor results from a variety of factors such as frequency, duration, offensiveness, location, and sensory perception. The frequency is a measure of how often an individual is exposed to an odor in the ambient environment. The intensity refers to an individual's or group's perception of the odor strength or concentration. The duration of an odor refers to the elapsed time over which an odor is experienced. The offensiveness of the odor is the subjective rating of the pleasantness or unpleasantness of an odor. The location accounts for the type of area in which a potentially affected person lives, works, or visits; the type of activity in which he or she is engaged; and the sensitivity of the impacted receptor.

Sensory perception has four major components: detectability, intensity, character, and hedonic tone. The detection (or threshold) of an odor is based on a panel of responses to the odor. There are two types of thresholds: the odor detection threshold and the recognition threshold. The detection threshold is the lowest concentration of an odor that will elicit a response in a percentage of the people that live and work in the immediate vicinity of the project site and is typically presented as the mean (or 50 percent of the population). The recognition threshold is the minimum concentration that is recognized as having a characteristic odor quality, this is typically represented by recognition by 50 percent of the population. The intensity refers to the perceived strength of the odor. The odor character is what the substance smells like. The hedonic tone is a judgment of the pleasantness or unpleasantness of the odor. The hedonic

tone varies in subjective experience, frequency, odor character, odor intensity, and duration. Potential odor impacts have been analyzed separately for construction and operations below.

Construction-Related Odor Impacts

Potential sources that may emit odors during construction activities include the application of coatings such as asphalt pavement, paints and solvents and from emissions from diesel equipment. Standard construction requirements that limit the time of day when construction may occur as well as SCAQMD Rule 1108 that limits VOC content in asphalt and Rule 1113 that limits the VOC content in paints and solvents would minimize odor impacts from construction. As such, the objectionable odors that may be produced during the construction process would be temporary and would not likely be noticeable for extended periods of time beyond the project site's boundaries. Through compliance with the applicable regulations that reduce odors and due to the transitory nature of construction odors, a less than significant odor impact would occur and no mitigation would be required.

Operations-Related Odor Impacts

The proposed project would consist of a residential development. Potential sources that may emit odors during the on-going operations of the proposed project would primarily occur from the trash storage areas. Pursuant to City regulations, permanent trash enclosures that protect trash bins from rain as well as limit air circulation would be required for the trash storage areas. Due to the distance of the nearest receptors from the project site and through compliance with SCAQMD's Rule 402 and City trash storage regulations, no significant impact related to odors would occur during the on-going operations of the proposed project. Therefore, a less than significant odor impact would occur and no mitigation would be required.

Level of Significance

Less than significant impact

10.6 Energy Consumption

The proposed project would impact energy resources during construction and operation. Energy resources that would be potentially impacted include electricity, natural gas, and petroleum based fuel supplies and distribution systems. This analysis includes a discussion of the potential energy impacts of the proposed projects, with particular emphasis on avoiding or reducing inefficient, wasteful, and unnecessary consumption of energy. A general definition of each of these energy resources are provided below.

Electricity, a consumptive utility, is a man-made resource. The production of electricity requires the consumption or conversion of energy resources, including water, wind, oil, gas, coal, solar, geothermal, and nuclear resources, into energy. The delivery of electricity involves a number of system components, including substations and transformers that lower transmission line power (voltage) to a level appropriate for on-site distribution and use. The electricity generated is distributed through a network of transmission and distribution lines commonly called a power grid. Conveyance of electricity through transmission lines is typically responsive to market demands. In 2020, Moreno Valley Electric Utility, who provides electricity to the project vicinity provided 204 Gigawatt-hours per year of electricity⁵.

5 Obtained from: http://www.ecdms.energy.ca.gov/elecbyutil.aspx

Natural gas is a combustible mixture of simple hydrocarbon compounds (primarily methane) that is used as a fuel source. Natural gas consumed in California is obtained from naturally occurring reservoirs, mainly located outside the State, and delivered through high-pressure transmission pipelines. The natural gas transportation system is a nationwide network and, therefore, resource availability is typically not an issue. Natural gas satisfies almost one-third of the State's total energy requirements and is used in electricity generation, space heating, cooking, water heating, industrial processes, and as a transportation fuel. Natural gas is measured in terms of cubic feet. In 2020, Riverside County consumed 436.94 Million Therms of natural gas⁶.

Petroleum-based fuels currently account for a majority of the California's transportation energy sources and primarily consist of diesel and gasoline types of fuels. However, the state has been working on developing strategies to reduce petroleum use. Over the last decade California has implemented several policies, rules, and regulations to improve vehicle efficiency, increase the development and use of alternative fuels, reduce air pollutants and GHG emissions from the transportation sector, and reduce vehicle miles traveled (VMT). Accordingly, petroleum-based fuel consumption in California has declined. In 2017, 1,052 million gallons of gasoline and 148 million gallons of diesel was sold in Riverside County⁷.

The following section calculates the potential energy consumption associated with the construction and operations of the proposed project and provides a determination if any energy utilized by the proposed project is wasteful, inefficient, or unnecessary consumption of energy resources.

Construction Energy

The construction activities for the proposed project are anticipated to include site preparation and grading of the 8.8 gross acre project site, building construction of the 67 single-family homes, paving of the onsite roads and road improvements to Oliver Street and Brodiaea Avenue and application of architectural coatings. The proposed project would consume energy resources during construction in three (3) general forms:

- 1. Petroleum-based fuels used to power off-road construction vehicles and equipment on the project site, construction worker travel to and from the project site, as well as delivery and haul truck trips (e.g. hauling of material to disposal facilities);
- 2. Electricity associated with the conveyance of water that would be used during project construction for dust control (supply and conveyance) and electricity to power any necessary lighting during construction, electronic equipment, or other construction activities necessitating electrical power; and,
- 3. Energy used in the production of construction materials, such as asphalt, steel, concrete, pipes, and manufactured or processed materials such as lumber and glass.

Construction-Related Electricity

During construction the proposed project would consume electricity to construct the proposed warehouse and infrastructure. Electricity would be supplied to the project site by Moreno Valley Electric Utility and would be obtained from the existing electrical lines in the vicinity of the project site. The use of electricity from existing power lines rather than temporary diesel or gasoline powered generators would minimize impacts on fuel consumption. Electricity consumed during project construction would

6 Obtained from: http://www.ecdms.energy.ca.gov/gasbycounty.aspx

7 Obtained from: https://ww2.energy.ca.gov/almanac/transportation-data/gasoline/

vary throughout the construction period based on the construction activities being performed. Various construction activities include electricity associated with the conveyance of water that would be used during project construction for dust control (supply and conveyance) and electricity to power any necessary lighting during construction, electronic equipment, or other construction activities necessitating electrical power. Such electricity demand would be temporary, nominal, and would cease upon the completion of construction. Overall, construction activities associated with the proposed project would require limited electricity consumption that would not be expected to have an adverse impact on available electricity supplies and infrastructure. Therefore, the use of electricity during project construction would not be wasteful, inefficient, or unnecessary.

Since there are currently power lines in the vicinity of the project site, it is anticipated that only nominal improvements would be required to Moreno Valley Electric Utility distribution lines and equipment with development of the proposed project. Compliance with City's guidelines and requirements would ensure that the proposed project fulfills its responsibilities relative to infrastructure installation, coordinates any electrical infrastructure removals or relocations, and limits any impacts associated with construction of the project. Construction of the project's electrical infrastructure is not anticipated to adversely affect the electrical infrastructure serving the surrounding uses or utility system capacity.

Construction-Related Natural Gas

Construction of the proposed project typically would not involve the consumption of natural gas. Natural gas would not be supplied to support construction activities, thus there would be no demand generated by construction. Since there is currently natural gas service in the vicinity of the project site, construction of the proposed project would be limited to installation of new natural gas connections within the project site. Development of the proposed project would likely not require extensive infrastructure improvements to serve the project site. Construction-related energy usage impacts associated with the installation of natural gas connections are expected to be confined to trenching in order to place the lines below surface. In addition, prior to ground disturbance, the proposed project would notify and coordinate with SoCalGas to identify the locations and depth of all existing gas lines and avoid disruption of gas service. Therefore, construction-related impacts to natural gas supply and infrastructure would be less than significant.

Construction-Related Petroleum Fuel Use

Petroleum-based fuel usage represents the highest amount of transportation energy potentially consumed during construction, which would be utilized by both off-road equipment operating on the project site and on-road automobiles transporting workers to and from the project site and on-road trucks transporting equipment and supplies to the project site.

The off-road construction equipment fuel usage was calculated through use of the off-road equipment assumptions and fuel use assumptions shown above in Section 8.2, which found that the off-road equipment utilized during construction of the proposed project would consume 37,226 gallons of fuel. The on-road construction trips fuel usage was calculated through use of the construction vehicle trip assumptions and fuel use assumptions shown above in Section 8.2, which found that the on-road trips generated from construction of the proposed project would consume 18,742 gallons of fuel. As such, the combined fuel used from off-road construction equipment and on-road construction trips for the proposed project would result in the consumption of 55,968 gallons of petroleum fuel. This equates to 0.005 percent of the gasoline and diesel consumed annually in Riverside County. As such, the

construction-related petroleum use would be nominal, when compared to current county-wide petroleum usage rates.

Construction activities associated with the proposed project would be required to adhere to all State and SCAQMD regulations for off-road equipment and on-road trucks, which provide minimum fuel efficiency standards. As such, construction activities for the proposed project would not result in the wasteful, inefficient, and unnecessary consumption of energy resources. Impacts regarding transportation energy would be less than significant. Development of the project would not result in the need to manufacture construction materials or create new building material facilities specifically to supply the proposed project. It is difficult to measure the energy used in the production of construction materials such as asphalt, steel, and concrete, it is reasonable to assume that the production of building materials such as concrete, steel, etc., would employ all reasonable energy conservation practices in the interest of minimizing the cost of doing business.

Operational Energy

The ongoing operation of the proposed project would require the use of energy resources for multiple purposes including, but not limited to, heating/ventilating/air conditioning (HVAC), refrigeration, lighting, appliances, and electronics. Energy would also be consumed during operations related to water usage, solid waste disposal, landscape equipment and vehicle trips.

Operations-Related Electricity

Operation of the proposed project would result in consumption of electricity at the project site. As detailed above in Section 8.3 the proposed project would consume 150,507 kilowatt-hours per year of electricity. This equates to 0.07 percent of the electricity consumed annually by Moreno Valley Electric Utility. As such, the operations-related electricity use would be nominal, when compared to current electricity usage rates in the Moreno Valley Electric Utility service area.

It should be noted that the proposed project will be required to meet the 2019 Title 24, Part 6 building energy efficiency standards that have been developed to meet the State's goal of zero-net-energy use for new homes. The zero net energy use will be achieved through a variety of measures to make new homes more energy efficient and by also requiring installation of photovoltaic systems of adequate size to generate enough electricity to meet the zero-net energy use standard. The size of the PV system required for the project pursuant to the 2019 Title 24 standards was calculated above in Section 8.1, which found that the proposed project would need to install at least 157 Kilowatts of photovoltaic panels within the proposed project. Although, the CalEEMod model found that with implementation of the 2019 Title 24 Part 6 standards, that the proposed project would continue to utilize a nominal amount of power, it should be noted that the electricity usage and emission rates utilized by the CalEEMod model are based on regional average usage rates for existing homes, which were not all built to the most current Title 24 Part 6, standards, so the CalEEMod model provides a conservative or worst-case analysis of electricity use from the proposed project. Therefore, it is anticipated the proposed project will be designed and built to minimize electricity use and that existing and planned electricity capacity and electricity supplies would be sufficient to support the proposed project's electricity demand. Thus, impacts with regard to electrical supply and infrastructure capacity would be less than significant and no mitigation measures would be required.

Operations-Related Natural Gas

Operation of the proposed project would result in increased consumption of natural gas at the project site. As detailed above in Section 8.2 the proposed project would consume 1,791 MBTU per year of natural gas. This equates to 0.004 percent of the natural gas consumed annually in Riverside County. As such, the operations-related natural gas use would be nominal, when compared to current natural gas usage rates in the County.

It should be noted that, the proposed project would comply with all Federal, State, and City requirements related to the consumption of natural gas, that includes CCR Title 24, Part 6 *Building Energy Efficiency Standards* and CCR Title 24, Part 11: *California Green Building Standards*. The CCR Title 24, Part 6 and Part 11 standards require numerous energy efficiency measures to be incorporated into the proposed warehouse, including enhanced insulation as well as use of efficient natural gas appliances and HVAC units. Therefore, it is anticipated the proposed project will be designed and built to minimize natural gas use and that existing and planned natural gas capacity and natural gas supplies would be sufficient to support the proposed project's natural gas demand. Thus, impacts with regard to natural gas supply and infrastructure capacity would be less than significant and no mitigation measures would be required

Operations-Related Vehicular Petroleum Fuel Usage

Operation of the proposed project would result in increased consumption of petroleum-based fuels related to vehicular travel to and from the project site. As detailed above in Section 8.2 the proposed project would consume 63,913 gallons of petroleum fuel per year from vehicle travel. This equates to 0.005 percent of the gasoline and diesel consumed annually in Riverside County. As such, the operations-related petroleum use would be nominal, when compared to current county-wide petroleum usage rates. Therefore, it is anticipated the proposed project will be designed and built to minimize transportation energy and it is anticipated that existing and planned capacity and supplies of transportation fuels would be sufficient to support the proposed project's demand. Thus, impacts with regard transportation energy supply and infrastructure capacity would be less than significant and no mitigation measures would be required.

In conclusion, the proposed project would comply with regulatory compliance measures outlined by the State and County related to Air Quality, GHG Emissions, Transportation/Circulation, and Water Supply. Additionally, the proposed project would be constructed in accordance with all applicable City Building and Fire Codes. Therefore, the proposed project would not result in the wasteful, inefficient, or unnecessary consumption of energy resources during project construction or operation. Impacts would be less than significant.

Level of Significance

Less than significant impact.

10.7 Energy Plan Consistency

The proposed project would not conflict with or obstruct a state or local plan for renewable energy or energy efficiency. The applicable energy plan for the proposed project is the General Plan 2040 (City of Moreno Valley, 2021). The proposed project's consistency with the applicable energy-related policies in the General Plan 2040 are shown in Table O.

Table O - Proposed Project Compliance with Applicable General Plan Energy Policies

Policy No.	General Plan Policy	Proposed Project Implementation Actions
OSRC.3.1	Promote energy conservation throughout the community and encourage the use of renewable energy systems and technologies to supplement or replace traditional building energy systems.	Consistent. The proposed homes will be required to meet Title 24 Part 6 building standards that require all single-family homes built in California to install rooftop solar PV systems.
OSRC.3-5	Promote the retention and reuse of rainwater onsite and promote the use of rain barrels or other rainwater reuse systems throughout the community.	Consistent. The proposed project will include two water quality detention basin on the project site, that will capture rainwater and allow the rainwater to percolate into the groundwater basin for reuse.
OSRC.3-6	Encourage new development to incorporate as many water-wise practices as feasible in their design and construction.	Consistent. The proposed project is required to implement the Title 24 Part 11 CalGreen building standards that require the implementation of many water-wise practices that include the use of water-efficient appliances and low-flow faucets and shower heads.
OSRC.3-7	Conserve water through the provision of water-efficient infrastructure, drought tolerant plantings, and greywater usage to support public parks and landscaped areas.	Consistent. The proposed project is required to meet the requirements of Executive Order B-29-15 and the associated City's landscape plan requirements that requires all development to prepare a landscape plan that utilizes drought tolerant plants and water-efficient irrigation systems.
OSRC.3-8	Conserve water through the planting and maintenance of trees, which will provide for the capture of precipitation and runoff to recharge groundwater, in addition to providing shading for other landscaping to reduce irrigation requirements. Ensure that any 'community greening' projects utilize water-efficient landscape.	Consistent. The proposed project is required to meet the requirements of Executive Order B-29-15 and the associated City's landscape plan requirements that requires all development to prepare a landscape plan that utilizes drought tolerant plants and trees. In addition, the project will be graded to capture all runoff into the two onsite detention basins.

Source: City of Moreno Valley, 2021.

As shown in Table O, the proposed project would be consistent with all applicable energy-related policies from the General Plan. Therefore, the proposed project would not conflict with or obstruct a state or local plan for renewable energy or energy efficiency. Impacts would be less than significant.

Level of Significance

Less than significant impact.

10.8 Generation of Greenhouse Gas Emissions

The proposed project would not generate GHG emissions, either directly or indirectly, that may have a significant impact on the environment. The proposed project would result in the development of 67 single-family homes. The proposed project is anticipated to generate GHG emissions from area sources, energy usage, mobile sources, waste disposal, water usage, and construction equipment. The project's GHG emissions have been calculated with the CalEEMod model based on the construction and operational parameters detailed above in Section 8.1. A summary of the results is shown below in Table P and the CalEEMod model run is provided in Appendix C.

Table P - Project Related Greenhouse Gas Annual Emissions

	Greenhou	se Gas Emissions (Metric Tons per	Year)
Category	CO ₂	CH₄	N ₂ O	CO₂e
Area Sources ¹	1.13	<0.00	<0.00	1.16
Energy Usage ²	122.26	< 0.00	<0.00	122.96
Mobile Sources ³	559.49	0.03	0.03	568.79
Solid Waste ⁴	7.99	0.47	<0.00	19.81
Water and Wastewater ⁵	15.50	0.12	<0.00	19.22
Construction ⁶	16.30	< 0.00	<0.00	16.49
Total Emissions	722.67	0.62	0.03	748.43
Service Population ⁷				192
MTCO₂e per Service Population				3.9
City of Moreno Valley 2021 CAP Thresh	old of Significance (MT	CO₂e per capita pe	er year)	4.0
Exceeds Threshold?				No

Notes:

Source: CalEEMod Version 2020.4.0.

The data provided in Table P shows that the proposed project would create 748.43 MTCO₂e per year, which is equivalent to 3.9 MTCO₂e per year per service population. According to the threshold of significance provided in the 2021 CAP that is detailed above in Section 9.6, a cumulative global climate change impact would occur if the GHG emissions exceed 4.0 MTCO₂e per year per service population. Therefore, a less than significant generation of greenhouse gas emissions would occur from construction and operation of the proposed project.

Level of Significance

Less than significant impact.

10.9 Greenhouse Gas Plan Consistency

The proposed project would not conflict with any applicable plan, policy or regulation of an agency adopted for the purpose of reducing GHG emissions. The applicable plan for the proposed project is the 2021 CAP (City of Moreno Valley, 2021). As detailed above in Section 9.6, the proposed project would be consistent with the 2021 CAP if the GHG emissions created by the proposed project does not exceed the 2021 CAP threshold of 4.0 MTCO₂e per capita threshold and if the proposed project adopts the applicable measures in the 2021 CAP as conditions of approval. As shown above in Section 10.8, the proposed project would create 748.43 MTCO₂e per year, which is equivalent to 3.9 MTCO₂e per year per service population. Therefore, the proposed project is consistent with the 4.0 MTCO₂e per capita per year emissions target provided in the 2021 CAP.

The proposed project's consistency with the applicable measures in the 2021 CAP for a new single-family home development are shown in Table Q.

¹ Area sources consist of GHG emissions from consumer products, architectural coatings, and landscaping equipment.

² Energy usage consists of GHG emissions from electricity and natural gas usage.

³ Mobile sources consist of GHG emissions from vehicles.

⁴ Waste includes the CO₂ and CH₄ emissions created from the solid waste placed in landfills.

⁵ Water includes GHG emissions from electricity used for transport of water and processing of wastewater.

⁶ Construction emissions amortized over 30 years as recommended in the SCAQMD GHG Working Group on November 19, 2009.

⁷ Service population obtained from CalEEMod default population values.

Table Q - Proposed Project Compliance with Applicable 2021 CAP Policies

ID	General Plan Policy	Proposed Project Implementation Actions
TR-5	Implement trip reduction programs in new residential, commercial, and mixed-use developments.	Consistent. Project Design Feature 1 has been included in this analysis that requires the applicant to prepare a trip reduction program that would include preparing a packet that details nearby bus stops and bus routes, bike routes, and walkways, which shall be provided to everyone that purchases a home in this development.
R-2	Require new construction and major remodels to install interior real-time energy smart meters in line with current utility provider (e.g. MVU, SCE) efforts.	Consistent. Project Design Feature 2 has been included in this analysis that will require the applicant to install interior real-time energy smart meters into the proposed homes.
OR-1	Encourage residents and businesses to use efficient lawn and garden maintenance equipment or to reduce the need for landscape maintenance through native planting. o Partner with the SCAQMD to establish a voluntary exchange program for residential electric lawnmowers and backpack-style leaf blowers. o Require new buildings to provide electrical outlets in an accessible location to facilitate use of electric-powered lawn and garden equipment. o In project review, encourage the replacement of high-maintenance landscapes (like grass turf) with native vegetation to reduce the need for gas-powered lawn and garden equipment.	Consistent. The proposed project is required to implement the Title 24 Part 11 CalGreen building standards that require that the homes include electrical outlets on the exterior of the proposed homes to allow for plug-in electrical landscaping
OR-2	Reduce emissions from heavy-duty construction equipment by limiting idling based on South Coast Air Quality Management District (SCAQMD) requirements and utilizing cleaner fuels, equipment, and vehicles. o Require provision of clear signage reminding construction workers to limit idling. o Require project applicants to limit GHG emissions through one or more of the following measures: substitute electrified or hybrid equipment for diesel/ gas powered, use alternative-fueled equipment on site, avoid use of on-site generators.	Consistent. Project Design Feature 3 has been included in this analysis that will require the applicant to install signage to remind construction workers to limit idling and to encourage the use of alternative powered vehicles and equipment.
	Require new landscaping to be climate appropriate.	Consistent. The proposed project is required to meet the requirements of Executive Order B-29-15 and the associated City's landscape plan requirements that requires all development to prepare a landscape plan that utilizes drought tolerant plants and water-efficient irrigation systems.
	Encourage residents and businesses to use efficient lawn and garden maintenance through native planting City of Moreno Valley, 2021.	Consistent. The proposed project is required to meet the requirements of Executive Order B-29-15 and the associated City's landscape plan requirements that requires all development to prepare a landscape plan that utilizes native planting

As shown in Table Q, with implementation of Project Design Features 1, 2 and 3 that are provided above in Section 1.5, the proposed project would be consistent with all applicable 2021 CAP policies for a single-family residential development. Therefore, the proposed project would not conflict with any applicable plan, policy or regulation of an agency adopted for the purpose of reducing the emissions of greenhouse gases.

Level of Significance

Less than significant impact.

11.0 REFERENCES

Breeze Software, California Emissions Estimator Model (CalEEMod) version 2020.4.0.

California Air Resources Board, 2017 Off-Road Diesel Emission Factor Update for NOx and PM, 2017.

California Air Resources Board, Appendix VII Risk Characterization Scenarios, October 2000.

California Air Resources Board, California's 2017 Climate Change Scoping Plan, November 2017.

California Air Resources Board, First Update to the Climate Change Scoping Plan, May 2014.

California Air Resources Board, Resolution 08-43, December 12, 2008.

California Air Resources Board, *Recommended Approaches for Setting Interim Significance Thresholds for Greenhouse Gases under the California Environmental Quality Act*, on October 24, 2008.

California Air Resources Board, Final Staff Report Proposed Update to the SB 375 Greenhouse Gas Emission Reduction Targets, October 2017.

California Air Resources Board, The California Almanac of Emissions and Air Quality 2013 Edition.

California Department of Conservation, A General Guide for Ultramafic Rocks in California – Areas More Likely to Contain Naturally Occurring Asbestos, August, 2000.

California Energy Commission, 2019 Building Energy Efficiency Standards Frequently Asked Questions, 2018.

City of Moreno Valley, City of Moreno Valley General Plan 2040, adopted June 15, 2021.

City of Moreno Valley, City of Moreno Valley Climate Action Plan, adopted June 15, 2021.

EPD Solutions, Inc., City of Moreno Valley Traffic Impact Preparation Guide Project Scoping Form, October, 2021.

Environmental Protection Agency, Nonattainment Major New Source Review Implementation Under 8-Hour Ozone National Ambient Air Quality Standard: Reconsideration, June 30, 2005.

Environmental Protection Agency, *Inventory of U.S. Greenhouse Gas Emissions and Sinks 1990-2018*, April 13, 2020.

International Code Council, Guide to the 2016 California Green Building Standards Code Nonresidential, January 2017.

Office of Environmental Health Hazard Assessment (OEHHA), Air Toxics Hot Spots Program Risk Assessment Guidelines Guidance Manual for Preparation of Health Risk Assessments, February 2015

South Coast Air Quality Management District, 2007 Air Quality Management Plan, June 1, 2007.

South Coast Air Quality Management District, *Appendix A Calculation Details for CalEEMod*, February 2011.

South Coast Air Quality Management District, CEQA Air Quality Handbook, April 1993.

South Coast Air Quality Management District, Final 2012 Air Quality Management Plan, December, 2012.

South Coast Air Quality Management District, Final 2016 Air Quality Management Plan, March, 2017.

South Coast Air Quality Management District, *Final Localized Significance Threshold Methodology*, Revised July 2008.

South Coast Air Quality Management District, Revised Draft – 2012 Lead State Implementation Plan Los Angeles County, May 4, 2012.

South Coast Air Quality Management District, Rule 402 Nuisance, Adopted May 7, 1976.

South Coast Air Quality Management District, Rule 403 Fugitive Dust, Amended June 3, 2005.

South Coast Air Quality Management District, Rule 1108 Cutback Asphalt, Amended February 1, 1985.

South Coast Air Quality Management District, *Rule 1108.1 Emulsified Asphalt*, Amended November 4, 1983.

South Coast Air Quality Management District, *Rule 1113 Architectural Coatings,* Amended September 6, 2013.

South Coast Air Quality Management District, Rule 1143 Consumer Paint Thinners & Multi-Purpose Solvents, Amended December 3, 2010.

South Coast Air Quality Management District, SCAQMD Air Quality Significance Thresholds, March 2015.

South Coast Air Quality Management District, *Draft Report Multiple Air Toxics Exposure Study in the South Coast Air Basin, MATES III*, January 2008.

South Coast Air Quality Management District, *Draft Report Multiple Air Toxics Exposure Study in the South Coast Air Basin, MATES-IV*, October 2014.

Southern California Association of Governments, 2020-2045 Regional Transportation Plan/Sustainable Communities Strategy (Connect SoCal), September 3, 2020.

Southern California Association of Governments, 2019 Federal Transportation Improvement Program (FTIP) Guidelines, September 2018.

University of California, Davis, Transportation Project-Level Carbon Monoxide Protocol, December 1997.

U.S. Geological Survey, *Reported Historic Asbestos Mines, Historic Asbestos Prospects, and Other Natural Occurrences of Asbestos in California*, 2011.

APPENDIX A

CalEEMod Model Daily Printouts

Page 1 of 26

Date: 10/22/2021 7:50 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

TTM No. 38237 Discovery Residential

Riverside-South Coast County, Summer

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Other Asphalt Surfaces	3.00	Acre	3.00		0
City Park		Acre	0.56	24,393.60	0
Single Family Housing	67.00	Dwelling Unit 5.24 132,660.00	5.24	132,660.00	192

1.2 Other Project Characteristics

Urbanization	Urban	Wind Speed (m/s)	2.4	Precipitation Freq (Days)	28
Climate Zone	10			Operational Year	2024

Utility Company Southern California Edison

CH4 Intensity 0.033 N2O Intensity 0.004 (lb/MWhr) (lb/MWhr)	
390.98	
CO2 Intensity (Ib/MWhr)	

1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - Total Project Site = 8.8 acres

Construction Phase -

Trips and VMT - 6 vendor trips per day added to Site Preparation and Grading phases to account for water truck emissions

Vehicle Trips - Weekday trip rate set to match Traffic Scoping Agreement

Woodstoves - No Woodstoves or fireplaces.

Construction Off-road Equipment Mitigation - Water Exposed Area 3x per day selected to account for SCAQMD Rule 403 minimum requirements

Mobile Land Use Mitigation - Improve Pedestrian Network onsite and connecting offsite. Distance to nearest bus stop 0.12 mile.

Area Mitigation -

Energy Mitigation - Exceed Title 24 by 7% selected to account for 2019 Title 24. 382,188 kWh generated per year from PV panels

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Water Mitigation - Install low-flow fixtures and use water-efficient irrigation selected to account for Title 24 Part 11 min requirements

Waste Mitigation - 50% reduction in waste selected to account for AB 341

New Value	00.0	67.00	0.00	132,660.00	5.24	6.00	6.00	0.00	0.00	0.00	9.43	0.00	0.00
Default Value	56.95	6.70	3.35	120,600.00	21.75	0.00	0.00	1.96	2.19	0.78	9.44	3.35	3.35
Column Name	NumberGas	NumberNoFireplace	NumberWood	LandUseSquareFeet	LotAcreage	VendorTripNumber	VendorTripNumber	ST_TR	SU_TR	WD_TR	WD_TR	NumberCatalytic	NumberNoncatalytic
Table Name	tblFireplaces	tblFireplaces	tblFireplaces	tblLandUse	tblLandUse	tblTripsAndVMT	tblTripsAndVMT	tbIVehicleTrips	tbIVehicleTrips	tbIVehicleTrips	tbIVehicleTrips	tblWoodstoves	tblWoodstoves

2.0 Emissions Summary

Page 3 of 26

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Date: 10/22/2021 7:50 AM

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	XON	00	S02	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	PM2.5 Bio- CO2 NBio- CO2 Total CO2 Total	CH4	NZO	CO2e
Year					lb/day	day							lb/day	lay		
2022	3.2508	3.2508 33.3832 20.5036 0.0420 19.8966	20.5036	0.0420	(C)	1.6172	21.5139	10.1669	1.4880	1.6172 21.5139 10.1669 1.4880 11.6549 0.0000 4,110.903 4,110.903 1.1980 0.1170 4,161.819	0.0000	4,110.903 0	4,110.903 0	1.1980	0.1170	4,161.819 6
2023	43.5790	43.5790 15.6640 19.9530 0.0415 1.2062	19.9530	0.0415		0.7138	1.9200	0.3247	1.9200 0.3247 0.6717	0.9964	0.0000	4,062.124 9	0.0000 4,062.124 4,062.124 0.7174 0.1112 4,111.133 9 9	0.7174	0.1112	4,111.133
Maximum	43.5790	43.5790 33.3832 20.5036 0.0420 19.8966	20.5036	0.0420			21.5139	10.1669	1.4880	1.6172 21.5139 10.1669 1.4880 11.6549 0.0000 4,110.903 4,110.903 1.1980 0.1170 4,161.819	0.0000	4,110.903	4,110.903 0	1.1980	0.1170	4,161.819 6

Mitigated Construction

CO2e		.161.819 6	.111.133 2	,161.819 6
NZO		0.0000 4,110.903 4,110.903 1.1980 0.1170 4,161.819 0 0 6	0.0000 4,062.124 4,062.124 0.7174 0.1112 4,111.133 9 9	1.4880 5.4924 0.0000 4,110.903 4,110.903 1.1980 0.1170 4,161.819 0 0
CH4	Уk	1.1980	0.7174	1.1980
Total CO2	lb/day	4,110.903 0	4,062.124 9	4,110.903 0
Bio- CO2 NBio- CO2 Total CO2 CH4		4,110.903 0	4,062.124 9	4,110.903 0
Bio- CO2		0.0000		0.000.0
PM2.5 Total		5.4924	0.9964	5.4924
Exhaust PM2.5		1.6172 9.5231 4.0044 1.4880 5.4924	0.6717	1.4880
Fugitive PM2.5		4.0044	0.3247 0.6717	1.6172 9.5231 4.0044
PM10 Total		9.5231	1.9200	9.5231
Exhaust PM10	lb/day	1.6172	0.7138	1.6172
Fugitive PM10	/qI	7.9059	1.2062	7.9059
SO2		0.0420	0.0415	0.0420
00		20.5036	19.9530	20.5036
NOx		3.2508 33.3832 20.5036 0.0420 7.9059	43.5790 15.6640 19.9530 0.0415	43.5790 33.3832 20.5036 0.0420 7.9059
ROG		3.2508	43.5790	43.5790
	Year	2022	2023	Maximum

Date: 10/22/2021 7:50 AM Page 4 of 26 CalEEMod Version: CalEEMod.2020.4.0

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

ø.	
CO2e	0.00
N20	0.00
СН4	00:0
Total CO2	0.00
Bio- CO2 NBio-CO2 Total CO2	00'0
Bio- CO2	0.00
PM2.5 Total	48.71
Exhaust PM2.5	0.00
Fugitive PM2.5	58.74
PM10 Total	51.17
Exhaust PM10	00'0
Fugitive PM10	56.82
805	00'0
00	00'0
XON	00'0
ROG	0.00
	Percent Reduction

Page 5 of 26 CalEEMod Version: CalEEMod.2020.4.0

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

Date: 10/22/2021 7:50 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Unmitigated Operational

CO2e		10.1926	614.5004	4,757.485 4	5,382.178 4
N20		9.9538 9.5500e- 0.0000 10.1926 003	0.0112	0.2110	0.2222
CH4	lay	9.5500e- 003	0.0117	0.2202	0.2415
Total CO2	lb/day	9.9538	610.8703 610.8703	4,689.109 4,689.109 7	5,309.933 8
Bio- CO2 NBio- CO2 Total CO2		0.0000 9.9538	610.8703	4,689.109 7	0.0000 5,309.933 5,309.933 8 8
Bio- CO2		0.0000	, , , , , , ,		0.0000
PM2.5 Total		0.0306	0.0387	1.2636	1.3329
Exhaust PM2.5		0.0306	0.0387	0.0324	0.1017
Fugitive PM2.5				1.2312	1.2312
PM10 Total		0.0306 0.0306	0.0387	4.6495	4.7188
Exhaust PM10	lb/day	0.0306	0.0387	0.0346	0.1039
Fugitive PM10)/q			4.6149	4.6149
S02		2.9000e- 004	3.0500e- 003	0.0453	0.0486
00		5.5256	0.2036	19.5803	25.3095
NOX		3.0778 0.0637 5.5256 2.9000e-	0.4785	2.6014	3.1435
ROG		3.0778	0.0560	1.9907	5.1245
	Category	Area	Energy	Mobile	Total

Mitigated Operational

		_			
CO2e		10.1926	580.6550	3,731.777 3	4,322.624 9
N20		0.0000 10.1926	0.0106	0.1730	0.1836
CH4	ay	9.5500e- 003	0.0111	0.1860	0.2066
Total CO2	lb/day	9.9538	577.2248	3,675.576 0	4,262.754 6
NBio- CO2 Total CO2		9.9538	577.2248 577.2248	3,675.576 3,675.576 0	0.0000 4,262.754 4,262.754 6
Bio- CO2		0.0000	 		0.0000
PM2.5 Total		90:030	0.0366	0.9841	1.0513
Exhaust PM2.5		0.0306	0.0366	0.0257	0.0929
Fugitive PM2.5				0.9584	0.9584
PM10 Total		90:000	0.0366	3.6198	3.6870
Exhaust PM10	ı/day	0.0306	0.0366	0.0275	0.0947
Fugitive PM10	p/qı		r 	3.5923	3.5923
SO2		2.9000e- 004	2.8900e- 003	0.0355	0.0387
00		5.5256	0.1924	15.9147	21.6327
×ON		0.0637	0.452	2.1454	4.9375 2.6613
ROG		3.0778	0.0529	1.8068	4.9375
	Category	Area	Energy	Mobile	Total

Page 6 of 26

Date: 10/22/2021 7:50 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

ROG	NOX	00	802	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	Bio- CO2 NBio-CO2 Total CO2	Total CO2	CH4	N20	CO2e
3.65	15.34	14.53	20.46	22.16	8.90	21.87	22.16	8.66	21.13	0.00	19.72	19.72	14.46	17.37	19.69

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	oaration saration	Site Preparation		11/18/2022	5	10	
2	Grading		11/20/2022	12/16/2022			
က	Construction	Construction	ŀ	11/3/2023	5		
4	Paving		11/4/2023	12/1/2023		20	
5	ral Coating	tural Coating		12/29/2023	5	20	

Acres of Grading (Site Preparation Phase): 15

Acres of Grading (Grading Phase): 20

Acres of Paving: 3

Residential Indoor: 268,637; Residential Outdoor: 89,546; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 7,841 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
ation	Rubber Tired Dozers	8	8.00		0.40
Site Preparation	Tractors/Loaders/Backhoes	4	8.00		0.37
Grading	Excavators	-	8.00		0.38
Grading	Graders	-	8.00		0.41
Grading		1	~		0.40
Grading	Tractors/Loaders/Backhoes	3	8.00	97	0.37

Page 7 of 26

Date: 10/22/2021 7:50 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

EMFAC Off.	EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied	t Duty Vehic	le to Account	for the SAFE Vel	nicle Rule Applied
Building Construction	Cranes		2.00	231	0.29
Building Construction	Forklifts	က	8.00	68	0.20
Building Construction	Generator Sets		8.00	84	0.74
Building Construction	Tractors/Loaders/Backhoes	e e	7.00	97	0.37
Building Construction	Welders	-	8.00	46	0.45
Paving	Pavers	2	8.00	130	0.42
Paving	Paving Equipment	2	8.00	132	0.36
Paving	Rollers	2	8.00	80	0.38
Architectural Coating	Air Compressors		6.00	78	0.48

Trips and VMT

Phase Name	Offroad Equipment Worker Trip Count Number	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Vendor Hauling Vehicle Class
Site Preparation	2	18.00	00.9	00.0		9:06	20.00		HDT_Mix	HHDT
Grading	9	15.00	00.9	0.00		6.90			į	HHDT
Building Construction	6	89.00	33.00	0.00	14.70	06.9			HDT_Mix	HHDT
Paving	9	15.00	00.0	0.00	_	06.9		D_Mix	HDT_Mix	HHDT
Architectural Coating	1	18.00	00.00	0.00	14.70	6.90		-D_Mix	HDT_Mix	ННОТ

3.1 Mitigation Measures Construction

Water Exposed Area

Page 8 of 26 CalEEMod Version: CalEEMod.2020.4.0

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

Date: 10/22/2021 7:50 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Site Preparation - 2022

Unmitigated Construction On-Site

CO2e		0.0000	3,715.865 5	3,715.865 5
N20				
CH4	lay		1.1922	1.1922
Total CO2	lb/day	0.0000	3,686.061 9	3,686.061 3,686.061 9
Bio- CO2 NBio- CO2 Total CO2			3,686.061 3,686.061 1.1922 9 9	3,686.061 9
Bio- CO2				
PM2.5 Total		10.1025	1.4836	11.5860
Exhaust PM2.5		0.0000 19.6570 10.1025 0.0000 10.1025	1.4836 1.4836	1.4836
Fugitive PM2.5		10.1025		10.1025
PM10 Total		19.6570	1.6126 1.6126	21.2696
Exhaust PM10	day	0.0000	1.6126	1.6126
Fugitive PM10	lb/day	19.6570		0.0380 19.6570
S02			0.0380	0.0380
00			19.6978	19.6978
NOx			33.0835	3.1701 33.0835 19.6978
ROG			3.1701 33.0835 19.6978 0.0380	3.1701
	Category		Off-Road	Total

Unmitigated Construction Off-Site

		_			
CO2e		0.0000	120.9138	187.5158	308.4296
N2O		0.000.0	0.0172	4.5800e- 003	0.0218
CH4	lay	0.000.0	1.2300e- 003	4.6100e- 003	5.8400e- 003
Total CO2	lb/day	0.0000 0.0000 0.0000 0.0000	115.7672 115.7672 1.2300e- 003	186.0370 186.0370	301.8042
Bio- CO2 NBio- CO2 Total CO2		0.0000	115.7672	186.0370	301.8042
Bio- CO2					
PM2.5 Total		0.0000	0.0146	0.0543	0.0689
Exhaust PM2.5		0.0000	3.5000e- 003	9.2000e- 004	4.4200e- 003
Fugitive PM2.5		0.0000 0.0000 0.0000 0.0000	0.0111	0.0534	0.0644
PM10 Total		0.000.0	0.0421	0.2022	0.2443
Exhaust PM10	b/day		3.6600e- 003	1.0000e- 003	4.6600e- 003
Fugitive PM10)/qI		0.0384	0.2012	0.2396
SO2		0.0000	.0900e- 003	0.7176 1.8300e- (2.9200e- 003
00		0.000.0	0.0882	0.7176	8508.0
×ON		0.0000 0.0000 0.0000 0.0000	0.2537	0.0460	0.2997
ROG		0.0000	9.7600e- 0.2537 003	0.0709	0.0807
	Category	Hauling	Vendor	Worker	Total

Page 9 of 26 CalEEMod Version: CalEEMod.2020.4.0

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

Date: 10/22/2021 7:50 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Mitigated Construction On-Site 3.2 Site Preparation - 2022

C02e		0.0000	3,715.865 5	3,715.865 5
N20				,
CH4	ay		1.1922	1.1922
Total CO2	lb/day	0.000.0	3,686.061 9	
Bio- CO2 NBio- CO2 Total CO2			0.0000 3,686.061 3,686.061 1.1922 9 9	0.0000 3,686.061 3,686.061 9 9
Bio- CO2			0.000	0.000.0
PM2.5 Total		3.9400	1.4836	5.4235
Exhaust PM2.5		0.000.0	1.4836	1.4836
Fugitive PM2.5		3.9400 0.0000	 	3.9400
PM10 Total			1.6126	9.2788
Exhaust PM10	lay	0.0000	1.6126	1.6126
Fugitive PM10	lb/day	7.6662		7.6662
S02			0.0380	0.0380 7.6662
00			19.6978	19.6978
XON			3.1701 33.0835 19.6978 0.0380	33.0835 19.6978
ROG			3.1701	3.1701
	Category	Fugitive Dust	Off-Road	Total

Mitigated Construction Off-Site

CO2e		0.0000	120.9138	187.5158	308.4296
NZO		0.0000	0.0172	4.5800e- 003	0.0218
CH4	lay	0.000.0	1.2300e- 003	4.6100e- 003	5.8400e- 003
Total CO2	lb/day	0.0000 0.0000 0.0000 0.0000	115.7672 115.7672 1.2300e- 003	186.0370 186.0370	301.8042
Bio- CO2 NBio- CO2 Total CO2		0.0000	115.7672	186.0370	301.8042
Bio- CO2			1 1 1 1 1		
PM2.5 Total		0.0000	0.0146	0.0543	0.0689
Exhaust PM2.5		0.0000	3.5000e- 003	9.2000e- 004	4.4200e- 003
Fugitive PM2.5		0.0000 0.0000 0.0000 0.0000	0.0111	0.0534	0.0644
PM10 Total		0.000.0	0.0421	0.2022	0.2443
Exhaust PM10	b/day		3.6600e- 003	1.0000e- 003	4.6600e- 003
Fugitive PM10)/qı		0.0384	0.2012	0.2396
802		0.0000	.0900e- 003	0.7176 1.8300e- (2.9200e- 003
00		0.000.0	0.0882	0.7176	8508.0
×ON		0.0000 0.0000 0.0000 0.0000	0.2537	0.0460	0.2997
ROG		0.0000	9.7600e- 0.2537 003	0.0709	0.0807
	Category	Hauling	Vendor	Worker	Total

Page 10 of 26

Date: 10/22/2021 7:50 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Grading - 2022

Unmitigated Construction On-Site

CO2e		0.000	2,895.268 4	2,895.268 4
N20				
CH4	lay		0.9289	0.9289
Total CO2	lb/day	0.000.0	2,872.046 2,872.046 0.9289 4 4	2,872.046 2,872.046 4 4
Bio- CO2 NBio- CO2 Total CO2			2,872.046 4	2,872.046 4
Bio- CO2			1 1 1 1 1 1	
PM2.5 Total		3.4247	0.8656	4.2903
Exhaust PM2.5		3.4247 0.0000	0.8656	0.8656
Fugitive PM2.5		3.4247		3.4247
PM10 Total		0.0000 7.0826	0.9409	8.0234
Exhaust PM10	lb/day		0.9409	0.9409
Fugitive PM10	/qI	7.0826		7.0826
S02			0.0297	0.0297
00			15.2727	15.2727
NOX			20.8551 15.2727 0.0297	1.9486 20.8551 15.2727 0.0297
ROG			1.9486	1.9486
	Category		Off-Road	Total

Unmitigated Construction Off-Site

C02e		0.0000	120.9138	156.2632	277.1770
N20		0.0000	0.0172	3.8100e- 003	0.0210
CH4	ay	0.000.0	1.2300e- 003	3.8400e- 003	5.0700e- 003
Total CO2	lb/day	0.0000 0.0000 0.0000 0.0000	115.7672	155.0309	270.7981
Bio- CO2 NBio- CO2 Total CO2		0.0000	115.7672 115.7672 1.2300e- 003	155.0309 155.0309 3.8400e- 003	270.7981
Bio- CO2					
PM2.5 Total		0.0000	0.0146	0.0452	0.0598
Exhaust PM2.5			3.5000e- 003	7.7000e- 004	4.2700e- 003
Fugitive PM2.5		0.0000 0.0000 0.0000 0.0000	0.0111	0.0445	0.0555
PM10 Total		0.000.0	0.0421	0.1685	0.2106
Exhaust PM10	day	0.0000	3.6600e- 003	8.4000e- 004	4.5000e- 003
Fugitive PM10	lb/day	0.0000	0.0384	0.1677	0.2061
SO2		0.000.0	0.0882 1.0900e- (0.5980 1.5200e- 0 003	0.6862 2.6100e- 003
00		0.0000	0.0882	0.5980	0.6862
×ON		0.0000).2537	0.0383	0.2920
ROG		0.0000	9.7600e- (003	0.0591	6890'0
	Category	Hauling	:	Worker	Total

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

Date: 10/22/2021 7:50 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Grading - 2022

Mitigated Construction On-Site

(1)		0	89	89:
CO2e		0.0000	2,895.268 4	2,895.268 4
N20				
CH4	ay		0.9289	0.9289
Total CO2	lb/day	0.0000	2,872.046 4	2,872.046 4
Bio- CO2 NBio- CO2 Total CO2			0.0000 2,872.046 2,872.046 0.9289 4 4	0.0000 2,872.046 2,872.046 4 4
Bio- CO2			0.0000	
PM2.5 Total		1.3357	0.8656	2.2012
Exhaust PM2.5			0.8656	0.8656
Fugitive PM2.5		1.3357 0.0000		1.3357
PM10 Total		2.7622	0.9409	3.7031
Exhaust PM10	lb/day	0.0000	0.9409	0.9409
Fugitive PM10)/qI	2.7622		2.7622
805			0.0297	0.0297
00			15.2727	15.2727
×ON			1.9486 20.8551 15.2727 0.0297	20.8551 15.2727 0.0297
ROG			1.9486	1.9486
	Category	Fugitive Dust	Off-Road	Total

Mitigated Construction Off-Site

ROG	XON	00	802	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Bio- CO2 NBio- CO2 Total CO2	CH4	NZO	CO2e
				lb/c	b/day							lb/day	ay		
	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000 0.0000	0.0000 0.0000	0.0000	0.0000		0.0000	0.0000 0.0000 0.00000 0.00000	0.0000	0.0000	0.0000
	0.2537	0.088	1.0900e- 003	0.0384	3.6600e- 003	0.0421	0.0111	3.5000e- 003	0.0146		115.7672	115.7672 115.7672	1.2300e- 003	0.0172	120.9138
	0.0591 0.0383	0.598	0 1.5200e- 003	0.1677	8.4000e- 004	0.1685	0.0445	7.7000e- 004	0.0452		155.0309	155.0309 155.0309 3.8400e-	3.8400e- 003	3.8100e- 003	156.2632
	0.0689 0.2920	0.6862	0.6862 2.6100e- 003	0.2061	4.5000e- 003	0.2106	0.0555	4.2700e- 003	0.0598		270.7981	270.7981 270.7981	5.0700e- 003	0.0210	0.0210 277.1770

Page 12 of 26

9 12 of 26 Date: 10/22/2021 7:50 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

3.4 Building Construction - 2022 Unmitigated Construction On-Site

CO2e		2,569.632 2	2,569.632 2
N20			
CH4	ay	0.6120	0.6120
Total CO2	lb/day	2,554.333 6	2,554.333 6
Bio- CO2 NBio- CO2 Total CO2		2,554.333 2,554.333 0.6120 6 6	2,554.333 2,554.333 0.6120 6 6
Bio- CO2			
PM2.5 Total		0.7612	0.7612
Exhaust PM2.5		0.7612 0.7612	0.7612
Fugitive PM2.5			
PM10 Total		0.8090	0.8090
Exhaust PM10	lb/day	0.8090 0.8090	0608'0
Fugitive PM10)/q		
S02		0.0269	0.0269
00		16.3634	16.3634
×ON		1.7062 15.6156 16.3634 0.0269	1.7062 15.6156 16.3634
ROG		1.7062	1.7062
	Category	Off-Road	Total

Unmitigated Construction Off-Site

CO2e		0.0000	665.0261	927.1614	0.1170 1,592.187
N2O		0.0000	0.0944	0.0226	0.1170
CH4	ay	0.000.0	6.7400e- 003	0.0228	0.0295
Total CO2	lb/day	0.0000 0.0000 0.0000 0.0000	636.7196	919.8498	1,556.569 4
NBio- CO2 Total CO2		0.0000	636.7196 636.7196 6.7400e- 003	919.8498 919.8498	1,556.569 1,556.569 4 4
Bio- CO2			 		
PM2.5 Total		0.0000	0.0801	0.2684	0.3485
Exhaust PM2.5			0.0193	4.5700e- 003	0.0238
Fugitive PM2.5		0.0000 0.0000 0.0000	0.0609	0.2638	0.3247
PM10 Total		0.0000	0.2315	0.9998	1.2313
Exhaust PM10	day	0.0000	0.0201	4.9600e- 003	0.0251
Fugitive PM10	lb/day		0.2114	0.9948	1.2062
SO2		0.0000	0.4852 6.0100e- 0.2 003	3.5481 9.0400e- 0.9 003	0.0151
00		0.0000	0.4852	3.5481	4.0333
NOX		0.0000	1.3954	0.2273	0.4044 1.6227 4.0333 0.0151 1.2062
ROG		0.0000 0.0000 0.0000 0.0000	0.0537	0.3507	0.4044
	Category	Hauling	: : : : : ;	Worker	Total

Page 13 of 26

Date: 10/22/2021 7:50 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

3.4 Building Construction - 2022

Mitigated Construction On-Site

CO2e		2,569.632 2	2,569.632 2
N20 C		2,5	2,5
CH4	lb/day	0.6120	0.6120
Total CO2	/qı	2,554.333 6	2,554.333 6
Bio- CO2 NBio- CO2 Total CO2		2,554.333 6	0.0000 2,554.333 2,554.333 0.6120 6 6
Bio- CO2		0.0000	
PM2.5 Total		0.7612 0.7612 0.0000 2,554.333 2,554.333 0.6120 6 6	0.7612
Exhaust PM2.5		0.7612	0.7612
Fugitive PM2.5			
PM10 Total		0.8090	0608.0
Exhaust PM10	lb/day	0.8090 0.8090	0.8090
Fugitive PM10	/qı		
S02		0.0269	0.0269
00		16.3634	16.3634
NOx		15.6156	1.7062 15.6156 16.3634
ROG		1.7062 15.6156 16.3634 0.0269	1.7062
	Category	Off-Road	Total

Mitigated Construction Off-Site

				' ₊₊	_	
CO2e		0.0000	665.0261	927.1614	1,592.187 4	
N20		0.0000	0.0944	0.0226	0.1170	
CH4	ay	0.000.0	6.7400e- 003	0.0228	0.0295	
Total CO2	lb/day	0.0000 0.0000 0.0000 0.0000	636.7196	919.8498	1,556.569 4	
Bio- CO2 NBio- CO2 Total CO2			0.0000	636.7196 636.7196	919.8498 919.8498	1,556.569 4
Bio- CO2			<u>. </u>			
PM2.5 Total		0.0000	0.0801	0.2684	0.3485	
Exhaust PM2.5		0.0000	0.0193	4.5700e- 003	0.0238	
Fugitive PM2.5			0.0609	0.2638	0.3247	
PM10 Total		0.0000 0.0000	0.2315	0.9998	1.2313	
Exhaust PM10	lb/day	0.0000	0.0201	4.9600e- 003	0.0251	
Fugitive PM10)/q	0.000.0	0.2114	0.9948	1.2062	
SO2		0.0000	0.4852 6.0100e- 003	9.0400e- 003	0.0151	
00		0.000.0	0.4852	3.5481	4.0333	
NOX		0.0000	1.3954	0.2273	0.4044 1.6227	
ROG		0.0000 0.0000 0.0000 0.0000	0.0537	0.3507	0.4044	
	Category	Hauling	Vendor	Worker	Total	

Page 14 of 26

4 of 26 Date: 10/22/2021 7:50 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2023 Unmitigated Construction On-Site

CO2e		2,570.406	2,570.406 1
N20 C		2,5	2,5
		620	079
CH4	lb/day	9.0	0.6079
Total CO2	IF	2,555.209 9	2,555.209 9
Bio- CO2 NBio- CO2 Total CO2		2,555,209 2,555,209 0.6079 9 9	2,555.209 2,555.209 9 9
Bio- CO2			
PM2.5 Total		0.6584	0.6584
Exhaust PM2.5		0.6584	0.6584
Fugitive PM2.5			
PM10 Total		0.6997	2669'0
Exhaust PM10	b/day	0.6997	0.6997
Fugitive PM10)/qı		
SO2		0.0269	0.0269
00		16.2440	16.2440
×ON		1.5728 14.3849 16.2440 0.0269	1.5728 14.3849 16.2440 0.0269
ROG		1.5728	1.5728
	Category	Off-Road	Total

Unmitigated Construction Off-Site

CO2e		0.0000	4 638.4732	902.2539	0.1112 1,540.727
NZO		0.0000	0.0904	0.0209	0.1112
CH4	lb/day	0.0000	6.2300e- 003	0.0205	0.0267
Total CO2)/qI	0.0000 0.0000 0.0000 0000.0	611.3943	895.5207 895.5207	1,506.915 0
Bio- CO2 NBio- CO2 Total CO2		0.000.0	611.3943 611.3943 6.2300e- 003	895.5207	1,506.915 1,506.915 0 0
Bio- CO2		1-2-2-2-	; ; ; ; ; ;	: : : : : :	
PM2.5 Total		0.0000	0.0698	0.2681	03380
Exhaust PM2.5		0.0000 0.0000 0.0000	8.9800e- 003	4.3000e- 003	0.0133
Fugitive PM2.5		0.0000	0.0609	0.2638	0.3247
PM10 Total		0.0000	0.2208	0.9995	1.2202
Exhaust PM10	b/day	0.0000	9.3900e- 003	4.6700e- 003	0.0141
Fugitive PM10	/ql	0.0000	- 0.2114	0.9948	1.2062
SO2		0.0000	5.7700e 003	8.7500e- 0.9 003	3.7090 0.0145
00		0.000.0	0.4439	3.2650	3.7090
×ON		0.0000	1.0781	0.2009	1.2791
ROG		0.0000	0.0372	0.3252	0.3624
	Category	Hauling	Vendor	Worker	Total

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

Page 15 of 26

Date: 10/22/2021 7:50 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2023 Mitigated Construction On-Site

ø.		406	406
CO2e		2,570.406	2,570.406 1
N20			
CH4	бъ	0.6079	0.6079
Total CO2	lb/day	2,555.209 9	2,555.209 9
Bio- CO2 NBio- CO2 Total CO2		2,555.209 9	0.0000 2,555.209 2,555.209 9 9
Bio- CO2		0.0000 2,555.209 2,555.209 0.6079	0.000
PM2.5 Total			0.6584
Exhaust PM2.5		0.6584 0.6584	0.6584
Fugitive PM2.5			
PM10 Total		7669.0	0.6997
Exhaust PM10	ау	7669.0 7669.0	0.6997
Fugitive PM10	lb/day		
SO2		0.0269	0.0269
00		16.2440	16.2440
XON		1.5728 14.3849 16.2440 0.0269	1.5728 14.3849 16.2440 0.0269
ROG		1.5728	1.5728
	Category	Off-Road	Total

Mitigated Construction Off-Site

			7	6	7								
CO2e		0.0000	638.4732	902.2539	1,540.727 1								
N20		0.0000	0.0904	0.0209	0.1112								
CH4	ау	0.000.0	3 6.2300e- 0 003	0.0205	0.0267								
Total CO2	lb/day	0.0000 0.0000 0.0000 0.0000	611.3943	895.5207	1,506.915 0								
Bio- CO2 NBio- CO2 Total CO2			0.0000	611.3943 611.3943	895.5207 895.5207	1,506.915 1,506.915 0 0							
Bio- CO2			 										
PM2.5 Total		0.0000	0.0698	0.2681	0.3380								
Exhaust PM2.5										0.0000	8.9800e- 003	4.3000e- 003	0.0133
Fugitive PM2.5		0.0000 0.0000	0.0609	0.2638	0.3247								
PM10 Total		0.000.0	0.2208	0.9995	1.2202								
Exhaust PM10	lb/day	0.0000	9.3900e- 003	4.6700e- 003	0.0141								
Fugitive PM10	/qı	0.0000	0.2114	0.9948	1.2062								
S02			0.0000	5.7700e- (003	8.7500e- 003	0.0145							
00		0.000.0	0.4439	3.2650 8.7500e- 0.9 003	3.7090								
×ON		0.0000	1.0781	0.2009	1.2791								
ROG		0.0000 0.0000 0.0000 0.0000	0.0372	0.3252	0.3624								
	Category	Hauling	Vendor	Worker	Total								

Page 16 of 26

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

Date: 10/22/2021 7:50 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Paving - 2023

Unmitigated Construction On-Site

CO2e		2,225.433 6	0.0000	2,225.433 6
N20		2		2
CH4	ay	0.7140		0.7140
Total CO2	lb/day	2,207.584 2,207.584 0.7140 1 1	0.000.0	2,207.584 2,207.584
Bio- CO2 NBio- CO2 Total CO2		2,207.584 1		2,207.584 1
Bio- CO2		1-1-1-1-1	 	
PM2.5 Total		0.4694	0.0000	0.4694
Exhaust PM2.5		0.4694	0.0000	0.4694
Fugitive PM2.5				
PM10 Total	lb/day	0.5102	0.0000	0.5102
Exhaust PM10		0.5102	0.0000	0.5102
Fugitive PM10	/qı			
S02		0.0228		0.0228
00		14.5842		10.1917 14.5842 0.0228
×ON		1.0327 10.1917 14.5842 0.0228		10.1917
ROG		1.0327	0.3930	1.4257
	Category	Off-Road	Paving	Total

Unmitigated Construction Off-Site

			_				
CO2e		0.0000	0.0000	152.0653	152.0653		
N20		0.0000 0.0000 0.0000 0.0000	0.0000	3.5200e- 003	3.5200e- 003		
CH4	lay	0.000.0	0.000.0	150.9305 150.9305 3.4500e- 003	3.4500e- 003		
Total CO2	lb/day	0.0000	0.0000	150.9305	150.9305		
Bio- CO2 NBio- CO2 Total CO2					0.0000	0.0000	150.9305
Bio- CO2							
PM2.5 Total		0.0000	0.0000	0.0452	0.0452		
Exhaust PM2.5			0.0000	7.2000e- 004	7.2000e- 004		
Fugitive PM2.5		0.0000 0.0000 0.0000	0.0000	0.0445	0.0445		
PM10 Total		0.000.0	0.000.0	0.1685	0.1685		
Exhaust PM10	lb/day	0.0000	0.0000	7.9000e- 004	7.9000e- 004		
Fugitive PM10)/q	0.0000	0.0000	0.1677	0.1677		
SO2		0.000.0	0.0000 0.0000	0.5503 1.4700e- 003	0.5503 1.4700e- 003		
00		0.0000	0.0000	0.5503	0.5503		
NOx		0.0000 0.0000 0.0000 0.0000	0.0000	0.0339	0.0339		
ROG		0.0000	0.0000	0.0548	0.0548		
	Category	Hauling	Vendor	Worker	Total		

Page 17 of 26 CalEEMod Version: CalEEMod.2020.4.0

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

Date: 10/22/2021 7:50 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Paving - 2023

Mitigated Construction On-Site

	ROG	×ON	00	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Bio- CO2 NBio- CO2 Total CO2	CH4	N20	CO2e
Category					lb/day	day							lb/day	ау		
Off-Road	1.0327	10.1917	1.0327 10.1917 14.5842 0.0228	0.0228		0.5102 0.5102	0.5102		0.4694 0.4694	0.4694	0.0000	2,207.584 1	0.0000 2,207.584 2,207.584 0.7140	0.7140		2,225.433 6
Paving	0.3930					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	1.4257	10.1917	1.4257 10.1917 14.5842 0.0228	0.0228		0.5102	0.5102		0.4694	0.4694	0.0000	2,207.584 1	0.0000 2,207.584 2,207.584 0.7140	0.7140		2,225.433 6

Mitigated Construction Off-Site

2 Total CO2 CH4 N2O CO2e	lb/day	0.0000 0.0000 0.0000 0.0000	0.0000 0.0000 0.0000	150.9305 150.9305 3.4500e- 3.5200e- 152.0653 003 003	150.9305 150.9305 3.4500e- 3.5200e- 152.0653 003
Bio- CO2 NBio- CO2 Total CO2		0.0000	0.0000	150.9305	150.9305
st PM2.5 5 Total		0.0000	0.0000	le- 0.0452	le- 0.0452
Fugitive Exhaust PM2.5		0.0000 0.0000	0.0000 0.0000	0.0445 7.2000e- 004	0.0445 7.2000e- 004
PM10 Fi		0.0000	0.0000	0.1685	0.1685
Exhaust PM10	lb/day	0.0000	0.0000	7.9000e- 004	7.9000e- 004
2 Fugitive PM10		0.0000	0.0000	0e- 0.1677 3	0e- 0.1677
CO SO2		0.0000 0.0000 0.0000 0.0000	0.0000 0.0000	0.5503 1.4700e- 0.1 003	0.5503 1.4700e- 0.1677
×ON		0.0000	0.0000	0.0339 0	0.0548 0.0339 0
ROG		0.0000	0.0000	0.0548	0.0548
	Category	Hauling	Vendor	Worker	Total

Page 18 of 26

Date: 10/22/2021 7:50 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Architectural Coating - 2023 **Unmitigated Construction On-Site**

		_			
CO2e		0.0000	281.8690	281.8690	
N20					
CH4	ÁI		0.0168	0.0168	
Fotal CO2	lb/day	0.000.0	281.4481	281.4481	
NBio- CO2			281.4481 281.4481	281.4481 281.4481	
Bio- CO2 NBio- CO2 Total CO2					
PM2.5 Total		00000	0.0708	0.0708	
Exhaust PM2.5	lb/day	0.000.0	0.0708	0.0708	
Fugitive PM2.5					
PM10 Total		0.000.0	0.0708	0.0708	
Exhaust PM10		ау	0.0000	0.0708	0.0708
Fugitive PM10					
S02			2.9700e- 003	2.9700e- 003	
00			1.8111	1.8111	
XON					1.3030
ROG		43.3216	0.1917 1.3030 1.8111 2.9700e- 003	43.5133 1.3030 1.8111 2.9700e-	
	Category	D	Off-Road	Total	

Unmitigated Construction Off-Site

C02e		0.0000	0.0000	182.4783	182.4783
N20		0.000 0.0000 0.0000	0.0000	4.2200e- 003	4.2200e- 003
CH4	ay	0.000.0	0.000.0	4.1400e- 003	4.1400e- 003
Total CO2	lb/day	0.000 0.0000	0.0000	181.1165 181.1165 4.1400e- 003	181.1165 181.1165
Bio- CO2 NBio- CO2 Total CO2		0.0000	0.0000	181.1165	181.1165
Bio- CO2			 		
PM2.5 Total		0.0000	0.0000	0.0542	0.0542
Exhaust PM2.5	b/day	0.000.0	0.0000	8.7000e- 004	8.7000e- 004
Fugitive PM2.5		0.0000 0.0000 0.0000 0.0000	0.0000	0.0534	0.0534
PM10 Total		0.000.0	0.0000	0.2021	0.2021
Exhaust PM10		0.0000	0.0000	9.4000e- 004	9.4000e- 004
Fugitive PM10	o/ql	0.000.0	0.0000	0.2012	0.2012
SO2		0.0000	0.0000	1.7700e- 003	1.7700e- 003
00		0.000.0	0.0000	0.6603 1.7700e- (0.6603 1.7700e- 003
XON		0.0000 0.0000 0.0000 0.0000	0.0000	0.0406	0.0406
ROG		0.0000	0.0000	0.0658	0.0658
	Category	Hauling	Vendor	Worker	Total

Page 19 of 26 CalEEMod Version: CalEEMod.2020.4.0

Date: 10/22/2021 7:50 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Architectural Coating - 2023

Mitigated Construction On-Site

CO2e		0.0000	281.8690	281.8690		
NZO			2	Ř		
CH4	13		0.0168	0.0168		
Total CO2	lb/day	0.000.0	0.0000 281.4481 281.4481	0.0000 281.4481 281.4481		
NBio- CO2			281.4481	281.4481		
Bio- CO2 NBio- CO2 Total CO2			0.0000	0.000.0		
PM2.5 Total		0.0000	0.0708	0.0708		
Exhaust PM2.5	lb/day	0.000.0	0.0708	0.0708		
Fugitive PM2.5						
PM10 Total		0.000.0	0.0708	0.0708		
Exhaust PM10		0.0000	0.0708	0.0708		
Fugitive PM10						
805			2.9700e- 003	2.9700e- 003		
00					1.8111	1.8111
XON				1.3030	43.5133 1.3030 1.8111 2.9700e-	
ROG		43.3216	0.1917 1.3030 1.8111 2.9700e-	43.5133		
	Category	D	Off-Road	Total		

Mitigated Construction Off-Site

C02e		0.0000	0.0000	182.4783	182.4783			
N20		0.0000	0.0000	4.2200e- 18 003	4.2200e- 003			
CH4	lb/day	lb/day	lb/day	0.000 0.0000 0.0000	0.000.0	4.1400e- 003	4.1400e- 003	
Total CO2				0.000 0.0000	0.0000	181.1165	181.1165	
Bio- CO2 NBio- CO2 Total CO2		0.0000	0.0000	181.1165 181.1165	181.1165 181.1165			
Bio- CO2								
PM2.5 Total		0.0000	0000:0	0.0542	0.0542			
Exhaust PM2.5	lb/day	0.0000	0.0000	8.7000e- 004	8.7000e- 004			
Fugitive PM2.5		lb/day	0.0000 0.0000 0.0000 0.0000	0.000.0	0.0534	0.0534		
PM10 Total			0.000.0	0.0000	0.2021	0.2021		
Exhaust PM10			ау	ау	0.0000	0.0000	9.4000e- 004	9.4000e- 004
Fugitive PM10			0.0000	0.0000	0.2012	0.2012		
SO2		0.0000	0.0000	1.7700e- 003	1.7700e- 003			
00		0.0000	0.0000	0.6603	0.6603 1.7700e- 003			
×ON		0.0000	0.000 0.0000	0.0406 0.6603 1.7700e- 003	0.0406			
ROG		0.0000 0.0000 0.0000 0.0000	0.0000	0.0658	0.0658			
	Category	Hauling	Vendor	Worker	Total			

Page 20 of 26

Date: 10/22/2021 7:50 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

Increase Transit Accessibility

Improve Pedestrian Network

CO2e		3,731.777 3	4,689,109 4,689.109 0.2202 0.2110 4,757.485
N20		0.1730	0.2110
CH4	ay	0.1860	0.2202
Total CO2	lb/day	3,675.576 0	4,689.109 7
Bio- CO2 NBio- CO2 Total CO2 CH4		3,675.576 3,675.576 0.1860 0.1730 3,731.777	4,689.109 7
Bio- CO2			
PM2.5 Total		0.9841	1.2636
Exhaust PM2.5		0.9584 0.0257 0.9841	0.0324
Fugitive PM2.5		0.9584	4.6495 1.2312 0.0324
PM10 Total		3.6198	4.6495
Exhaust PM10	b/day	0.0275	0.0346
Fugitive PM10	o/ql		4.6149
802		0.0355	0.0453
00		15.9147	19.5803
XON		2.1454	1.9907 2.6014 19.5803 0.0453 4.6149
ROG		1.8068 2.1454 15.9147 0.0355 3.5923	1.9907
	Category	Mitigated	Unmitigated

4.2 Trip Summary Information

	Aver	Average Daily Trip Rate	ate	Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
City Park	00.0	00.00	00.00		
Other Asphalt Surfaces		00.00	0.00		
Single Family Housing	631.81	639.18	572.85	2,133,806	1,661,006
Total	631.81	639.18	572.85	2,133,806	1,661,006

4.3 Trip Type Information

% e	Pass-by	9	0
Trip Purpose %	Diverted		0
	Primary		0
	H-O or C-NW		0.00
% du_L	H-S or C-C	48.00	0.00
	H-W or C-W	33.00	0.00 0.00 06.9
	H-W or C-W H-S or C-C H-O or C-NW H-W or C-W H-S or C-C H-O or C-NW	9:30	9.90
Miles	H-S or C-C	8.40	8.40
	H-W or C-W	16.60	16.60
	Land Use	City Park	Other Asphalt Surfaces

Page 21 of 26

Date: 10/22/2021 7:50 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	,	
% es	Pass-by	3
Trip Purpose %	Diverted	11
	Primary	98
	H-O or C-NW H-W or C-W H-S or C-C H-O or C-NW	40.60
Trip %	H-S or C-C	19.20
	H-W or C-W	40.20
	H-O or C-NW	8.70
Miles	H-S or C-C	2.90
	H-W or C-W H-S or C-C	14.70
	Land Use	Single Family Housing

4.4 Fleet Mix

LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	NBUS	MCY	SBUS	MH
0.173186	ے ا	.138405	0.025906	0.007191	0.011447		0.000611	0.000309	0.023821	0.001097	0.005189
Other Asphalt Surfaces 0.537845 0.056225 0.173186 0.133		0.138405	0.025906	0.007191	0.011447	0.537845 0.056225 0.173186 0.138405 0.025906 0.007191 0.011447 0.018769 0.000611 0.000309 0.023821 0.001097 0.005189	0.000611	0.000309	0.023821	0.001097	0.005189
0.173186	O	.138405	0.025906	0.007191	0.011447	0.537845 0.056225 0.173186 0.138405 0.025906 0.007191 0.011447 0.018769 0.000611 0.000309 0.023821 0.001097 0.005189	0.000611	0.000309	0.023821	0.001097	0.005189

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

Exceed Title 24

Kilowatt Hours of Renewable Electricity Generated

CO2e		30.6550	4.5004
NZO		577.2248 577.2248 0.0111 0.0106 580.6550	610.8703 610.8703 0.0117 0.0112 614.5004
CH4	^	0.0111	0.0117
Total CO2	lb/day	577.2248	610.8703
Bio- CO2 NBio- CO2 Total CO2		577.2248	610.8703
Bio- CO2			
PM2.5 Total		0.0366	0.0387
Exhaust PM2.5		0.0366	0.0387
Fugitive PM2.5			
PM10 Total		0.0366 0.0366	0.0387
Exhaust PM10	lb/day	0.0366	0.0387
Fugitive PM10			
SO2		2.8900e- 003	3.0500e- 003
00		0.1924	0.2036
×ON		0.4522	0.0560 0.4785 0.2036 3.0500e- 003
ROG		0.0529 0.4522 0.1924 2.8900e-	0.0560
	Category		NaturalGas Unmitigated

Date: 10/22/2021 7:50 AM Page 22 of 26 CalEEMod Version: CalEEMod.2020.4.0

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Unmitigated

		L												I	I		
	NaturalGa s Use	ROG	×ON	co	S02	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	Bio- CO2 NBio- CO2 Total CO2	Total CO2	CH4	NZO	CO2e
Land Use	kBTU/yr					lb/day	ау							lb/day	ау		
City Park	0	0.0000 0.0000 0.0000	0.0000	0.0000	0.0000		0.000.0	0.0000		0.0000	0.0000		0.000.0	0.0000 0.0000 0.0000 0.0000	0.0000	0.0000	0.0000
Other Asphalt Surfaces	0	0.0000	0.000.0	0000	0.0000		0.000.0	0.000.0		0.0000	0.0000		0.000.0	0.0000	0.0000	0.0000	0.000.0
Single Family Housing	5192.4	0.0560	0.4785 0	.2036	3.0500e- 003		0.0387	0.0387	- 	0.0387	0.0387		610.8703	610.8703 610.8703	0.0117	0.0112	614.5004
Total		0.0560	0.4785	0.2036	3.0500e- 003		0.0387	0.0387		0.0387	0.0387		610.8703	610.8703	0.0117	0.0112	614.5004

Page 23 of 26 CalEEMod Version: CalEEMod.2020.4.0

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

Date: 10/22/2021 7:50 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Mitigated

CO2e		0.0000	0.0000	580.6550	580.6550	
N2O		0.0000 0.0000 0.0000 0.0000	0.0000	0.0106	0.0106	
CH4	lay	0.0000	0.0000	0.0111	0.0111	
Total CO2	lb/day	0.000.0	0.0000	577.2248	577.2248	
Bio- CO2 NBio- CO2 Total CO2		0.0000	0.0000	577.2248	577.2248	
Bio- CO2		1-2-2-2-	: : : : : : :	 		
PM2.5 Total		0.0000 0.0000	0.0000	0.0366	9980'0	
Exhaust PM2.5			0.0000	0.0000	0.0366	0.0366
Fugitive PM2.5						
PM10 Total		0.0000	0.0000	0.0366	9980'0	
Exhaust PM10	lb/day	0.000.0 0.000.0	0.0000	0.0366	0.0366	
Fugitive PM10	/qı					
SO2		0.0000	0.0000	2.8900e- 003	2.8900e- 003	
00		0.0000	0.0000	0.1924 2.8900e- 003	0.1924	
NOx		0.0000 0.0000 0.0000	0.0000	0.4522	0.4522	
ROG		0.0000	0.0000	0.0529	0.0529	
NaturalGa s Use	kBTU/yr	0	0	4.90641		
	Land Use	City Park	Other Asphalt Surfaces	Single Family Housing	Total	

6.0 Area Detail

6.1 Mitigation Measures Area

No Hearths Installed

Page 24 of 26 CalEEMod Version: CalEEMod.2020.4.0

Date: 10/22/2021 7:50 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

CO2e		10.1926	3 9.5500e- 0.0000 10.1926 003
N20		0.000.0	0.0000
CH4	ay	9.5500e- 003	9.5500e- 003
Total CO2	lb/day	9.9538	9.9538
Bio- CO2 NBio- CO2 Total CO2		9.9538	9.9538
Bio- CO2		0.0000 9.9538 9.9538 9.5500e- 0.0000 10.1926 0.000	0.0000
PM2.5 Total		0.0306	0.0306
Exhaust PM2.5		0.0306 0.0306	0.0306 0.0306 0.0000 9.9538 9.9538
Fugitive PM2.5			
PM10 Total		0.0306	0.0306
Exhaust PM10	lb/day	0.0306 0.0306	0.0306
Fugitive PM10			
SO2		2.9000e- 004	2.9000e- 004
00		5.5256	5.5256
×ON		0.0637	0.0637
ROG		3.0778 0.0637 5.5256 2.9000e-	3.0778 0.0637 5.5256 2.9000e-
	Category	Mitigated	Unmitigated

6.2 Area by SubCategory

Unmitigated

C02e		0.0000	0.0000	0.0000	10.1926	10.1926
N20				0.0000		0.0000
CH4	ay		 	0.000.0	9.5500e- 003	9.5500e- 003
Total CO2	lb/day	0.000.0	0.0000	0.0000	9.9538	9.9538
Bio- CO2 NBio- CO2 Total CO2			 	0.0000	9.9538	9.9538
Bio- CO2				0.0000		0.0000
PM2.5 Total		0.000	0.000.0	0.000.0	0.0306	0.0306
Exhaust PM2.5		0.000.0	0.000.0	0.000.0	0.0306	0.0306
Fugitive PM2.5			 	 		
PM10 Total		0.0000	0.0000	0.0000	0.0306	0.0306
Exhaust PM10	day	0.000.0	0.0000	0.0000	0.0306	0.0306
Fugitive PM10	lb/day					
S02				0.000.0	2.9000e- 004	2.9000e- 004
00				0.0000	5.5256	5.5256
NOX			[0.0000	0.0637	0.0637
ROG		0.2374	2.6742	0.0000	0.1662	3.0778
	SubCategory	Architectural Coating	Consumer Products	Hearth	Landscaping	Total

Page 25 of 26

Date: 10/22/2021 7:50 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

CO2e		0.0000	0.0000	0.0000	10.1926	10.1926
N20				0.0000		0.0000
CH4	ay			0.0000	9.5500e- 003	9.5500e- 003
Total CO2	lb/day	0.000.0	0.0000	0.0000	9.9538	9.9538
Bio- CO2 NBio- CO2 Total CO2				0.0000	9.9538	9.9538
Bio- CO2			<u> </u>	0.000.0		0.0000
PM2.5 Total		0.000	0000.0	0000.0	0.0306	0.0306
Exhaust PM2.5		0.000.0	0.000.0	0.000.0	0.0306	0.0306
Fugitive PM2.5			r 	r 		
PM10 Total		0.000.0	0.000.0	0.0000	0.0306	0.0306
Exhaust PM10	//day	0.0000	0.0000	0.0000	0.0306	0.0306
Fugitive PM10	o/qı					
SO2				0.000	2.9000e- 004	2.9000e- 004
00			r 	0.000.0	5.5256	5.5256
XON				0.0000 0.0000	0.0637	0.0637
ROG		0.2374	2.6742	0.0000	0.1662	3.0778
	SubCategory	Architectural Coating	Consumer Products	Hearth	Landscaping	Total

7.0 Water Detail

7.1 Mitigation Measures Water

Install Low Flow Bathroom Faucet

Install Low Flow Kitchen Faucet

Install Low Flow Toilet

Install Low Flow Shower

Use Water Efficient Irrigation System

Page 26 of 26

Date: 10/22/2021 7:50 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

8.0 Waste Detail

8.1 Mitigation Measures Waste

Institute Recycling and Composting Services

9.0 Operational Offroad

Fuel Type	
Load Factor	
Horse Power	
Days/Year	
Hours/Day	
Number	
Equipment Type	

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Fuel Type	
Load Factor	
Horse Power	
Hours/Year	
Hours/Day	
Number	
Equipment Type	

Boilers

۱
Number

User Defined Equipment

Number	
Equipment Type	

11.0 Vegetation

Page 1 of 26

Date: 10/22/2021 7:52 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

TTM No. 38237 Discovery Residential

Riverside-South Coast County, Winter

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Other Asphalt Surfaces	3.00	Acre	3.00		0
! !	0.56	Acre	0.56	24,393.60	0
Single Family Housing	67.00	Dwelling Unit	5.24	5.24 132,660.00	192

1.2 Other Project Characteristics

Urbanization	Urban	Wind Speed (m/s)	2.4	Precipitation Freq (Days)	28
Climate Zone	10			Operational Year	2024

Utility Company Southern California Edison

1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - Total Project Site = 8.8 acres

Construction Phase -

Trips and VMT - 6 vendor trips per day added to Site Preparation and Grading phases to account for water truck emissions

Vehicle Trips - Weekday trip rate set to match Traffic Scoping Agreement

Woodstoves - No Woodstoves or fireplaces.

Construction Off-road Equipment Mitigation - Water Exposed Area 3x per day selected to account for SCAQMD Rule 403 minimum requirements

Mobile Land Use Mitigation - Improve Pedestrian Network onsite and connecting offsite. Distance to nearest bus stop 0.12 mile.

Area Mitigation -

Energy Mitigation - Exceed Title 24 by 7% selected to account for 2019 Title 24. 382,188 kWh generated per year from PV panels

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Water Mitigation - Install low-flow fixtures and use water-efficient irrigation selected to account for Title 24 Part 11 min requirements

Waste Mitigation - 50% reduction in waste selected to account for AB 341

New Value	0.00	67.00	0.00	132,660.00	5.24	6.00	6.00	0.00	0.00	0.00	9.43	0.00	0.00
Default Value	56.95	6.70	3.35	120,600.00	21.75	0.00	0:00	1.96	2.19	0.78	9.44	3.35	3.35
Column Name	NumberGas	NumberNoFireplace	NumberWood	LandUseSquareFeet	LotAcreage	VendorTripNumber	VendorTripNumber	ST_TR	SU_TR	WD_TR	WD_TR	NumberCatalytic	NumberNoncatalytic
Table Name	tblFireplaces	tblFireplaces	tblFireplaces	tblLandUse	tblLandUse	tblTripsAndVMT	tblTripsAndVMT	tblVehicleTrips	tblVehicleTrips	tblVehicleTrips	tblVehicleTrips	tblWoodstoves	tblWoodstoves

2.0 Emissions Summary

Page 3 of 26

Date: 10/22/2021 7:52 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	×ON	00	S02	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Bio- CO2 NBio- CO2 Total CO2 CH4	CH4	N20	CO2e
Year					o/qı	lb/day							lb/day	ay		
2022	3.2458	3.2458 33.3985 20.3709 0.0411 19.8966	20.3709	0.0411	19.8966	1.6173	21.5139	10.1669	1.6173 21.5139 10.1669 1.4880 11.6549		0.0000	4,024.942 3	0.0000 4,024.942 4,024.942 1.1979 0.1178 4,076.065	1.1979	0.1178	4,076.065
2023	43.5749	43.5749 15.7368 19.3541 0.0407	19.3541	0.0407	1.2062	0.7138	1.9200	0.3247	1.9200 0.3247 0.6717	0.9964	0.0000	3,979.543 8	0.0000 3,979.543 3,979.543 0.7174 0.1120 4,028.782 8 8 8	0.7174	0.1120	4,028.782 8
Maximum	43.5749	43.5749 33.3985 20.3709 0.0411 19.8966	20.3709	0.0411	19.8966	1.6173	21.5139	1.6173 21.5139 10.1669	1.4880	1.4880 11.6549	0.0000	4,024.942 3	0.0000 4,024.942 4,024.942 1.1979 3	1.1979	0.1178 4,076.065	4,076.065

Mitigated Construction

CO2e	lb/day	76.065	28.782 8	4,076.065
		3 4,0	0,4	
N20		0.1178	0.1120 4,028.782 8	0.1178
CH4		1.1979	0.7174	1.1979
Total CO2		4,024.942 3	3,979.543 8	4,024.942 3
Bio- CO2 NBio- CO2 Total CO2		4,024.942 3	3,979.543 8	4,024.942 3
Bio- CO2		0.0000 4,024.942 4,024.942 1.1979 0.1178 4,076.065	0.0000 3,979.543 3,979.543 0.7174 8 8	0.0000 4,024.942 4,024.942 3
PM2.5 Total	lb/day	5.4924	0.9964	5.4924
Exhaust PM2.5		1.6173 9.5231 4.0044 1.4880	0.6717	1.4880
Fugitive PM2.5		4.0044	0.3247	4.0044
PM10 Total		9.5231	1.9200	9.5231
Exhaust PM10		1.6173	0.7138	1.6173
Fugitive PM10		7.9059	1.2062	7.9059
SO2		0.0411	0.0407	0.0411
00		20.3709	19.3541	20.3709
×ON		33.3985	43.5749 15.7368 19.3541	43.5749 33.3985
ROG		3.2458 33.3985 20.3709 0.0411 7.9059	43.5749	43.5749
	Year	2022	2023	Maximum

Date: 10/22/2021 7:52 AM Page 4 of 26 CalEEMod Version: CalEEMod.2020.4.0

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

N20 CO2e	0.00 0.00
СН4	0.00
Total CO2	00.00
Bio- CO2 NBio-CO2 Total CO2	00.0
Bio- CO2	0.00
PM2.5 Total	48.71
Exhaust PM2.5	0.00
Fugitive PM2.5	58.74
PM10 Total	51.17
Exhaust PM10	0.00
Fugitive PM10	56.82
802	0.00
00	0.00
NON	00:0
ROG	0.00
	Percent Reduction

Page 5 of 26 CalEEMod Version: CalEEMod.2020.4.0

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

Date: 10/22/2021 7:52 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational **Unmitigated Operational**

8		SO2	Fugitive	Exhaust	PM10	Fugitive	Exhaust	PM2.5	Bio-CO2	Bio- CO2 NBio- CO2 Total CO2	Total CO2	CH4	NZO	CO2e
				PM10	l otal		PM2.5	l otal						
			lb/day	ay							lb/day	ay		
3.0778 0.0637 5.5256 2.9000e-	21	.9000e- 004		0.0306	0.0306		0.0306	0.0306	0.0000 9.9538	9.9538	9.9538 9.5500e- 003	9.5500e- 003	0.0000 10.1926	10.1926
0.0560 0.4785 0.2036 3.0500e- 003	90.0			0.0387	0.0387		0.0387	0.0387		610.8703	610.8703 610.8703 0.0117	0.0117	0.0112	614.5004
2.7590 17.2944 0.0421	0.04		4.6149	0.0346	4.6495	1.2312	0.0324	1.2636		4,353.751 9	4,353.751 4,353.751 9 9	0.2251	0.2154	4,423.563 4
23.0237 0.0454	0.045		4.6149	0.1039	4.7188	1.2312	0.1018	1.3329	0.0000	4,974.576 0	4,974.576 4,974.576 0 0	0.2464	0.2266	5,048.256 3

Mitigated Operational

CO2e		10.1926	580.6550	3,472.395 4	4,063.243 0
N20		0.0000	0.0106	0.1767	0.1873
CH4	ay	9.5500e- 0.0000 003	0.0111	0.1920	0.2126
Total CO2	lb/day	9.9538	577.2248	3,414.944 1	4,002.122 7
Bio- CO2 NBio- CO2 Total CO2		9.9538	577.2248 577.2248	3,414.944 3,414.944 1	0.0000 4,002.122 4,002.122
Bio- CO2		0.0000	 		0.0000
PM2.5 Total		0.0306	0.0366	0.9841	1.0513
Exhaust PM2.5		0.0306	0.0366	0.0258	0.0930
Fugitive PM2.5			 	0.9584	0.9584
PM10 Total		0.0306	0.0366	3.6198	3.6870
Exhaust PM10	lb/day	0.0306	0.0366	0.0275	0.0947
Fugitive PM10)/q			3.5923	3.5923
S02		2.9000e- 004	2.8900e- 003	0.0330	0.0362
00		5.5256	.1924	14.2277	2.7910 19.9458
XON		0.0637	0.4522	2.2752	
ROG		3.0778	0.0529	1.5169	4.6476
	Category	Area	Energy	Mobile	Total

Date: 10/22/2021 7:52 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

CO2e	19.51
N20	17.35
СН4	13.72
Total CO2	19.55
Bio- CO2 NBio-CO2 Total CO2	19.55
Bio- CO2	00'0
PM2.5 Total	21.13
Exhaust PM2.5	99'8
Fugitive PM2.5	22.16
PM10 Total	21.87
Exhaust PM10	8:90
Fugitive PM10	22.16
802	20.33
00	13.37
NOX	15.45
ROG	3.80
	Percent Reduction

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Num Days Week	Num Days	Phase Description
1	Site Preparation	paration		11/18/2022	5	10	
2	Grading			12/16/2022	5	 	
3	g Construction	g Construction		11/3/2023	5	 	
4				12/1/2023	5		
5	Architectural Coating	Architectural Coating	12/2/2023	12/29/2023	5	20	

Acres of Grading (Site Preparation Phase): 15

Acres of Grading (Grading Phase): 20

Acres of Paving: 3

Residential Indoor: 268,637; Residential Outdoor: 89,546; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 7,841 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
ation	Rubber Tired Dozers	8	8.00		0.40
Site Preparation	Tractors/Loaders/Backhoes	4	8.00		
Grading	Excavators	-	8.00		0.38
Grading	Graders	-	8.00		0.41
			8.00		
Grading	Tractors/Loaders/Backhoes	3	8.00	97	0.37

Page 7 of 26

Date: 10/22/2021 7:52 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Building Construction	Cranes		7.00	231	0.29
Building Construction	Forklifts	C	8.00	88	0.20
Building Construction	Generator Sets		8.00	84	0.74
1 1 1 1 1 1 1 1	Tractors/Loaders/Backhoes	r I	7.00	26	0.37
Building Construction	Welders		8.00	46	0.45
Paving	Pavers	2	8.00	130	0.42
Paving	Paving Equipment	2	8.00	132	0.36
Paving	Rollers	2	8.00	80	0.38
Architectural Coating	Air Compressors	1	00.9	78	0.48

Trips and VMT

g Slass		! ! !	 		
Hauling Vehicle Cla	HHDT	HHDT	HHDT	HHDT	HHDT
Vendor Hauling Vehicle Class	HDT_Mix	HDT_Mix	HDT_Mix	HDT_Mix	HDT_Mix
Worker Vehicle Class				20.00 LD_Mix	20.00 LD_Mix
Hauling Trip Length				! ! ! !	
Vendor Trip Length	06.9	9.90	9.90	9.90	06.90
Worker Trip Length		14.70	14.70	14.70	14.70
Hauling Trip Number	0.00	0.00	00:00	0.00	00:00
Vendor Trip Number	00.9	9.00	33.00	00.0	00.00
Worker Trip Number	18.00	15.00	89.00	15.00	18.00
Offroad Equipment Worker Trip Count Number	2	9	о	9	1
Phase Name	Site Preparation	Grading	Building Construction	Paving	Architectural Coating

3.1 Mitigation Measures Construction

Water Exposed Area

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

Date: 10/22/2021 7:52 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Site Preparation - 2022

Unmitigated Construction On-Site

		1	က္	ς.
CO2e		0.0000	3,715.865	3,715.865 5
N20				
CH4	зу		1.1922	1.1922
Total CO2	lb/day	0.000.0	3,686.061 9	3,686.061
NBio- CO2			3,686.061 3,686.061 1.1922 9 9	3,686.061 3,686.061 9
Bio- CO2 NBio- CO2 Total CO2			: : : : :	
PM2.5 Total		10.1025	1.4836	11.5860
Exhaust PM2.5		0.0000 19.6570 10.1025 0.0000 10.1025	1.4836	21.2696 10.1025 1.4836
Fugitive PM2.5		10.1025	 	10.1025
PM10 Total		19.6570	1.6126	21.2696
Exhaust PM10	lb/day	0.0000	1.6126	1.6126
Fugitive PM10)/qI	19.6570		19.6570
S02			0.0380	0.0380
8			19.6978	19.6978
×ON			3.1701 33.0835 19.6978 0.0380	3.1701 33.0835 19.6978 0.0380 19.6570
ROG			3.1701	3.1701
	Category	Fugitive Dust	Off-Road	Total

Unmitigated Construction Off-Site

			•	<i>(</i> 0	<u>~</u>
CO2e		0.0000	121.0492	170.0216	291.0708
N20		0.0000	0.0172	4.6800e- 003	0.0219
CH4	ay	0.000.0	1.2100e- 0 003	4.5800e- 003	5.7900e- 003
Total CO2	lb/day	0.0000 0.0000 0.0000 0.0000	115.8935 115.8935	168.5113 168.5113	284.4048
Bio- CO2 NBio- CO2 Total CO2		0.0000	115.8935	168.5113	284.4048
Bio- CO2					
PM2.5 Total		0.0000	0.0146	0.0543	0.0689
Exhaust PM2.5		0.0000	3.5100e- 003	9.2000e- 004	4.4300e- 003
Fugitive PM2.5		0.0000 0.0000 0.0000 0.0000	0.0111	0.0534	0.0644
PM10 Total		0.000.0	0.0421	0.2022	0.2443
Exhaust PM10	b/day		3.6700e- 003	1.0000e- 003	4.6700e- 003
Fugitive PM10)/qI	0.0000	0.0384	0.2012	0.2396
SO2		0.0000	1.0900e- 0. 003	0.5816 1.6600e- 0. 003	0.6732 2.7500e- 003
8		0.000.0	0.0916	0.5816	0.6732
XON		0.0000 0.0000 0.0000 0.0000	0.2673	0.0477	0.3150
ROG		0.0000	9.3500e- 003	0.0663	0.0756
	Category	Hauling	Vendor	Worker	Total

Page 9 of 26 CalEEMod Version: CalEEMod.2020.4.0

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

Date: 10/22/2021 7:52 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Mitigated Construction On-Site 3.2 Site Preparation - 2022

		1	10	10
CO2e		0.0000	3,715.865 5	3,715.865 5
N20				
CH4	λì		1.1922	1.1922
Total CO2	lb/day	0.000.0	3,686.061 9	
Bio- CO2 NBio- CO2 Total CO2			0.0000 3,686.061 3,686.061 1.1922 9 9	0.0000 3,686.061 3,686.061
Bio- CO2			0.000.0	0.000
PM2.5 Total		3.9400	1.4836	5.4235
Exhaust PM2.5			1.4836	1.4836
Fugitive PM2.5		3.9400 0.0000	 	3.9400
PM10 Total			1.6126	9.2788
Exhaust PM10	lay		1.6126	1.6126
Fugitive PM10	lb/day	7.6662	 	7.6662
SO2			0.0380	0.0380
00			19.6978	19.6978
NOx			3.1701 33.0835 19.6978 0.0380	3.1701 33.0835 19.6978
ROG			3.1701	3.1701
	Category	Fugitive Dust	Off-Road	Total

Mitigated Construction Off-Site

Ф		0	-92	9	80.
CO2e		0.0000	121.0492	170.0216	291.0708
N20		0.000.0	0.0172	4.6800e- 003	0.0219
CH4	lay	0.000.0	1.2100e- 003	4.5800e- 003	5.7900e- 003
Total CO2	lb/day	0.000.0	115.8935	168.5113 168.5113	284.4048 284.4048
Bio- CO2 NBio- CO2 Total CO2		0.0000	115.8935 115.8935 1.2100e-	168.5113	284.4048
Bio- CO2			i i i i		
PM2.5 Total		0.0000	0.0146	0.0543	0.0689
Exhaust PM2.5			3.5100e- 003	9.2000e- 004	4.4300e- 003
Fugitive PM2.5		0.000 0.0000 0.0000	0.0111	0.0534	0.0644
PM10 Total		0.000.0	0.0421	0.2022	0.2443
Exhaust PM10	lb/day	0.0000	3.6700e- 003	1.0000e- 003	4.6700e- 003
Fugitive PM10)/q		0.0384	0.2012	0.2396
802		0.0000	1.0900e- 003	1.6600e- 003	2.7500e- 003
00		0.0000 0.0000 0.0000 0.0000	0.0916 1.0900e- 003	0.5816 1.6600e- (0.6732 2.7500e- 003
×ON		0.0000	.2673	0.0477	0.3150
ROG		0.0000	9.3500e- C	0.0663	0.0756
	Category	Hauling	Vendor	Worker	Total

Page 10 of 26

Date: 10/22/2021 7:52 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Grading - 2022

Unmitigated Construction On-Site

CO2e		0.0000	2,895.268 4	2,895.268 4
NZO				
CH4	lay		0.9289	0.9289
Bio- CO2 NBio- CO2 Total CO2	lb/day	0.000.0	2,872.046 2,872.046 0.9289 4 4	2,872.046 2,872.046 4 4
NBio- CO2			2,872.046 4	2,872.046 4
Bio- CO2			1 1 1 1 1	
PM2.5 Total		3.4247	0.8656	4.2903
Exhaust PM2.5		3.4247 0.0000	0.8656	0.8656
Fugitive PM2.5		3.4247		3.4247
PM10 Total		7.0826	0.9409	8.0234
Exhaust PM10	lb/day	0.000	0.9409	0.9409
Fugitive PM10)/qI	7.0826		7.0826
802			0.0297	0.0297
00			15.2727	15.2727
NOx			20.8551 15.2727 0.0297	1.9486 20.8551 15.2727 0.0297
ROG			1.9486	1.9486
	Category	Fugitive Dust	Off-Road	Total

Unmitigated Construction Off-Site

CO2e		0.0000	121.0492	141.6847	262.7339
N20		0.0000	0.0172	3.9000e- 003	0.0211
CH4	ay	0.000.0	1.2100e- 003	3.8100e- 003	5.0200e- 003
Total CO2	lb/day	0.0000 0.0000 0.0000 0.0000	115.8935	140.4261	
Bio- CO2 NBio- CO2 Total CO2		0.000.0	115.8935 115.8935 1.2100e-	140.4261 140.4261 3.8100e- 003	256.3195 256.3195
Bio- CO2			 		
PM2.5 Total		0.0000	0.0146	0.0452	0.0598
Exhaust PM2.5			3.5100e- 003	7.7000e- 004	4.2800e- 003
Fugitive PM2.5		0.0000 0.0000 0.0000 0.0000	0.0111	0.0445	0.0555
PM10 Total		0.000.0	0.0421	0.1685	0.2106
Exhaust PM10	lay	0.0000	3.6700e- 003	8.4000e- 004	4.5100e- 003
Fugitive PM10	lb/day	0.0000	0.0384	0.1677	0.2061
802		0.0000 0.0000 0.0000 0.0000 0.0000	0.0916 1.0900e- 003	0.4846 1.3800e- 0 003	0.5762 2.4700e-
8		0.000.0	0.0916	0.4846	0.5762
XON		0.0000	673	0.0398	0.3071
ROG		0.0000	9.3500e- 0.2 003	0.0552	0.0646
	Category	Hauling		Worker	Total

Page 11 of 26

Date: 10/22/2021 7:52 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Grading - 2022

Mitigated Construction On-Site

	ROG	×ON	00	802	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	Bio- CO2 NBio- CO2 Total CO2	Total CO2	CH4	N20	CO2e
Category					lb/day	ay							lb/day	бъ		
Fugitive Dust					2.7622	0.0000	2.7622	1.3357 0.0000	0.000.0	1.3357			0.000.0			0.0000
Off-Road	1.9486	1.9486 20.8551 15.2727 0.0297	15.2727	0.0297		0.9409	0.9409		0.8656	0.8656	0.0000	2,872.046 4	0.0000 2,872.046 2,872.046 0.9289 4 4	0.9289	 	2,895.268
Total	1.9486	1.9486 20.8551 15.2727 0.0297 2.7622	15.2727	0.0297	2.7622	0.9409	3.7031	1.3357	0.8656	2.2012	0.0000	0.0000 2,872.046 2,872.046 4 4	2,872.046 4	0.9289		2,895.268 4

Mitigated Construction Off-Site

			7	_	6
CO2e		0.0000	121.0492	141.6847	262.7339
N2O		0.0000 0.0000 0.0000	0.0172	3.9000e- 003	0.0211
CH4	ay	0.000.0	1.2100e- (003	3.8100e- 003	5.0200e- 003
Total CO2	lb/day	0.0000 0.0000	115.8935 115.8935	140.4261 140.4261	256.3195
Bio- CO2 NBio- CO2 Total CO2		0.0000	115.8935	140.4261	256.3195
Bio- CO2					
PM2.5 Total		0.0000	0.0146	0.0452	0.0598
Exhaust PM2.5		0.000.0	3.5100e- 003	7.7000e- 004	4.2800e- 003
Fugitive PM2.5		0.0000 0.0000 0.0000 0.0000	0.0111	0.0445	0.0555
PM10 Total		0.000.0	0.0421	0.1685	0.2106
Exhaust PM10	b/day	0.0000	3.6700e- 003	8.4000e- 004	4.5100e- 003
Fugitive PM10)/qI	0.0000	0.0384	0.1677	0.2061
802		0.000.0	1.0900e- 0.0 003	0.4846 1.3800e- 0. 003	0.5762 2.4700e-
00		0.000.0	0.0916	0.4846	0.5762
×ON		0.0000 0.0000 0.0000 0.0000	0.2673	0.0398	0.3071
ROG		0.0000	9.3500e- 0.2673 003	0.0552	0.0646
	Category	Hauling	Vendor	Worker	Total

Page 12 of 26

Date: 10/22/2021 7:52 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2022 Unmitigated Construction On-Site

	ROG	×ON	00	S02	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive Exhaust PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Bio- CO2 NBio- CO2 Total CO2	CH4	NZO	CO2e
Category					lb/day	lay							lb/day	ay		
Off-Road	1.7062	1.7062 15.6156 16.3634 0.0269	16.3634	0.0269		0.8090 0.8090	0.8090		0.7612 0.7612	0.7612		2,554.333 6	2,554.333 2,554.333 0.6120 6 6	0.6120		2,569.632 2
Total	1.7062	1.7062 15.6156 16.3634 0.0269	16.3634	0.0269		0.8090	0.8090		0.7612	0.7612		2,554.333 6	2,554.333 2,554.333 6 6	0.6120		2,569.632 2

Unmitigated Construction Off-Site

CO2e		0.0000	665.7707	840.6623	1,506.432 9
NZO		0.0000 0.0000 0.0000 0.0000	0.0946	0.0232	0.1178
CH4	ay	0.000.0	6.6400e- 003	0.0226	0.0293
Total CO2	lb/day	0.000.0	637.4140 637.4140 6.6400e- 003	833.1947 833.1947	1,470.608 7
NBio- CO2 Total CO2		0.0000	637.4140	833.1947	1,470.608 1,470.608 7 7
Bio- CO2					
PM2.5 Total		0.0000	0.0802	0.2684	0.3486
Exhaust PM2.5		0.000.0	0.0193	4.5700e- 003	0.0239
Fugitive PM2.5		0.0000 0.0000 0.0000 0.0000	0.0609	0.2638	0.3247
PM10 Total		0.000.0	0.2315	0.9998	1.2313
Exhaust PM10	ı/day	0.0000	0.0202	4.9600e- 003	0.0251
Fugitive PM10)/ql	0.0000	0.2114	0.9948	1.2062
802		0.0000	0.0514 1.4701 0.5038 6.0100e-	0.2359 2.8755 8.1900e- 003	0.0142
00		0.000.0	0.5038	2.8755	3.3793
XON		0.0000	1.4701	0.2359	0.3790 1.7061 3.3793
ROG		0.0000 0.0000 0.0000 0.0000	0.0514	0.3276	0:3790
	Category	Hauling	Vendor	Worker	Total

Page 13 of 26

Date: 10/22/2021 7:52 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2022

Mitigated Construction On-Site

CO2e		2,569.632 2	2,569.632 2
N20		2,4	2,
CH4	,	0.6120	0.6120
Fotal CO2	lb/day	2,554.333 6	2,554.333 6
Bio- CO2 NBio- CO2 Total CO2		2,554.333 2 6	0.0000 2,554.333 2,554.333 0.6120 6 6
Bio- CO2		0.0000	0.000
PM2.5 Total		0.7612 0.7612 0.0000 2,554.333 2,554.333 0.6120	0.7612
Exhaust PM2.5		0.7612	0.7612
Fugitive PM2.5			
PM10 Total		0.8090	0.8090
Exhaust PM10	lb/day	0.8090 0.8090	0608'0
Fugitive PM10)/q		
SO2		0.0269	0.0269
00		16.3634	15.6156 16.3634 0.0269
×ON		1.7062 15.6156 16.3634 0.0269	15.6156
ROG		1.7062	1.7062
	Category	Off-Road	Total

Mitigated Construction Off-Site

CO2e		0.0000	665.7707	840.6623	1,506.432 9
N20		0.0000	0.0946	0.0232	0.1178
CH4	ay	0.000.0	6.6400e- 003	0.0226	0.0293
Total CO2	lb/day	0.0000 0.0000 0.0000 0.0000	637.4140 637.4140 6.6400e- 003	833.1947 833.1947	1,470.608 1,470.608 7 7
NBio- CO2 Total CO2		0.0000	637.4140	833.1947	1,470.608 7
Bio- CO2					
PM2.5 Total		0.000	0.0802	0.2684	0.3486
Exhaust PM2.5		0.000.0	0.0193	4.5700e- 003	0.0239
Fugitive PM2.5		0.000 0.0000 0.0000	0.0609	0.2638	0.3247
PM10 Total		0.0000	0.2315	0.9998	1.2313
Exhaust PM10	lay	0.0000	0.0202	4.9600e- 003	0.0251
Fugitive PM10	lb/day	0.000.0	0.2114	0.9948	1.2062
S02		0.000.0	6.0100e- 003	8.1900e- 003	0.0142
00		0.000.0	0.5038 6.0100e- 003	2.8755	3.3793
XON		0.000.0	1.4701	0.2359	1.7061
ROG		0.0000	0.0514	0.3276	0:3790
	Category	Hauling	Vendor	Worker	Total

Page 14 of 26

Date: 10/22/2021 7:52 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2023 Unmitigated Construction On-Site

CO2e		2,570.406	2,570.406
N2O			"
CH4	ау	6209.0	0.6079
Bio- CO2 NBio- CO2 Total CO2	lb/day	2,555.209 2,555.209 0.6079 9 9	2,555.209 2,555.209 9 9
NBio- CO2		2,555.209 9	2,555.209 9
Bio- CO2		1-8-8-8-8	
PM2.5 Total		0.6584	0.6584
Exhaust PM2.5		0.6584	0.6584
Fugitive PM2.5			
PM10 Total		0.6997	7669.0
Exhaust PM10	b/day	7669.0 7669.0	0.6997
Fugitive PM10	/qı		
S02		0.0269	0.0269
00		16.2440	16.2440
NOX		1.5728 14.3849 16.2440 0.0269	1.5728 14.3849 16.2440 0.0269
ROG		1.5728	1.5728
	Category	Off-Road	Total

Unmitigated Construction Off-Site

CO2e		0.0000	640.0771	818.2996	1,458.376 7
N20		0.000.0	.0907	0.0214	0.1120
CH4	ay	0.0000 0.0000 0.0000	5 6.1100e- 0 003	0.0204	0.0265
Total CO2	lb/day	0.000.0	612.9116 612.9116	811.4222 811.4222	1,424.333 8
Bio- CO2 NBio- CO2 Total CO2		0.0000	612.9116	811.4222	1,424.333
Bio- CO2					
PM2.5 Total		0.0000	6690.0	0.2681	0.3380
Exhaust PM2.5			9.0100e- 003	4.3000e- 003	0.0133
Fugitive PM2.5		0.0000 0.0000	0.0609	0.2638	0.3247
PM10 Total		0.0000 0.0000	0.2208	0.9995	1.2203
Exhaust PM10	b/day	0.0000	9.4200e- 003	4.6700e- 003	0.0141
Fugitive PM10)/q	0.0000	- 0.2114	0.9948	1.2062
S02		0.0000	5.7800e 003	3 7.9300e- (003	3.1101 0.0137
00		0.000.0	0.458	2.651	3.1101
×ON		0.0000	1.1434	0.2085	1.3519
ROG		0.0000	0.0345	0.3048	0.3392
	Category	Hauling	Vendor	Worker	Total

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

Page 15 of 26

Date: 10/22/2021 7:52 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2023

Mitigated Construction On-Site

	ROG	×ON	00	S02	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive Exhaust PM2.5		PM2.5 Total	Bio- CO2	NBio- CO2	Bio- CO2 NBio- CO2 Total CO2	CH4	NZO	CO2e
Category					lb/day	lay							lb/day	ay		
Off-Road	1.5728	1.5728 14.3849 16.2440 0.0269	16.2440	0.0269		7669.0 7669.0	2669.0		0.6584	0.6584 0.6584	0.0000	2,555.209 9	0.0000 2,555.209 2,555.209 0.6079	0.6079		2,570.406 1
Total	1.5728	1.5728 14.3849 16.2440 0.0269	16.2440	0.0269		0.6997	0.6997		0.6584	0.6584	0.0000	2,555.209 9	0.0000 2,555.209 2,555.209 9 9	0.6079		2,570.406

Mitigated Construction Off-Site

CO2e		0.0000	640.0771	818.2996	1,458.376 7
N20		0.0000	0.0907	0.0214	0.1120
CH4	ay	0.000.0	6.1100e- 003	0.0204	0.0265
Total CO2	lb/day	0.0000 0.0000 0.0000	612.9116	811.4222	1,424.333 8
NBio- CO2		0.0000	612.9116 612.9116	811.4222 811.4222	1,424.333 1,424.333 8 8 8
Bio-CO2 NBio-CO2 Total CO2					
PM2.5 Total		0.0000	6690.0	0.2681	0.3380
Exhaust PM2.5			9.0100e- 003	4.3000e- 003	0.0133
Fugitive PM2.5		0.0000 0.0000 0.0000	0.0609	0.2638	0.3247
PM10 Total		0.0000	0.2208	0.9995	1.2203
Exhaust PM10	łay	0.0000	9.4200e- 003	4.6700e- 003	0.0141
Fugitive PM10	lb/day	0.000.0	0.2114	0.9948	1.2062
S02		0.000.0	0.4589 5.7800e- 0.2114 003	7.9300e- 003	3.1101 0.0137
00		0.000.0	0.4589	2.6513	3.1101
NOX		0.0000	1.1434	0.2085	1.3519
ROG		0.0000 0.0000 0.0000 0.0000	0.0345	0.3048	0.3392
	Category	Hauling	Vendor	Worker	Total

Page 16 of 26

Date: 10/22/2021 7:52 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

3.5 Paving - 2023

Unmitigated Construction On-Site

	ROG	×ON	00	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive Exhaust PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2 NBio- CO2 Total CO2	NBio- CO2	Total CO2	CH4	N20	CO2e
Category					lb/day	day							lb/day	ay		
Off-Road	1.0327	10.1917	1.0327 10.1917 14.5842 0.0228	0.0228		0.5102	0.5102		0.4694 0.4694	0.4694		2,207.584 1	2,207.584 2,207.584 0.7140	0.7140		2,225.433 6
Paving	0.3930					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	1.4257	10.1917	1.4257 10.1917 14.5842 0.0228	0.0228		0.5102	0.5102		0.4694	0.4694		2,207.584	2,207.584 2,207.584	0.7140		2,225.433 6

Unmitigated Construction Off-Site

	ROG	XON	00	S02	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	Bio- CO2 NBio- CO2 Total CO2	Total CO2	CH4	NZO	CO2e
					lb/day	lay							lb/day	ay		
Hauling	0.000	0.0000	0.0000 0.0000 0.0000 0.0000 0.0000	0.0000	0.0000	0.0000	0.0000	0.0000 0.0000	0.0000	0.0000		0.0000	0.000.0 0.000.0	0.0000 0.0000	0.0000	0.0000
• • • • • • :	0.000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000.0	0.0000	0.0000	: : : : : : :	0.0000	0.000.0	0.000.0	0.0000	0.0000
• • • • • : :	0.0514	0.0351	0.4468 1.3400e- 003	1.3400e- 003	0.1677	7.9000e- 004	0.1685	0.0445	7.2000e- 004	0.0452		136.7566 136.7566	136.7566	36 3.4300e- 003	3.6000e- 003	137.9157
	0.0514	0.0514 0.0351	0.4468 1.3400e- 0.1677 003	1.3400e- 003	0.1677	7.9000e- 004	0.1685	0.0445	7.2000e- 004	0.0452		136.7566	136.7566	3.4300e- 003	3.6000e- 003	137.9157

Page 17 of 26

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

Date: 10/22/2021 7:52 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Paving - 2023

Mitigated Construction On-Site

	ROG	×ON	00	S02	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	Bio- CO2 NBio- CO2 Total CO2	Total CO2	CH4	N20	CO2e
Category					lb/day	lay							lb/day	ay		
Off-Road	1.0327	1.0327 10.1917 14.5842 0.0228	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694 0.4694	0.0000	2,207.584 1	0.0000 2,207.584 2,207.584 0.7140	0.7140		2,225.433 6
Paving	0.3930					0.0000	0.000.0		0.0000	0.0000			0.0000			0.0000
Total	1.4257	1.4257 10.1917 14.5842 0.0228	14.5842	0.0228		0.5102	0.5102		0.4694	0.4694	0.0000	0.0000 2,207.584 2,207.584	2,207.584	0.7140		2,225.433 6

Mitigated Construction Off-Site

			_		
CO2e		0.0000	0.0000	137.9157	137.9157
NZO		0.000.0	0.0000	e- 3.6000e- 003	3.6000e- 003
CH4	ay	0.0000 0.0000 0.0000	0.0000	3.4300e- 003	3.4300e- 003
Total CO2	lb/day	0.000 0.000.0	0.0000	136.7566	136.7566
NBio- CO2 Total CO2		0.0000	0.0000	136.7566	136.7566
Bio- CO2					
PM2.5 Total		00000	0.0000	0.0452	0.0452
Exhaust PM2.5		0.0000	0.0000	7.2000e- 004	7.2000e- 004
Fugitive PM2.5		0.0000 0.0000 0.0000	0.000.0	0.0445	0.0445
PM10 Total		0.000.0	0.000.0	0.1685	0.1685
Exhaust PM10	ı/day	0.0000	0.0000	7.9000e- 004	7.9000e- 004
Fugitive PM10	p/qı	0.0000	0.0000	0.1677	0.1677
SO2		0.000.0	0.0000 0.0000	1.3400e- 003	0.4468 1.3400e- 003
00		0.000.0	0.000.0	0.4468	0.4468
×ON		0.0000	0.0000 0.0000	0.0351 0.4468 1.3400e- 003	0.0514 0.0351
ROG		0.0000 0.0000 0.0000 0.0000	0.0000	0.0514	0.0514
	Category	Hauling	Vendor	Worker	Total

Page 18 of 26

Date: 10/22/2021 7:52 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Architectural Coating - 2023 Unmitigated Construction On-Site

		_		
CO2e		0.0000	281.8690	281.8690
N20				
CH4	ÁI		0.0168	0.0168
Fotal CO2	lb/day	0.000.0	281.4481	281.4481
NBio- CO2			281.4481 281.4481	281.4481 281.4481
Bio- CO2 NBio- CO2 Total CO2				
PM2.5 Total		00000	0.0708	0.0708
Exhaust PM2.5		0.000.0	0.0708	0.0708
Fugitive PM2.5				
PM10 Total		0.000.0	0.0708	0.0708
Exhaust PM10	lb/day	0.0000	0.0708	0.0708
Fugitive PM10)/q			
S02			2.9700e- 003	2.9700e- 003
00			1.8111	1.8111
XON			1.3030	1.3030
ROG		43.3216	0.1917 1.3030 1.8111 2.9700e- 003	43.5133 1.3030 1.8111 2.9700e-
	Category	D	Off-Road	Total

Unmitigated Construction Off-Site

CO2e		0.0000	0.0000	165.4988	165.4988
NZO			0.000.0	4.3200e- 16 003	4.3200e- 10
CH4	,	0.0000 0.0000	0.0000	4.1200e- 4 003	
Total CO2	lb/day	0.0000 0.0000	0.000.0	164.1079	164.1079 164.1079 4.1200e-
Bio- CO2 NBio- CO2 Total CO2		0.0000	0.0000	164.1079 164.1079 4.1200e- 003	164.1079
Bio- CO2					
PM2.5 Total		0.0000	0.0000	0.0542	0.0542
Exhaust PM2.5		0.000.0	0.000.0	8.7000e- 004	8.7000e- 004
Fugitive PM2.5		0.0000 0.0000	0.0000	0.0534	0.0534
PM10 Total		0.000.0	0.0000	0.2021	0.2021
Exhaust PM10	b/day	0.0000	0.0000	9.4000e- 004	9.4000e- 004
Fugitive PM10)/q	0.0000	0.0000	0.2012	0.2012
802		0.0000	0.0000	0.5362 1.6000e- 003	1.6000e- 003
00		0.000.0	0.0000	0.5362	0.5362
XON		0.0000	0.0000	0.0422	0.0422 0.5362 1.6000e- 0.2012 003
ROG		0.0000	0.0000	0.0616	0.0616
	Category	Hauling	Vendor	Worker	Total

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

Page 19 of 26

Date: 10/22/2021 7:52 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Architectural Coating - 2023

Mitigated Construction On-Site

	ROG	×ON	00	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Bio- CO2 NBio- CO2 Total CO2	CH4	N20	CO2e
Category					lb/day	day							lb/day	ay		
Archit. Coating # 43.3216	43.3216					0.0000	0.0000		0.0000 0.0000	0.0000			0.000.0			0.0000
Off-Road	0.1917 1.3030 1.8111 2.9700e-	1.3030	1.8111	2.9700e- 003		0.0708	0.0708		0.0708	0.0708		281.4481	0.0000 281.4481 281.4481	0.0168	 	281.8690
Total	43.5133	43.5133 1.3030 1.8111 2.9700e-	1.8111	2.9700e- 003		0.0708	0.0708		0.0708	0.0708	0.0000	281.4481	0.0000 281.4481 281.4481	0.0168		281.8690

Mitigated Construction Off-Site

CO2e		0.0000	0.0000	165.4988	165.4988	
N20		0.0000	0.0000	4.3200e- 003	4.3200e- 003	
CH4	ay	0.0000 0.0000	0.000.0	4.1200e- 003	4.1200e- 003	
Total CO2	lb/day	0.0000 0.0000	0.000.0	164.1079	164.1079	
Bio- CO2 NBio- CO2 Total CO2		0.0000	0.0000	164.1079 164.1079 4.1200e- 003	164.1079	
Bio- CO2						
PM2.5 Total		0.0000	0.0000	0.0542	0.0542	
Exhaust PM2.5		0.000.0	0.000.0	8.7000e- 004	8.7000e- 004	
Fugitive PM2.5		0.0000	0.000.0	0.0534	0.0534	
PM10 Total		0.000.0	0.000.0	0.2021	0.2021	
Exhaust PM10	b/day	ʻday	0.0000	0.0000	9.4000e- 004	9.4000e- 004
Fugitive PM10)/q	0.0000	0.0000	0.2012	0.2012	
S02		0.0000	0.0000	0.5362 1.6000e- (0.5362 1.6000e- 0.2012 003	
00		0.0000	0.0000	0.5362	0.5362	
NOX		0.0000	0.0000	0.0422	0.0422	
ROG		0.0000	0.0000	0.0616	0.0616	
	Category	Hauling	Vendor	Worker	Total	

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

Increase Transit Accessibility

Improve Pedestrian Network

O CO2e		3,414.944 3,414.944 0.1920 0.1767 3,472.395	4,353.751 4,353.751 0.2251 0.2154 4,423.563 9 4
4 N2O		20 0.176	51 0.21
O2 CH4	lb/day	44 0.192	51 0.22
)2 Total Co		14 i 3,414.9	51 4,353.7 9
Bio- CO2 NBio- CO2 Total CO2		3,414.94	4,353.75 9
		1-2-2-2-2	
PM2.5 Total		0.9841	1.2636
Exhaust PM2.5		0.0258	0.0324
Fugitive PM2.5		0.0275 3.6198 0.9584 0.0258 0.9841	4.6495 1.2312 0.0324
PM10 Total	lb/day	3.6198	4.6495
Exhaust PM10		0.0275	0.0346
Fugitive PM10		3.5923	4.6149
802		0.0330	0.0421
00		1.5169 2.2752 14.2277 0.0330 3.5923	1.6973 2.7590 17.2944 0.0421 4.6149
XON		2.2752	2.7590
ROG		1.5169	1.6973
	Category	Mitigated	Unmitigated

4.2 Trip Summary Information

	Aver	Average Daily Trip Rate	ate	Unmitigated	Mitigated
Land Use	Weekday	Saturday Sunday	Sunday	Annual VMT	Annual VMT
City Park	0.00	00.00	0.00		
Other Asphalt Surfaces	0.00	0.00	0.00		
Single Family Housing		639.18	572.85	2,133,806	1,661,006
Total	631.81	639.18	572.85	2,133,806	1,661,006

4.3 Trip Type Information

% ә	Pass-by	9	0
Trip Purpose %	Diverted	28	0
	Primary	99	0
	H-O or C-NW	19.00	0.00
7rip %	H-S or C-C	4	00.00
	H-W or C-W	33.00	00:00
	H-W or C-W H-S or C-C H-O or C-NW H-W or C-W H-S or C-C H-O or C-NW	9.90	9.90
Miles	H-S or C-C		8.40
	H-W or C-W	16.60	16.60
	Land Use	City Park 16.60	Other Asphalt Surfaces

Page 21 of 26

Date: 10/22/2021 7:52 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	Ŋ	
% əs	Pass-by	e
Trip Purpose %	Diverted	11
	Primary	98
	1-0 or C-NW H-W or C-W H-S or C-C H-O or C-NW	40.60
Trip %	H-S or C-C	19.20
	H-W or C-W	40.20
	H-O or C-NW	8.70
Miles	H-S or C-C	2.90
	H-W or C-W H-S or C-C	14.70
	Land Use	Single Family Housing

4.4 Fleet Mix

SBUS MH	0.537845 0.056225 0.173186 0.138405 0.025906 0.007191 0.011447 0.018769 0.000611 0.000309 0.023821 0.001097 0.005189	0.537845 0.056225 0.173186 0.138405 0.025906 0.007191 0.011447 0.018769 0.000611 0.000309 0.023821 0.001097 0.005189	0.537845 0.056225 0.173186 0.138405 0.025906 0.007191 0.011447 0.018769 0.000611 0.000309 0.023821 0.001097 0.005189
MCY 8	0.023821	0.023821	3405 0.025906 0.007191 0.011447 0.018769 0.000611 0.000309 0.023821 0.001097 (
NBUS	0.000309	0.000309	0.000309
OBUS	0.000611	0.018769 0.000611	0.000611
HHD	0.018769	0.018769	0.018769
MHD	0.011447	0.011447	0.011447
LHD2	0.007191	0.007191	0.007191
LHD1	0.025906	0.025906	0.025906
MDV	0.138405	0.138405	0.138405
LDT2	0.173186	0.537845 0.056225 0.173186	0.173186
LDT1	0.056225	0.056225	0.056225
PDA	0.537845	0.537845	0.537845 0.056225 0.173186 0.13
Land Use	City Park	Other Asphalt Surfaces	Single Family Housing

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

Exceed Title 24

Kilowatt Hours of Renewable Electricity Generated

		0	. #
C02e		580.6550	614.500
N2O		577.2248 577.2248 0.0111 0.0106 580.6550	0.0112
CH4	lay	0.0111	0.0117
Total CO2	lb/day	577.2248	610.8703
Bio- CO2 NBio- CO2 Total CO2		577.2248	610.8703 610.8703 0.0117 0.0112 614.5004
Bio- CO2			
PM2.5 Total		0.0366	0.0387
Exhaust PM2.5		0.0366	0.0387
Fugitive PM2.5			
PM10 Total		0.0366	0.0387
Exhaust PM10	lay	0.0366 0.0366	0.0387
Fugitive PM10	lb/day		
SO2		2.8900e- 003	3.0500e- 003
00		0.1924	0.2036
×ON		0.4522	0.0560 0.4785 0.2036 3.0500e-
ROG		0.0529 0.4522 0.1924 2.8900e-	0.0560
	Category		NaturalGas Unmitigated

Date: 10/22/2021 7:52 AM Page 22 of 26 CalEEMod Version: CalEEMod.2020.4.0

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Unmitigated

5e		8	8	900	004
C02e		0.0000	0.0000	614.5004	614.5004
N20		0.0000	0.0000	0.0112	0.0112
CH4	ay	0.0000	0.0000	0.0117	0.0117
Total CO2	lb/day	0.0000 0.0000 0.0000	0.000	610.8703	610.8703
Bio- CO2 NBio- CO2 Total CO2		0.000.0	0.000.0	610.8703	610.8703
Bio- CO2			<u>.</u>		
PM2.5 Total		0.0000	0.0000	0.0387	0.0387
Exhaust PM2.5		0.0000	0.0000	0.0387	0.0387
Fugitive PM2.5					
PM10 Total		0.0000	0.0000	0.0387	0.0387
Exhaust PM10	lb/day	0.0000	0.0000	0.0387	0.0387
Fugitive PM10	/QI				
S02		0.0000	0.0000	3.0500e- 003	3.0500e- 003
00		0.0000	0.0000	0.2036	0.2036
×ON		0.000.0	0.000.0	0.4785	0.4785
ROG		0.0000 0.0000 0.0000		0.0560	0.0560
NaturalGa s Use	kBTU/yr	0	0	5192.4	
	Land Use	City Park	Other Asphalt Surfaces	Single Family Housing	Total

Page 23 of 26 CalEEMod Version: CalEEMod.2020.4.0

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

Date: 10/22/2021 7:52 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Mitigated

CO2e		0.0000	0.0000	580.6550	580.6550
N2O		0.0000 0.0000 0.0000 0.0000	0.0000	0.0106	0.0106
CH4	lay	0.0000	0.0000	0.0111	0.0111
Total CO2	lb/day	0.000.0	0.0000	577.2248	577.2248
Bio- CO2 NBio- CO2 Total CO2		0.0000	0.0000	577.2248	577.2248
Bio- CO2		1-2-2-2-	: : : : : : :	 	
PM2.5 Total		0.0000 0.0000	0.0000	0.0366	9980'0
Exhaust PM2.5		0.0000	0.0000	0.0366	0.0366
Fugitive PM2.5					
PM10 Total		0.0000	0.0000	0.0366	9980'0
Exhaust PM10	lb/day	0.000.0 0.000.0	0.0000	0.0366	0.0366
Fugitive PM10	/qı				
SO2		0.0000	0.0000	2.8900e- 003	2.8900e- 003
00		0.0000	0.0000	0.1924 2.8900e- 003	0.1924
NOx		0.0000 0.0000 0.0000	0.0000	0.4522	0.4522
ROG		0.0000	0.0000	0.0529	0.0529
NaturalGa s Use	kBTU/yr	0	0	4.90641	
	Land Use	City Park	Other Asphalt Surfaces	Single Family Housing	Total

6.0 Area Detail

6.1 Mitigation Measures Area

No Hearths Installed

Date: 10/22/2021 7:52 AM Page 24 of 26 CalEEMod Version: CalEEMod.2020.4.0

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

CO2e		10.1926	3 9.5500e- 0.0000 10.1926 003
NZO		0.0000 9.9538 9.95300e- 0.0000 10.1926 003	0.0000
CH4	lay	9.5500e- 003	9.5500e- 003
Total CO2	lb/day	9.9538	3 9.9538
Bio- CO2 NBio- CO2 Total CO2		9.9538	9.9538
Bio- CO2		0.0000	0.0000
PM2.5 Total		0.0306	0.0306
Exhaust PM2.5		0.0306	0.0306
Fugitive PM2.5			
PM10 Total		0.0306 0.0306	0.0306
Exhaust PM10	tay	0.0306	0.0306
Fugitive PM10	lb/day		
S02		2.9000e- 004	2.9000e- 004
00		5.5256	5.5256
×ON		0.0637	0.0637
ROG		3.0778 0.0637 5.5256 2.9000e-	3.0778 0.0637 5.5256 2.9000e- 004
	Category	Mitigated	Unmitigated

6.2 Area by SubCategory

Unmitigated

CO2e		0.0000	0.0000	0.0000	10.1926	10.1926
N20				0.0000		0.0000
CH4	ay			0.0000	9.5500e- 003	9.5500e- 003
Total CO2	lb/day	0.000.0	0.000.0	0.0000	9.9538	9.9538
Bio- CO2 NBio- CO2 Total CO2			 	0.0000	9.9538	9.9538
Bio- CO2				0.0000		0.0000
PM2.5 Total		0.0000	0.0000	0.0000	0.0306	0.0306
Exhaust PM2.5		0.000.0	0.000.0	0.000.0	0.0306	0.0306
Fugitive PM2.5						
PM10 Total		0.000.0	0.0000	0.0000	0.0306	0.0306
Exhaust PM10	day	0.0000	0.0000	0.0000	0.0306	0.0306
Fugitive PM10	lb/day					
S02				0.0000	2.9000e- 004	2.9000e- 004
00				0.0000	5.5256	5.5256
NOx				0.0000	0.0637	0.0637
ROG		0.2374	2.6742	0.0000	0.1662	3.0778
	SubCategory	Architectural Coating	Consumer Products	Hearth	Landscaping	Total

Page 25 of 26

Date: 10/22/2021 7:52 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

6.2 Area by SubCategory

Mitigated

C02e		0.0000	0.0000	0.0000	10.1926	10.1926
N20				0.0000		0.0000
CH4	ay			0.0000	9.5500e- 003	9.5500e- 003
Total CO2	lb/day	0.000.0	0.0000	0.0000	9.9538	9.9538
NBio- CO2 Total CO2				0.0000	9.9538	9.9538
Bio- CO2			 	0.000.0		0.0000
PM2.5 Total		0.000.0	0.000	0.000	0.0306	0.0306
Exhaust PM2.5		0.000.0	0.000.0	0.000.0	0.0306	0.0306
Fugitive PM2.5						
PM10 Total		0.0000	0.0000	0.0000	0.0306	0.0306
Exhaust PM10	ı/day	0.0000	0.0000	0.0000	0.0306	0.0306
Fugitive PM10	o/qı					
SO2				0.0000	2.9000e- 004	2.9000e- 004
co				0.000.0	5.5256	5.5256
XON				0.0000	0.0637	0.0637
ROG		0.2374	2.6742	0.000	0.1662	3.0778
	SubCategory	Architectural Coating	Consumer Products	Hearth	Landscaping	Total

7.0 Water Detail

7.1 Mitigation Measures Water

Install Low Flow Bathroom Faucet

Install Low Flow Kitchen Faucet

Install Low Flow Toilet

Install Low Flow Shower

Use Water Efficient Irrigation System

Page 26 of 26

Date: 10/22/2021 7:52 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

8.0 Waste Detail

8.1 Mitigation Measures Waste

Institute Recycling and Composting Services

9.0 Operational Offroad

Fuel Type	
Load Factor	
Horse Power	
Days/Year	
Hours/Day	
Number	
Equipment Type	

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Fuel Type	
Load Factor	
Horse Power	
Hours/Year	
Hours/Day	
Number	
Equipment Type	

Boilers

Fuel Type	Boiler Rating	Heat Input/Year	Heat Input/Day	Number	Equipment Type

User Defined Equipment

Number	
Equipment Type	

11.0 Vegetation

APPENDIX B

EMFAC2017 Model Printouts

EMFAC2017 (v1.0.2) Emissions Inventory

Region Type: Air Basin

Region: SOUTH COAST Calendar Year: 2022

Season: Annual

Vehicle Classification: EMFAC2007 Categories

Units: miles/day for VMT, trips/day for Trips, tons/day for Emissions, 1000 gallons/day for Fuel Consumption. Note 'day' in the unit is operation day.

1.875688287	7989.700531	1003.18171	3339.886942	583.2281345	110.1260053	54.92216124	2704.447563	62.96118679	259.391887	47.77312679	11.26572543	18.40085629
1544.534	30101253	3305301	10234301	2552988	432791.1	577512.7	7077024	3410.439	495865	116687.7	10252.29	3808.584
7790.40352	246404319.3	26563674.69	82381240.23	6138928.512	1009215.767	1994249.265	54105469.86	324253.0827	1316472.619	240794.901	102707.6059	952.146 89255.99818 3808.584
77.19581	6370883	716397.4	2182002	171358.6	29049.29	288756.3	1530646	34090.76	24783.34	5832.051	2563.073	952.146
Aggregater Aggregater GAS	Aggregater Aggregater GAS	Aggregater Aggregater GAS	Aggregater Aggregater GAS	Aggregater Aggregater GAS	Aggregater Aggregater GAS	Aggregater Aggregater GAS	Aggregater Aggregater GAS	Aggregater Aggregater GAS	Aggregater Aggregater GAS	Aggregater Aggregater GAS	Aggregater Aggregater GAS	Aggregater Aggregater GAS
2022 HHDT	2022 LDA	2022 LDT1	2022 LDT2	2022 LHDT1	2022 LHDT2	2022 MCY	2022 MDV	2022 MH	2022 MHDT	2022 OBUS	2022 SBUS	2022 UBUS
SOUTH CO.	SOUTH CO.	SOUTH CO.	SOUTH CO.	SOUTH CO,	SOUTH CO.	SOUTH CO,	SOUTH CO,	SOUTH CO.	SOUTH CO,	SOUTH CO,	SOUTH CO,	SOUTH CO,
	2022 HHDT Aggregater Aggregater GAS 77.19581 7790.40352 1544.534	2022 HHDT Aggregater Aggregater GAS 77.19581 7790.40352 1544.534 2022 LDA Aggregater Aggregater GAS 6370883 246404319.3 30101253	2022 HHDT Aggregater Aggregater GAS 77.19581 7790.40352 1544.534 2022 LDA Aggregater Aggregater GAS 6370883 246404319.3 30101253 2022 LDT1 Aggregater Aggregater GAS 716397.4 26563674.69 3305301	2022 HHDT Aggregatec Aggregatec GAS 77.19581 7790.40352 1544.534 2022 LDA Aggregatec Aggregatec GAS 6370883 246404319.3 30101253 2022 LDT1 Aggregatec Aggregatec GAS 716397.4 26563674.69 3305301 2022 LDT2 Aggregatec Aggregatec GAS 2182002 82381240.23 10234301	2022 HHDT Aggregater Aggregater GAS 77.19581 7790.40352 1544.534 2022 LDA Aggregater Aggregater GAS 6370883 246404319.3 30101253 2022 LDT1 Aggregater Aggregater GAS 716397.4 26563674.69 3305301 2022 LDT2 Aggregater Aggregater GAS 2182002 82381240.23 10234301 2022 LHDT1 Aggregater Aggregater GAS 171358.6 6138928.512 2552988	2022 HHDT Aggregater Aggregater GAS 77.19581 7790.40352 1544.534 2022 LDA Aggregater Aggregater GAS 6370883 246404319.3 30101253 2022 LDT Aggregater Aggregater GAS 716397.4 26563674.69 3305301 2022 LDT Aggregater Aggregater GAS 2182002 82381240.23 10234301 2022 LHDT Aggregater Aggregater GAS 171358.6 6138928.512 2552988 2022 LHDT Aggregater Aggregater GAS 29049.29 1009215.767 432791.1	2022 HHDT Aggregater Aggregater GAS 77.19581 7790.40352 1544.534 2022 LDA Aggregater Aggregater GAS 6370883 246404319.3 30101253 2022 LDT1 Aggregater Aggregater GAS 716397.4 26563674.69 3305301 2022 LDT2 Aggregater Aggregater GAS 2182002 82381240.23 10234301 2022 LHDT1 Aggregater Aggregater GAS 171358.6 6138928.512 2552988 2022 LHDT2 Aggregater Aggregater GAS 29049.29 1009215.767 432791.1 2022 LHDT Aggregater Aggregater GAS 288756.3 1994249.265 577512.7	2022 HHDT Aggregater Aggregater GAS 77.19581 7790.40352 1544.534 2022 LDA Aggregater Aggregater GAS 6370883 246404319.3 30101253 2022 LDT Aggregater Aggregater GAS 716397.4 26563674.69 3305301 2022 LDT Aggregater Aggregater GAS 171358.6 6138928.512 2552988 2022 LHDT Aggregater Aggregater GAS 29049.29 1009215.767 432791.1 2022 MCY Aggregater Aggregater GAS 288756.3 1994249.265 577512.7 2022 MDV Aggregater Aggregater GAS 1530646 54105469.86 7077024	2022 HHDT Aggregater Aggregater GAS 77.19581 7790.40352 1544.534 2022 LDA Aggregater Aggregater GAS 6370883 246404319.3 30101253 2022 LDT Aggregater Aggregater GAS 716397.4 26563674.69 3305301 2022 LDT2 Aggregater Aggregater GAS 171358.6 6138928.512 2552988 2022 LHDT Aggregater Aggregater GAS 29049.29 1009215.767 432791.1 2022 LHDT Aggregater Aggregater GAS 288756.3 1994249.265 577512.7 2022 MCY Aggregater Aggregater GAS 1530646 54105469.86 7077024 2022 MH Aggregater Aggregater GAS 3410.439 3410.439	2022 HHDT Aggregater Aggregater GAS 77.19581 7790.40352 1544.534 2022 LDA Aggregater Aggregater GAS 6370883 246404319.3 30101253 2022 LDT1 Aggregater Aggregater GAS 716397.4 26563674.69 3305301 2022 LDT2 Aggregater Aggregater GAS 171358.6 6138928.512 2552988 2022 LHDT2 Aggregater Aggregater GAS 29049.29 1009215.767 432791.1 2022 LHDT2 Aggregater Aggregater GAS 288756.3 1994249.265 577512.7 2022 MCY Aggregater Aggregater GAS 1530646 54105469.86 7077024 2022 MHD Aggregater Aggregater GAS 34090.76 324253.0827 3410.439 2022 MHDT Aggregater Aggregater GAS 24783.34 1316472.619 495865	2022 HHDT Aggregater Aggregater GAS 77.19581 7790.40352 1544.534 2022 LDA Aggregater Aggregater GAS 716397.4 26563674.69 30001253 2022 LDTJ Aggregater Aggregater GAS 2182002 82381240.23 10234301 2022 LDTJ Aggregater Aggregater GAS 171358.6 6138928.512 2552988 2022 LHDTJ Aggregater Aggregater GAS 29049.29 1009215.767 432791.1 2022 LHDT Aggregater Aggregater GAS 288756.3 1994249.265 577512.7 2022 MCY Aggregater Aggregater GAS 1530646 54105469.86 7077024 2022 MH Aggregater Aggregater GAS 34090.76 324253.0827 3410.439 2022 MHDT Aggregater Aggregater GAS 24783.34 1316472.619 495865 2022 OBUS Aggregater Aggregater GAS 5832.051 240794.901 116687.7	2022 HHDT Aggregater Aggregater GAS 77.19581 7790.40352 1544.534 2022 LDA Aggregater Aggregater GAS 716397.4 26563674.69 3305301 2022 LDTJ Aggregater Aggregater GAS 2182002 82381240.23 10234301 2022 LHDTJ Aggregater Aggregater GAS 171358.6 6138928.512 2552988 2022 LHDTJ Aggregater Aggregater GAS 29049.29 1009215.767 432791.1 2022 LHDT Aggregater Aggregater GAS 288756.3 1994249.265 577512.7 2022 MCY Aggregater Aggregater GAS 34090.76 54105469.86 7077024 2022 MH Aggregater Aggregater GAS 34090.76 324253.0827 3410.439 2022 MHDT Aggregater Aggregater GAS 24783.34 1316472.619 495865 2022 BUS Aggregater Aggregater GAS 5832.051 240794.901 116687.7

16,187 1,000 gall per day 420678372 vehicle miles per day (All Categories)

16,187,162 gallons per day

Fleet Avg Miles per gallon 26.0

EMFAC2017 (v1.0.2) Emissions Inventory

Region Type: Air Basin

Region: SOUTH COAST Calendar Year: 2022

Season: Annual

Vehicle Classification: EMFAC2007 Categories

Units: miles/day for VMT, trips/day for Trips, tons/day for Emissions, 1000 gallons/day for Fuel Consumption. Note 'day' in the unit is operation day.

Region	Calendar Y Vehicle C	Region Calendar Y Vehicle Cat Model Yea Speed Fuel	Population VMT		Trips	Fuel Consumption
SOUTH CO	2022 HHDT	Aggregater Aggregater DSL	98507.93	11795119.18	98507.93 11795119.18 994224.5278 1762.986535	1762.986535
SOUTH CO.		Aggregater Aggregater DSL	57443	2304136.238	57443 2304136.238 272823.0302 47.39159146	47.39159146
SOUTH CO		Aggregater Aggregater DSL	378.1209	8809.098622	378.1209 8809.098622 1319.110799 0.391172549	0.391172549
SOUTH CO.		Aggregater Aggregater DSL	13854.2	592642.9638	13854.2 592642.9638 68308.95137 16.65070839	16.65070839
SOUTH CO		Aggregater Aggregater DSL	115788.9	4681447.455	115788.9 4681447.455 1456478.318 217.1134019	217.1134019
SOUTH CO		Aggregater Aggregater DSL	45909.32	1809192.293	45909.32 1809192.293 577481.5034 92.8866097	92.8866097
SOUTH CO		Aggregater Aggregater DSL	32417.61	1305872.927	32417.61 1305872.927 158948.6889 47.80332863	47.80332863
SOUTH CO.		Aggregater Aggregater DSL	12198.84	117488.268	12198.84 117488.268 1219.883938 11.12023591	11.12023591
SOUTH CO.		Aggregater Aggregater DSL	119796	7716034.126	119796 7716034.126 1201941.571 720.1602731	720.1602731
SOUTH CO.		Aggregater Aggregater DSL	4149.674	316404.315	4149.674 316404.315 40441.57981 37.45917989	37.45917989
SOUTH CO.	2022 SBUS	Aggregater Aggregater DSL	6354.465	200786.3158	6354,465 200786.3158 73329.64442 26.4174734	26.4174734
SOUTH CO.		Aggregater Aggregater DSL	14.14142	1478.085683	14.14142 1478.085683 56.56567323 0.246796198	0.246796198

Diesel Truck (HHDT, MDV, MHDT) vehicle miles per day 20,817,026

2,531 1,000 gall per day 2,530,950 gallons per day

Diesel Truck Fleet Avg Miles per gallon

8.2

APPENDIX C

CalEEMod Model Annual Printouts

Page 1 of 32

Date: 10/22/2021 7:49 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied TTM No. 38237 Discovery Residential

Riverside-South Coast County, Annual

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Other Asphalt Surfaces	3.00	Acre	3.00	130,680.00	0
City Park		Acre	0.56	0.56 24,393.60	0
Single Family Housing	67.00	Dwelling Unit 5.24 132,660.00	5.24	132,660.00	192

1.2 Other Project Characteristics

recipitation Freq (Days) 28	11 Year 2024
2.4 Precipitatio	Operational Year
Wind Speed (m/s)	
Urban	10
Urbanization	Climate Zone

Utility Company Southern California Edison

CO2 Intensity 390.98 (lb/MWhr)	CH4 Intensity (Ib/MWhr)	0.033	N2O Intensity (Ib/MWhr)	0.004

1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - Total Project Site = 8.8 acres

Construction Phase -

Trips and VMT - 6 vendor trips per day added to Site Preparation and Grading phases to account for water truck emissions

Vehicle Trips - Weekday trip rate set to match Traffic Scoping Agreement

Woodstoves - No Woodstoves or fireplaces.

Construction Off-road Equipment Mitigation - Water Exposed Area 3x per day selected to account for SCAQMD Rule 403 minimum requirements

Mobile Land Use Mitigation - Improve Pedestrian Network onsite and connecting offsite. Distance to nearest bus stop 0.12 mile.

Area Mitigation -

Energy Mitigation - Exceed Title 24 by 7% selected to account for 2019 Title 24. 382,188 kWh generated per year from PV panels

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Water Mitigation - Install low-flow fixtures and use water-efficient irrigation selected to account for Title 24 Part 11 min requirements

Waste Mitigation - 50% reduction in waste selected to account for AB 341

New Value	0.00	67.00	0.00	132,660.00	5.24	6.00	6.00	0.00	0.00	0.00	9.43	0.00	0.00
Default Value	56.95	6.70	3.35	120,600.00	21.75	0.00	0.00	1.96	2.19	0.78	9.44	3.35	3.35
Column Name	NumberGas	NumberNoFireplace	NumberWood	LandUseSquareFeet	LotAcreage	VendorTripNumber	VendorTripNumber	ST_TR	SU_TR	WD_TR	WD_TR	NumberCatalytic	NumberNoncatalytic
Table Name	tblFireplaces	tblFireplaces	tblFireplaces	tblLandUse	tblLandUse	tblTripsAndVMT	tblTripsAndVMT	tblVehicleTrips	tblVehicleTrips	tblVehicleTrips	tblVehicleTrips	tblWoodstoves	tblWoodstoves

2.0 Emissions Summary

Page 3 of 32

Date: 10/22/2021 7:49 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.1 Overall Construction Unmitigated Construction

CO2e		65.4467	429.4000	429.4000						
N20		8.3000e- 004	0.0113	0.0113						
CH4	'yr	0.0168	0.0700							
Total CO2	IM	MT/s	MT/yr	MT/y	MΤΛ	MΤ/չ	MT/s	64.7797	424.2890	424.2890
Bio- CO2 NBio- CO2 Total CO2			0.0000 64.7797 64.7797 0.0168 8.3000e-	0.0000 424.2890 424.2890	0.0000 424.2890 424.2890 0.0700					
Bio- CO2		0.0000	0.000							
PM2.5 Total		0.1073	0.1155	0.1155						
Exhaust PM2.5		0.0217 0.2000 0.0872 0.0201 0.1073	0.0793	0.0793						
Fugitive PM2.5		0.0872	0.0362	0.0872						
PM10 Total		0.2000	0.2185	0.2185						
Exhaust PM10	s/yr	0.0217	0.0844	0.0844						
Fugitive PM10	tons/yr	0.1783	0.1342	0.1783						
S02		7.3000e- 004	4.7800e- 003	4.7800e- 003						
00			0.3602	2.3181	2.3181					
×ON			0.4652	1.8461	1.8461 2.3181 4.7800e- 003					
ROG		0.0467 0.4652 0.3602 7.3000e- 0.1783 0.4652	0.6592	0.6592						
	Year	2022	2023	Maximum						

Mitigated Construction

C02e		65.4466	429.3996	429.3996				
N20		8.3000e- 004	0.0113	0.0113				
CH4	ʻyr	0.0168	0.0700	0.0700				
Total CO2	M	MT/yr	/TM	M	MT	64.7796	424.2887	424.2887
Bio- CO2 NBio- CO2 Total CO2		0.0000 64.7796 64.7796 0.0168 8.3000e-	0.0000 424.2887 424.2887 0.0700	0.0000 424.2887 424.2887				
Bio- CO2		0.0000	0.0000					
PM2.5 Total		0.0556	0.1155	0.1155				
Exhaust PM2.5		0.0201	0.0793	0.0793				
Fugitive PM2.5	tons/yr	0.0217 0.0968 0.0355 0.0201	0.0362	0.0362				
PM10 Total		0.0968	0.2185	0.2185				
Exhaust PM10		0.0217	0.0844	0.0844				
Fugitive PM10		0.0751	0.1342	0.1342				
S02		7.3000e- 004	2.3181 4.7800e- 003	4.7800e- 003				
00			0.3602	2.3181	2.3181			
NOx		0.4652	1.8461	1.8461 2.3181 4.7800e- 0.1342 003				
ROG		0.0467	0.6592	0.6592				
	Year	2022	2023	Maximum				

Page 4 of 32 CalEEMod Version: CalEEMod.2020.4.0

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

Date: 10/22/2021 7:49 AM

-	C02e	00'0
Applie	N20	00'0
icle Rule	СН4	0.00
\FE Veh	Total CO2	00.0
or the S/	NBio-CO2	00:0
EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied	PM2.5 Bio- CO2 NBio-CO2 Total CO2 Total	00:0
icle to A	PM2.5 Total	23.21
uty Vehi	Fugitive Exhaust PM2.5	00'0
e Light D	Fugitive PM2.5	41.91
Gasoline	PM10 Total	24.65
tors for	Exhaust PM10	0.00
nent Fac	Fugitive PM10	33.02
Adjustn	S02	0.00
ff-Model	00	0.00
MFAC O	NOX	0.00
Ш	ROG	0.00
		Percent Reduction

er)					
Maximum Mitigated ROG + NOX (tons/quarter)	0.5784	0.5670	0.5720	0.4777	0.5784
Maximum Unmitigated ROG + NOX (tons/quarter)	0.5784	0.5670	0.5720	0.4777	0.5784
End Date	1-16-2023	4-16-2023	7-16-2023	9-30-2023	Highest
Start Date	10-17-2022	1-17-2023	4-17-2023	7-17-2023	
Quarter	1	2	3	4	

2.2 Overall Operational **Unmitigated Operational**

CO2e		1.1558	196.8629	724.7376	39.6136	22.8462	985.2161		
N20		0.000.0	2.8200e- 1 003	0.0349	0.000.0	3.5300e- 003	0.0413		
CH4	ΜΤ/yr	MT/yr	MT/yr	1.0800e- 003	9.9300e- 003	0.0362	0.9450	0.1437	1.1359
Total CO2				MT/y	MT/y	1.1287	195.7737	713.4240	15.9896
Bio- CO2 NBio- CO2 Total CO2		1.1287	195.7737	713.4240 713.4240	0.0000	16.8175	927.1440		
Bio- CO2		0.0000	0.0000	0.0000	15.9896	1.3849	17.3745		
PM2.5 Total		3.8300e- 003	7.0600e- 003		0.0000	0.0000	0.2322		
Exhaust PM2.5		3.8300e- 003	7.0600e- 003	5.7600e- 003	0.000.0	0.000.0	0.0167		
Fugitive PM2.5			 	0.2156			0.2156		
PM10 Total			7.0600e- 003	0.8132	0.0000	0.0000	0.8240		
Exhaust PM10	s/yr	3.8300e- 003	7.0600e- 003	6.1400e- 003	0.0000	0.0000	0.0170		
Fugitive PM10	tons/yr			0.8070			0.8070		
S02			5.6000e- 004	7.6000e- 0 003			8.2000e- 003		
00		0.6907	0.0372	3.1780			3.9058		
NOx		7.9600e- 003	0.0873	0.4934		 	0.5887		
ROG		0.5521	0.0102	0.3052			0.8676		
	Category	Area	Energy	Mobile	Waste	Water	Total		

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

Page 5 of 32

Date: 10/22/2021 7:49 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Mitigated Operational

							_	
CO2e		1.1558	122.9634	568.7919	19.8068	19.2182	731.9361	
N20		0.0000	2.0300e- 003	0.0286	0.0000	2.8300e- 003	0.0335	
CH4	MT/yr	'yr	1.0800e- 003	4.0800e- 003	0.0308	0.4725	0.1150	0.6235
Total CO2		1.1287		559.4894	7.9948	15.4984	706.3691	
Bio- CO2 NBio- CO2 Total CO2		1.1287	122.2578 122.2578	559.4894	0.0000	14.3905	697.2664	
Bio- CO2		0.0000	0.000	0.0000	7.9948	1.1079	9.1027	
PM2.5 Total		3.8300e- 003	6.6700e- 003	0.1724	0.0000	0.0000	0.1829	
Exhaust PM2.5		3.8300e- 003	6.6700e- 003	4.5700e- 003	0.0000	0.000.0	0.0151	
Fugitive PM2.5	slyr				0.1678	 		0.1678
PM10 Total		3.8300e- 003	6.6700e- 003	0.6331	0.0000	0.0000	0.6436	
Exhaust PM10		3.8300e- 003	6.6700e- 003	4.8800e- 003	0.0000	0.000	0.0154	
Fugitive PM10	tons/yr			0.6282			0.6282	
S02		4.0000e- 005	5.3000e- 004	5.9600e- 003			6.5300e- 003	
00		0.6907	0.0351	2.6072			3.3330	
×ON		7.9600e- 003	0.0825	0.4063			0.4967	
ROG		0.5521		0.2729			0.8347	
	Category	Area	<u></u>	Mobile	Waste	Water	Total	

CO2e	25.71
N20	18.87
CH4	45.11
Total CO2	25.21
NBio-CO2	24.79
Bio- CO2 NBio-CO2 Total CO2	47.61
PM2.5 Total	21.25
Exhaust PM2.5	9.49
Fugitive Exhaust PM2.5	22.16
PM10 Total	21.90
Exhaust PM10	69'6
Fugitive PM10	22.16
802	20.37
00	14.67
NOx	15.63
ROG	3.79
	Percent Reduction

3.0 Construction Detail

Construction Phase

ion			
Phase Description			
Num Days	10	20	230
Num Days Num Days Week	2	5	5
End Date	11/18/2022	12/16/2022	12/18/2022 11/3/2023 5 230
Start Date	11/7/2022	11/20/2022	12/18/2022
Phase Type	Site Preparation	Grading	Building Construction
Phase Name	Site Preparation	Grading	Building Construction
Phase Number	7	2	3

Date: 10/22/2021 7:49 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4	Paving	Paving	11/4/2023	12/1/2023	5	20	
2	Architectural Coating	Architect	12/2/2023	12/29/2023	5	20	ural Coating 12/2/2023 12/29/2023 5 20

Acres of Grading (Site Preparation Phase): 15

Acres of Grading (Grading Phase): 20

Acres of Paving: 3

Residential Indoor: 268,637; Residential Outdoor: 89,546; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 7,841 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
			6		
Site Preparation	Rubber Tired Dozers	e e	8.00	247	7.0
Site Preparation	Tractors/Loaders/Backhoes	4	8.00	26	0.0
Grading	Excavators		8.00	158	0.0
Grading	Graders		8.00	187	0.7
Grading	Rubber Tired Dozers		8.00	247	0.7
Grading	Tractors/Loaders/Backhoes	С	8.00	26	0.0
Building Construction	Cranes		7.00	231	0.2
Building Construction	Forklifts	С	8.00	68	0.2
Building Construction	Generator Sets		8.00	84	0.7
Building Construction	Tractors/Loaders/Backhoes	С	7.00	26	0.0
Building Construction	Welders	_	8.00	46	0.2
Paving	Pavers	2	8.00	130	0.7
Paving	Paving Equipment	2	8.00	132	0.3
Paving	Rollers	2	8.00	80	Ö.
Architectural Coating	Air Compressors	1	00.9	78	0.7

.38

.37 .29 .20 .37 .45 .42 .36

Page 7 of 32

Date: 10/22/2021 7:49 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

	EMFAC Off-Model Adjustment F	del Adjustme	ent Factors	for Gasolin	e Light Duty	Vehicle to	Account for	Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied	nicle Rule A	pplied
Phase Name	Offroad Equipment Worker Trip Count Number	Worker Trip Number	Ven N	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	dor Trip Hauling Trip Worker Trip Vendor Trip Hauling Trip Worker Vehicle umber Length Length Class		Vendor Hauling Vehicle Class
Site Preparation		18.00	00.9	00:00	14.70			20.00 LD_Mix	HDT_Mix HHDT	HHDT
Grading	9	6 15.00	90.9	0.00	14.70	9.90		20.00 LD_Mix	HDT_Mix HHDT	HHDT

3.1 Mitigation Measures Construction

HHDT HEDT HET I 王

HDT_Mix

HDT_Mix

6.90 6.90

14.70 14.70 14.70

6.90

0.00 0.00 0.00

33.00

89.00 15.00

Building Construction Grading

0.00

0.00

18.00

Architectural Coating Paving

HDT_Mix HDT_Mix

20.00 LD_Mix 20.00 LD_Mix 20.00 LD_Mix 20.00 LD_Mix

Water Exposed Area

3.2 Site Preparation - 2022

Unmitigated Construction On-Site

C02e		0.0000	16.8549	16.8549
N20		0.000.0	0.0000	0.0000
CH4	yr		5.4100e- 003	5.4100e- 003
Total CO2	MT/yr	0.0000	16.7197	16.7197
NBio- CO2		0.0000	0.0000 16.7197 16.7197 5.4100e-	16.7197
Bio- CO2 NBio- CO2 Total CO2		0.0000 0.0000	0.000.0	0.0000
PM2.5 Total		0.0505	7.4200e- 003	0.0579
Exhaust PM2.5		0.0000	7.4200e- 003	7.4200e- C
Fugitive PM2.5		0.0505	 	0.0505
PM10 Total			8.0600e- 003	0.1064
Exhaust PM10	ns/yr	0.0000	8.0600e- 8.0600e- 003 003	8.0600e- 003
Fugitive PM10	tons	0.0983		0.0983
S02			1.9000e- 004	1.9000e- 004
00			0.0985	0.0985
×ON			0.0159 0.1654 0.0985 1.9000e-	0.0159 0.1654 0.0985 1.9000e- 0.0983 004
ROG			0.0159	0.0159
	Category	Fugitive Dust	Off-Road	Total

Page 8 of 32 CalEEMod Version: CalEEMod.2020.4.0

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

Date: 10/22/2021 7:49 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Site Preparation - 2022
Unmitigated Construction Off-Site

		<u> </u>			
CO2e		0.0000	0.5487	0.7892	1.3379
N20		0.0000	8.0000e- 005	2.0000e- 005	1.0000e- 004
CH4	/yr	0.0000	1.0000e- 005	2.0000e- 005	3.0000e- 005
Total CO2	MT/yr	0.000.0	0.5254	0.7822	1.3076
Bio- CO2 NBio- CO2 Total CO2		0.0000 0.0000 0.0000 0.0000 0.0000	0.5254	0.7822	1.3076
Bio- CO2			0.0000	0.000.0	0.000.0
PM2.5 Total		0.0000	7.0000e- 005	2.7000e- 004	3.4000e- 004
Exhaust PM2.5		0.0000	2.0000e- 005	0.0000	2.0000e- 005
Fugitive PM2.5		0.000.0	5.0000 005	э- 2.6000e- 004	3.1000e- 004
PM10 Total		0.000.0	2.1000e- 004	9.9000e- 2. 004	1.2000e- 003
Exhaust PM10	ons/yr	0.0000	2.0000e- 005	1.0000e- 005	3.0000e- 005
Fugitive PM10	tons	0.0000	1.9000e- 004	9.9000e- 004	1.1800e- 003
SO2		0.0000	1.0000e- 005	1.0000e- 005	2.0000e- 005
00		0.0000	4.5000e- 004	3.0700e- 003	1.5700e- 3.5200e- 003 003
×ON		0.0000 0.0000 0.0000 0.0000	5.0000e- 1.3300e- 4.5000e- 1.0000e- 1.9000e- 005 003 004 005 004	2.4000e- 004	1.5700e- 003
ROG		0.0000	5.0000e- 005	3.1000e- 004	3.6000e- 004
	Category	Hauling	• • • • • •	Worker	Total

Mitigated Construction On-Site

CO2e		0.0000	16.8549	16.8549
N20		0.0000	0.0000	0.0000
CH4	'yr	0.000.0	5.4100e- 003	5.4100e- 0 003
Total CO2	MT/yr	0.000.0	16.7197	16.7197
NBio- CO2		0.0000 0.0000 0.0000 0.0000 0.0000	0.0000 16.7197 16.7197 5.4100e- 003	16.7197 16.7197
Bio- CO2 NBio- CO2 Total CO2		0.0000		0.000
PM2.5 Total		0.0197	7.4200e- 003	0.0271
Exhaust PM2.5		0.0000 0.0383 0.0197 0.0000 0.0197	7.4200e- 7.4200e- 003 003	7.4200e- 003
Fugitive PM2.5		0.0197		0.0197
PM10 Total		0.0383	8.0600e- 003	0.0464
Exhaust PM10	s/yr	0.0000	8.0600e- 003	8.0600e- 003
Fugitive PM10	tons/yr	0.0383		0.0383
SO2			1.9000e- 004	0.0985 1.9000e- C
00			0.0985	5860.0
×ON			0.0159 0.1654 0.0985 1.9000e- 004	0.0159 0.1654
ROG			0.0159	0.0159
	Category	Fugitive Dust	Off-Road	Total

Page 9 of 32

Date: 10/22/2021 7:49 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Mitigated Construction Off-Site 3.2 Site Preparation - 2022

		<u> </u>			
CO2e		0.0000	0.5487	0.7892	1.3379
N20		0.0000	8.0000e- 005	2.0000e- 005	1.0000e- 004
CH4	/yr	0.0000	1.0000e- 005	2.0000e- 005	3.0000e- 005
Total CO2	MT/yr	0.000.0	0.5254	0.7822	1.3076
Bio- CO2 NBio- CO2 Total CO2		0.0000 0.0000 0.0000 0.0000 0.0000	0.5254	0.7822	1.3076
Bio- CO2			0.0000	0.000.0	0.000.0
PM2.5 Total		0.0000	7.0000e- 005	2.7000e- 004	3.4000e- 004
Exhaust PM2.5		0.0000	2.0000e- 005	0.0000	2.0000e- 005
Fugitive PM2.5		0.000.0	5.0000 005	э- 2.6000e- 004	3.1000e- 004
PM10 Total		0.000.0	2.1000e- 004	9.9000e- 2. 004	1.2000e- 003
Exhaust PM10	ons/yr	0.0000	2.0000e- 005	1.0000e- 005	3.0000e- 005
Fugitive PM10	tons	0.0000	1.9000e- 004	9.9000e- 004	1.1800e- 003
SO2		0.0000	1.0000e- 005	1.0000e- 005	2.0000e- 005
00		0.0000	4.5000e- 004	3.0700e- 003	1.5700e- 3.5200e- 003 003
×ON		0.0000 0.0000 0.0000 0.0000	5.0000e- 1.3300e- 4.5000e- 1.0000e- 1.9000e- 005 003 004 005 004	2.4000e- 004	1.5700e- 003
ROG		0.0000	5.0000e- 005	3.1000e- 004	3.6000e- 004
	Category	Hauling	Vendor	Worker	Total

Unmitigated Construction On-Site 3.3 Grading - 2022

CO2e		0.0000	26.2654	26.2654
N20		0.000.0	0.0000	0.000
CH4	/yr	0.000.0	8.4300e- 003	8.4300e- 003
Total CO2	MT/yr	0.0000	26.0548	26.0548
Bio- CO2 NBio- CO2 Total CO2		0.0000 0.0000 0.0000 0.0000 0.0000	0.0000 26.0548 26.0548 8.4300e- 003	0.0000 26.0548 26.0548 8.4300e-
Bio- CO2		0.0000	0.0000	0.000
PM2.5 Total			8.6600e- 8.6600e- 003 003	0.0429
Exhaust PM2.5		0.0000 0.0708 0.0343 0.0000 0.0343	8.6600e- 003	8.6600e- 003
Fugitive PM2.5		0.0343		0.0343
PM10 Total		0.0708	9.4100e- 003	0.0802
Exhaust PM10	s/yr	0.0000	9.4100e- 9.4100e- 003 003	9.4100e- 003
Fugitive PM10	tons/yr	0.0708		0.0708
SO2			3.0000e- 004	3.0000e- 004
00			0.1527 3.0000e- 004	0.1527
XON			0.2086	0.0195 0.2086 0.1527 3.0000e-
ROG			0.0195	0.0195
	Category	Fugitive Dust	Off-Road	Total

Page 10 of 32

Date: 10/22/2021 7:49 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Grading - 2022

Unmitigated Construction Off-Site

			·		
CO2e		0.0000	1.0974	1.3153	2.4127
N20		0.000.0	1.6000e- 004	. 4.0000e- 005	2.0000e- 004
CH4	MT/yr	0.000.0	1.0000e- 005	3.0000e- 4 005	4.0000e- 005
Total CO2	LM	0.0000 0.0000.0	1.0507	1.3037	2.3544
Bio- CO2 NBio- CO2 Total CO2		0.0000	1.0507	1.3037	2.3544
Bio- CO2		0.0000	0.000.0	0.0000	0.000
PM2.5 Total		0.0000	1.4000e- 004	4.5000e- 004	5.9000e- 004
Exhaust PM2.5		0.000.0	.0000e- 005	1.0000e- 005	5.0000e- 005
Fugitive PM2.5		0.0000 0.0000 0.0000	1000e 004	4.4000e- 004	5.5000e- 004
PM10 Total		0.000.0	4.2000e- 1. 004	1.6600e- 4. 003	2.0800e- 003
Exhaust PM10	tons/yr	0.0000	.0000e- 005	.0000e- 005	5.0000e- 005
Fugitive PM10	tons	0.000.0	3.8000e- 004	1.6500e- 003	2.0300e- 003
805		0.000.0	000	1.0000e- 005	6.0100e- 2.0000e- 003 005
00		0.000	9.0000	5.1100e- 1.0000e- 003 005	6.0100e- 003
NOx		0.0000	2.6600e- 003	4.1000e- 004	6.2000e- 004 003
ROG		0.0000	1.0000e- 2.6600e- 9 004 003	5.2000e- 004	6.2000e- 004
	Category	Hauling	:	Worker	Total

Mitigated Construction On-Site

	ROG	XON	00	802	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	Bio- CO2 NBio- CO2 Total CO2	Total CO2	CH4	N20	CO2e
Category					tons/yr	s/yr							MT/yr	'yr		
Fugitive Dust					0.0276	0.0000	0.0276	0.0134	0.0000	0.0000 0.0276 0.0134 0.0000 0.0134 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000	0.0000	0.0000	0.0000	0.000.0	0.000.0	0.0000
Off-Road	0.0195	0.208	0.1527	3 0.1527 3.0000e- 004		9.4100e- 9.4100e- 003 003	9.4100e- 003		8.6600e- 003	8.6600e- 0 003	0.0000	0.0000 26.0547	7 26.0547 8.4300e- (8.4300e- 003	0.000	26.2654
Total	0.0195	0.2086	0.1527	0.1527 3.0000e- 0.0276 004		9.4100e- 003	0.0370	0.013	4 8.6600e- 003	0.0220	0.000	26.0547	26.0547	8.4300e- 003	0.0000	26.2654

Page 11 of 32

Date: 10/22/2021 7:49 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Grading - 2022

Mitigated Construction Off-Site

itive Exhaust PM10 Fugitive Exhaust PM2.5 Bio- CO2 NBio- CO2 Total CO2 CH4 N2O CO2e Total PM2.5 PM2.5 Total	tons/yr	0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000	4.0000e- 4.2000e- 1.1000e- 4.0000e- 1.4000e- 0.0000 1.0507 1.0507 1.0000e- 0.05 0.000 0.0000 0.0000e- 0.0000e- 0.0000e- 0.0000 0.0000e- 0.	;00e- 1.0000e- 1.6600e- 4.4000e- 1.0000e- 4.5000e- 0.0000 1.3037 1.3037 3.0000e- 4.0000e- 1.3153 03 005 003 004 005 004	5.0000e- 2.0800e- 5.5000e- 5.0000e-
otal			1000e- 004	5000e- 0.0	5.9000e- 0.0 004
		0.0000	1.0000e- 005	0000e 005	5.0000e- 5.9 005
		0.0000	00 40 40	.4000e- 004	5.5000e- 004
PM10 Total		0.0000	.2000e- 004	1.6600e- 003	2.0800e- 003
Exhaust PM10	ıs/yr		4.0000 005	1.0000 005	5.0000e- 005
Fugitive PM10	ton	0.0000 0.0000 0.0000 0.0000	1.0000e- 2.6600e- 9.0000e- 1.0000e- 3.8000e- 004 005 004	1.6500e- 003	2.0300e- 003
805		0.0000	1.0000e- 005	1.0000e- 005	2.0000e- 005
00		0.0000	9.0000e- 004	5.1100e- 003	6.0100e- 003
X O N		0.0000	2.6600e- 003	4.1000e- 004	3.0700e- 003
ROG		0.0000	1.0000e- 004	5.2000e- 4.1 004	6.2000e- 004
	Category	Hauling		Worker	Total

3.4 Building Construction - 2022

Unmitigated Construction On-Site

CO2e		11.6557	11.6557
N20		0.0000	0.0000
CH4	Уr	2.7800e- 003	2.7800e- C
Total CO2	MT/yr	11.5863	11.5863
NBio- CO2 Total CO2		0.0000 11.5863 11.5863 2.7800e-	11.5863 11.5863
Bio- CO2		0.0000	0.000
PM2.5 Total		3.8100e-	3.8100e- 003
Exhaust PM2.5		3.8100e- i 3 003	3.8100e- 003
Fugitive PM2.5			
PM10 Total		4.0500e- 003	4.0500e- 003
Exhaust PM10	ns/yr	4.0500e- 003	4.0500e- 003
Fugitive PM10	tons		
S02		1.3000e- 004	1.3000e- 004
00		0.0818	0.0818
×ON		0.0781	0.0781
ROG		8.5300e- 0.0781 0.0818 1.3000e- 003 004	8.5300e- 003
	Category	Off-Road	Total

Page 12 of 32

Date: 10/22/2021 7:49 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2022 Unmitigated Construction Off-Site

CO2e		0.0000	3.0180	3.9021	6.9200
N20		0.000.0	4.3000e- 004	1.1000e- 004	5.4000e- 004
CH4	/yr	0.0000 0.0000	3.0000e- 4. 005	1.0000e- 004	1.3000e- 004
Total CO2	MT/yr	0.000.0	2.8894	3.8676	6.7570
Bio- CO2 NBio- CO2 Total CO2		0.0000 0.0000 0.0000	2.8894	3.8676	6.7570
Bio- CO2		0.0000	0.0000	0.000.0	0.0000
PM2.5 Total		0.0000	4.0000e- 004	1.3200e- 003	1.7200e- 003
Exhaust PM2.5		0.0000	0000e- 004	2.0000e- 005	1.2000e- 004
Fugitive PM2.5		0000.	.0000e 004	.3000e 003	1.6000e- 003
PM10 Total		0.000.0	.1400e- 003	4.9200e- 003	6.0600e- 003
Exhaust PM10	s/yr	0.0000	1.0000e- 004	- 2.0000e- 005	1.2000e- 004
Fugitive PM10	tons/yr		.0400e- .003	8900e 003	5.9300e- 003
SO2		0.0000	.0000e- 005	.0000e- 005	7.0000e- 005
00		0.0000	2.4700e- 003	0.0152	0.0176
XON		0.0000	7.3200e- 003	1.2100e- 003	8.5300e- 003
ROG		0.0000	2.6000e- 7.3200e- 2.4700e- 3 004 003 003	1.5600e- 003	1.8200e- 003
	Category	Hauling	:	Worker	Total

Mitigated Construction On-Site

Bio-CO2 NBio-CO2 Total CO2 CH4 N2O CO2e	ΜΤ/yr	0.0000 11.5863 11.5863 2.7800e- 0.0000 11.6556	0.0000 11.5863 11.5863 2.7800e- 0.0000 11.6556 0.0000
PM2.5 Bi		3.8100e- 3.8100e- 0 003 003	3.8100e- 003
Exhaust PM2.5		3.8100e- 003	3.8100e- 003
Fugitive PM2.5			
PM10 Total		4.0500e- 003	4.0500e- 003
Exhaust PM10	tons/yr	4.0500e- 003	4.0500e- 003
Fugitive PM10	tor		
SO2		1.3000e- 004	1.3000e- 004
00		0.0818	0.0818 1.3000e-
XON		0.0781	0.0781
ROG		8.5300e- 0.0781 0.0818 1.3000e- 0.03	8.5300e- 0.0781 003
	Category	Off-Road	Total

Page 13 of 32

Date: 10/22/2021 7:49 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2022

Mitigated Construction Off-Site

	ROG	×ON	00	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	Bio- CO2 NBio- CO2 Total CO2	Total CO2	CH4	N20	CO2e
Category					tons/yr	/yr							MT/yr	/yr		
Hauling	0.0000	0.0000 0.0000 0.0000 0.0000	0.000.0	0.0000	0.0000	0.0000	0.000.0	0.0000	0.0000 0.0000 0.0000		0.0000	0.0000 0.0000 0.0000 0.0000	0.000.0	0.0000	0.0000	0.0000
Vendor	2.6000e- 004	2.6000e- 7.3200e- 2.4700e- 3.0000e- 1.0400e- 004 003 005 005	2.4700e- 003	3.0000e- 005	1.0400e- 003	e- 1.0000e- 004	1.1400	3.0000 004	.0000e- 004		0.0000	7	2.8894	3.0000e- 4. 005	4.3000e- 004	3.0180
Worker	1.5600e- 1.2100e- 003 003	1.2100e- 003	0.0152	4.0000e- 4.8900e 005 003	4.8900e- 003	2.0000e- 4.	9200 003	.3000e- 003	2.0000e- 005	1.3200e- 003	0.0000	3.8676	3.8676	1.0000e- 004	1.1000e- 004	3.9021
Total	1.8200e- 8.	8.5300e- 003	0.0176	0.0176 7.0000e- 005	5.9300e- 003	1.2000e- 6.	0600e- 003	1.6000e- 1 003	1.2000e- 004	1.7200e- 003	0.000	6.7570	6.7570	1.3000e- 004	5.4000e- 004	6.9200

3.4 Building Construction - 2023 **Unmitigated Construction On-Site**

CO2e		256.5017	256.5017
N2O		0.0000 254.9852 254.9852 0.0607 0.0000 256.5017	0.0000
CH4	/yr	0.0607	0.0607
Bio- CO2 NBio- CO2 Total CO2	MT/yr	254.9852	0.0000 254.9852 254.9852 0.0607
NBio- CO2		254.9852	254.9852
Bio- CO2		0.0000	
PM2.5 Total		0.0724	0.0724
Exhaust PM2.5		0.0724 0.0724	0.0724
Fugitive PM2.5			
PM10 Total		0.0770	0.0770
Exhaust PM10	tons/yr	0.0770	0.0770
Fugitive PM10			
802		2.9600e- 003	2.9600e- 003
00		1.7868	1.7868 2.9600e-
NOX		1.5823	0.1730 1.5823
ROG		0.1730 1.5823 1.7868 2.9600e-	0.1730
	Category	Off-Road	Total

Dage 14 of 32

Date: 10/22/2021 7:49 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2023 Unmitigated Construction Off-Site

	ROG	×ON	00	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	Bio- CO2 NBio- CO2 Total CO2	Total CO2	CH4	N20	CO2e
Category					tons/yr	s/yr						-	MT/yr	'yr		
Hauling	0.0000	0.0000 0.0000 0.0000 0.0000	0.0000	0.0000	[0.0000 0.0000 0.0000 0.0000	0.000.0	0.000.0	0.0000		0.0000	0.0000 0.0000 0.0000 0.0000 0.0000	0.000.0	0.0000	0.0000	0.0000
Vendor	3.9300e- 003	3.9300e- 0.1245 0.0496 6.3000e- 0.0229 003 004	0.0496	6.3000e- 004	[1.0300e- 003	0.0240	6.6200e- 003	6.6200e- 9.9000e- 7 003 004	.6100e- 003	0.0000	61.0749	31.0749	6.2000e- 004	9.0300e- 003	63.7816
Worker	0.0318	0.0235	0.3073	0.3073 8.9000e- 0.1076 004	0.1076	5.1000e- 004	0.1081	0.0286	4.7000e- 004	0.0291	0.000.0	82.8559	82.8559	2.0400e- 003	2.1700e- 003	83.5544
Total	0.0357	0.1480	0.3569	0.3569 1.5200e- 003	0.1305	1.5400e- 003	0.1321	0.0352	1.4600e- 003	0.0367	0.0000	143.9308	143.9308	2.6600e- 003	0.0112	147.3360

Mitigated Construction On-Site

CO2e		256.5013	256.5013
N20		0.0000	0.0000
CH4	Уr	0.0607	0.0607
Total CO2	MT/yr	254.9849	254.9849
Bio- CO2 NBio- CO2 Total CO2		254.9849	0.0000 254.9849 254.9849
Bio- CO2		0.0000	
PM2.5 Total		0.0724 0.0724 0.0000 254.9849 254.9849 0.0607 0.0000 256.5013	0.0724
Exhaust PM2.5		0.0724	0.0724
Fugitive PM2.5			
PM10 Total		0.0770	0.0770
Exhaust PM10	s/yr	0.0770	0.0770
Fugitive PM10	tons/yr		
SO2		2.9600e- 003	1.7868 2.9600e- 003
00		1.7868	
×ON		1.5823	1.5823
ROG		0.1730 1.5823 1.7868 2.9600e-	0.1730
	Category	Off-Road	Total

Page 15 of 32

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

Date: 10/22/2021 7:49 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Building Construction - 2023 Mitigated Construction Off-Site

	ROG	XON	00	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	Bio- CO2 NBio- CO2 Total CO2	Total CO2	CH4	NZO	CO2e
Category					tons/yr	s/yr							MT/yr	ýr		
Hauling	0.0000	0.0000	0.0000	0.0000 0.0000 0.0000 0.0000		0.0000	0.0000	0.000.0	0000		0.0000	0.0000 0.0000 0.0000 0.0000 0.0000	0.000.0	0.000.0	0.0000	0.0000
Vendor	3.9300e- 003	0.1245	0.0496	3.9300e- 0.1245 0.0496 6.3000e- 0.0229 003 004	0.0229	1.0300e- 003	0.0240	6.6200e- 9.9 003	0000e-	7.6100e- 003	0.0000	61.0749	31.0749	6.2000e- 004	- 9.0300e- 6. 003	63.7816
Worker	0.0318	0.0235	0.3073	0.3073 8.9000e- 0.1076 004	0.1076	5.1000e- 004	0.1081	0.0286	4.7000e- 004	0.0291	0.0000	82.8559	82.8559	2.0400e- 003	2.1700e- 8 003	83.5544
Total	0.0357	0.1480	0.3569	1.5200e- 003	0.1305	1.5400e- 003	0.1321	0.0352	1.4600e- 003	0.0367	0.0000	143.9308	143.9308	2.6600e- 003	0.0112	147.3360

Unmitigated Construction On-Site 3.5 Paving - 2023

CO2e		20.1888	0.0000	20.1888
N20		0.000.0	0.0000	0.000
CH4	/yr	6.4800e- 003	0.000.0	20.0269 6.4800e- 003
Total CO2	MT/yr	20.0269	0.0000	20.0269
Bio- CO2 NBio- CO2 Total CO2		0.0000 20.0269 20.0269 6.4800e- 0.0000 20.1888 003	0.0000	20.0269
Bio- CO2			0000	0000
PM2.5 Total		4.6900e- 003	0.0000	4.6900e- 0.
Exhaust PM2.5		4.6900e- 4.6900e- 003 003	0.000.0	4.6900e- 003
Fugitive PM2.5				
PM10 Total		5.1000e- 003	0.000.0	5.1000e- 003
Exhaust PM10	tons/yr	5.1000e- 5.1000e- 003 003	0.000	5.1000e- 003
Fugitive PM10	ton			
SO2		2.3000e- 004		2.3000e- 004
00		0.1458		0.1458
XON		0.1019		0.0143 0.1019 0.1458 2.3000e-
ROG		0.0103 0.1019 0.1458 2.3000e-	3.9300e- 003	0.0143
	Category	Off-Road	Paving	Total

Page 16 of 32

Date: 10/22/2021 7:49 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Paving - 2023

Unmitigated Construction Off-Site

ROG	× ON	00	S02	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	Bio- CO2 NBio- CO2 Total CO2	Total CO2	CH4	N20	CO2e
				tons/yr	'yr							MT/yr	ئد		
0.0000 0.0000 0.0000 0.0000	0	0000	0.0000		0.0000	0.000.0	0.0000 0.0000 0.0000 0.0000	0.000.0	P	0.0000 0.0000 0.0000 0.0000	0.0000	0.000.0	0.000.0	0.0000	0.0000
0.0000 0.0000 0.0000 0.0000	٥	0000.	0.0000	0.0000	0.0000	0.0000	0000	0000	0000.0	0.0000	0.0000	0.0000	0.0000	0.0000	0.000
4.9000e- 3.6000e- 4.7100e- 1.0000e- 1.6500e- 004 004 003 005 003	4.	7100e- 003	1.0000e- 005	1.6500e- 003	e- 1.0000e- 005	1.6600e 003	000e- 004	000e- 305	4.5000e- 004	0.000.0	1.2695	1.2695	3.0000e- 3.0 005	3.0000e- 005	1.2802
6000e- 004		3.6000e- 4.7100e- 1.0000e- 004 003 005	1.0000e- 005	1.6500e- 003	1.0000e- 1.0	1.6600e- 003	4.4000e- 004	1.0000e- 4 005	4.5000e- 004	0.0000	1.2695	1.2695	3.0000e- 005	3.0000e- 005	1.2802

Mitigated Construction On-Site

CO2e		20.1888	0.0000	20.1888
N20		0.0000	0.0000	0.0000
CH4	/yr	6.4800e- 003	0.0000	6.4800e- 003
Total CO2	MT/yr	20.0268	0.0000	20.0268
Bio- CO2 NBio- CO2 Total CO2		0.0000 20.0268 20.0268 6.4800e-	0.000	20.0268
Bio- CO2		0.000.0	0.000.0	0.000.0
PM2.5 Total			0.0000	4.6900e- 003
Exhaust PM2.5		4.6900e- 003	0.000	4.6900e- 003
Fugitive PM2.5				
PM10 Total		5.1000e- 003	0.0000	5.1000e- 003
Exhaust PM10	tons/yr	5.1000e- 5.1000e- 003 003	0.0000	5.1000e- 003
Fugitive PM10				
805		2.3000e- 004		2.3000e- 004
00		0.1458		0.1458
×ON		0.1019	- 	0.0143 0.1019 0.1458
ROG		0.0103 0.1019 0.1458 2.3000e-	3.9300e- 003	0.0143
	Category	Off-Road	Paving	Total

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

Page 17 of 32

Date: 10/22/2021 7:49 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Mitigated Construction Off-Site 3.5 Paving - 2023

ROG	×ON	00	802	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	Bio- CO2 NBio- CO2 Total CO2	Total CO2	CH4	N20	CO2e
				tons/yr	/yr						-	MT/yr	۲,		
	0.0000 0.0000 0.0000 0.0000	0.000.0	0.0000		0.000.0	0.000.0	0.0000 0.0000 0.0000 0.0000	0.000.0	T-1-1-1-1	0.000.0	0.0000	0.0000 0.0000 0.0000 0.0000	0.000.0	0.000.0	0.0000
	0.0000 0.0000 0.0000 0.0000	0.000.0	0.0000	0.0000	0.0000	0.0000	0000	0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
ģ	4.9000e- 3.6000e- 4.7100e- 1.0000e- 1.6500e- 004 003 005 003	4.7100e- 003	1.0000e- 005	1.6500e- 003	e- 1.0000e- 005	1.6600e 003	000e- 004	000e- 305	4.5000e- 004	0.0000	1.2695	1.2695	3.0000e- 3.0 005	3.0000e- 005	1.2802
4.9000e- 004	3.6000e- 004	3.6000e- 4.7100e- 1.0000e- 004 003 005	1.0000e- 005	1.6500e- 003	1.0000e- 1.0	1.6600e- 003	4.4000e- 004	1.0000e- 4 005	4.5000e- 004	0.0000	1.2695	1.2695	3.0000e- 005	3.0000e- 005	1.2802

3.6 Architectural Coating - 2023 **Unmitigated Construction On-Site**

tops/vr	
	tonsyl
0.0000 0.0000 0.0000	0.0000 0.0000
7.1000e- 7.1000e- 7.1000e- 7.1000e-	7.1000e- 7.1000e-
7.1000e- 7.1000e- 7.1000e- 004	3.0000e- 7.1000e- 7.1000e- 0.05 0.04 0.04
0.0000 0.0000 7.1000e- 7.1000e-	0.0000 3.0000e- 005
	.0181 3.0000e- 005

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

Date: 10/22/2021 7:49 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Architectural Coating - 2023 Unmitigated Construction Off-Site

2e		00	8	162	162
CO2e		00:00	0.0000	1.5362	1.5362
N20		0.0000	0.0000	- 4.0000e- 005	4.0000e- 005
CH4	/yr	0.0000	0.0000	4.0000e- 4. 005	4.0000e- 005
Total CO2	MT/yr	0.000.0	0.0000	1.5234	1.5234
NBio- CO2		0.0000 0.0000 0.0000 0.0000 0.0000	0.0000	1.5234	1.5234
Bio- CO2 NBio- CO2 Total CO2		0.0000	0.0000	0.000.0	0.000.0
PM2.5 Total		0.0000	0.0000	5.3000e- 004	5.3000e- 004
Exhaust PM2.5		0.0000 0.0000 0.0000 0.0000	0000	0000e- 005	1.0000e- 005
Fugitive PM2.5		0.0000	0000	3000	5.3000e- 004
PM10 Total		0.0000	0.0000	1.9900e- 003	1.9900e- 003
Exhaust PM10	s/yr	0.0000	0.0000	1.0000e- 005	1.0000e- 005
Fugitive PM10	tons/yr	_	0.0000	1.9800e- 003	1.9800e- 003
S02		0.0000 0.0000 0.0000 0.0000	0.0000 0.0000 0.0000 0.0000	5.8000e- 4.3000e- 5.6500e- 2.0000e- 1.9800e- 004 003 005 003	5.6500e- 2.0000e- 003 005
00		0.0000	0.0000	5.6500e- 003	5.6500e- 003
×ON		0.0000	0.0000	4.3000e- 004	5.8000e- 004 004
ROG		0.0000	0.0000	5.8000e- 004	5.8000e- 004
	Category	Hauling	Vendor	Worker	Total

Mitigated Construction On-Site

	ROG	×ON	00	802	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Bio- CO2 NBio- CO2 Total CO2 CH4	CH4	N20	CO2e
Category					tons/yr	s/yr							MT/yr	'yr		
Archit. Coating 0.4332	0.4332					0.000 0.0000	0.000.0		0.0000	0.0000 0.0000 0.0000 0.0000 0.0000 0.0000 0.0000	0.0000	0.000.0	0.000.0	0.000.0	0.000.0	0.0000
Off-Road	1.9200e- 003	1.9200e- 0.0130 003	0.0181	3.0000e- 005		7.1000e- 004	7.1000e- 004		7.1000e- 7.1000e- 004 004	7.1000e- 004	0.0000	2.5533	2.5533	1.5000e- 0 004	0.0000	2.5571
Total	0.4351	0.0130	0.0181	3.0000e- 005		7.1000e- 004	7.1000e- 004		7.1000e- 004	7.1000e- 004	0.000	2.5533	2.5533	1.5000e- 0.	0.0000	2.5571

Page 19 of 32

Date: 10/22/2021 7:49 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Architectural Coating - 2023

Mitigated Construction Off-Site

0.0000 1.5362 0.0000 1.5362 CO2e 4.0000e-005 4.0000e-005 0.0000 0.000 N20 4.0000e-005 4.0000e-005 0.0000 0.0000 CH4 MT/yr Total CO2 0.000.0 0.0000 1.5234 1.5234 NBio-CO2 0.0000 0.0000 1.5234 1.5234 Bio-CO2 0.0000 0.000.0 0.0000 0.0000 5.3000e-004 5.3000e- 1.0000e- 5.3000e-004 005 004 0.0000 0.0000 PM2.5 Total 1.0000e-005 0.000.0 Exhaust PM2.5 0.0000 5.3000e-004 0.000.0 Fugitive PM2.5 0.0000 1.9800e- 1.0000e- 1.9900e-003 005 003 1.9900e-003 0.000.0 0.0000 PM10 Total 1.0000e-005 Exhaust PM10 0.0000 0.0000 tons/yr 1.9800e-003 0.0000 0.000.0 Fugitive PM10 2.0000e-005 4.3000e- 5.6500e- 2.0000e-004 003 005 0.000.0 0.0000 **SO2** 5.6500e-003 0.000.0 0.0000 8 4.3000e-004 0.0000 0.0000 Ň 5.8000e-004 5.8000e-004 0.0000 0.0000 ROG Hauling Vendor Category Worker Total

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

Increase Transit Accessibility

Improve Pedestrian Network

Page 20 of 32

Date: 10/22/2021 7:49 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

CO2e		568.7919	724.7376	
NZO		0.0286 568.7919	0.0000 713.4240 713.4240 0.0362 0.0349 724.7376	
CH4	'yr	0.0308	0.0362	
Total CO2	MT/yr	559.4894	713.4240	
Bio- CO2 NBio- CO2 Total CO2		0.0000 559.4894 559.4894 0.0308	713.4240	
Bio- CO2		0.0000	0.0000	
PM2.5 Total		0.1724	0.2214	
Exhaust PM2.5		4.8800e- 0.6331 0.1678 4.5700e- 0.1724 003 003	5.7600e- 003	
Fugitive PM2.5	tons/yr	0.1678	0.2156	
PM10 Total			0.6331	0.8132 0.2156
Exhaust PM10		4.8800e- 003	6.1400e- 003	
Fugitive PM10				
802		0.2729 0.4063 2.6072 5.9600e- 0.6282 003	0.3052 0.4934 3.1780 7.6000e- 0.8070 003	
00		2.6072	3.1780	
×ON		0.4063	0.4934	
ROG		0.2729	0.3052	
	Category	Mitigated	Unmitigated	

4.2 Trip Summary Information

	Ave	Average Daily Trip Rate	ate	Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
City Park	0.00	0.00	00:00		
Other Asphalt Surfaces	0.00	0.00	00:00		
Single Family Housing		639.18	572.85	2,133,806	1,661,006
Total	631.81	639.18	572.85	2,133,806	1,661,006

4.3 Trip Type Information

% е	Pass-by		0	က
Trip Purpose %	Diverted	28	0	1
	Primary	99	0	98
	H-W or C-W H-S or C-C H-O or C-NW H-W or C-W H-S or C-C H-O or C-NW	19.00	0.00	40.60
Trip %	H-S or C-C		0.00	19.20
	H-W or C-W	33.00	i	40.20
	H-O or C-NW	06.9	6.90	8.70
Miles	H-S or C-C		8.40	5.90
	H-W or C-W	16.60	16.60	14.70
	Land Use	City Park 16.60 8.40	Other Asphalt Surfaces	Single Family Housing

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	NBUS	MCY	SBUS	MH
City Park	0.537845	0.056225	0.173186		0.025906	0.007191	0.011447	0.018769	0.000611	60000000	0.023821	0.001097	0.005189
Other Asphalt Surfaces 0.537845 0.056225 0.173186 0.138	0.537845	0.056225	0.173186		0.025906	0.007191	0.011447	0.018769	0.000611	405 0.025906 0.007191 0.011447 0.018769 0.000611 0.000309 0.023821 0.001097 0.005189	0.023821	0.001097	0.005189

Page 21 of 32

Date: 10/22/2021 7:49 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

0.038405 0.025906 0.007191 0.011447 0.018769 0.000611 0.000309 0.023821 0.001097 0.005189	0.007	.138405 0.025906 0.007		0.537845 0.056225 0.173186 0.138405 0.025906 0.007
			-	

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

Exceed Title 24

Kilowatt Hours of Renewable Electricity Generated

CO2e		26.8294	95.1255	96.1339	101.7374
NZO			9.7000e- 004	500e- 303	1.8500e- 003
CH4	/yr	2.2500e- 003	7.9900e- 9. 003	1.8300e- 003	1.9400e- 1.8
Total CO2	MT/yr	26.6917	4.637	95.566	101.1364 101.1364
Bio- CO2 NBio- CO2 Total CO2		0.0000 26.6917 26.6917 2.2500e- 2.7000e-	94.6373 9	95.5660	101.1364
Bio- CO2		0.0000	0000	0000	0.0000
PM2.5 Total		0.000.0	0.000.0	6.6700e- 003	7.0600e- 003
Exhaust PM2.5		0.0000	0.0000	6.6700e- 6 003	7.0600e- 003
Fugitive PM2.5					
PM10 Total		0.0000	0.0000	6.6700e- 003	7.0600e- 003
Exhaust PM10	tons/yr	0.000.0	0.0000	6.6700e- 003	7.0600e- 003
Fugitive PM10	ton				
SO2				0.0351 5.3000e- 004	5.6000e- 004
00				0.0351	0.0372
NOx				0.0825	0.0873
ROG				9.6600e- 003	0.0102
	Category	Electricity Mitigated	:	NaturalGas Mitigated	NaturalGas Unmitigated

Date: 10/22/2021 7:49 AM Page 22 of 32 CalEEMod Version: CalEEMod.2020.4.0

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

		Γ		4	4		
CO2e		0.0000	0.0000	101.7374	101.7374		
NZO		0.0000	0.0000	1.8500e- 003	1.8500e- 003		
CH4	MT/yr	0.0000	0.0000	1.9400e- 003	1.9400e- 003		
Total CO2	MT	0.000.0	0.0000	101.1364	101.1364		
Bio- CO2 NBio- CO2 Total CO2		0.0000 0.0000 0.0000 0.0000	0.0000	101.1364 101.1364 1.9400e- 003	101.1364 101.1364		
Bio- CO2		0.0000	0.000.0	0.0000	0.0000		
PM2.5 Total		0.0000	0.0000	- 7.0600e- 003	3- 7.0600e- 003		
Exhaust PM2.5		0.0000	0.0000	7.0600e- 003	7.0600e- 7 003		
Fugitive PM2.5							
PM10 Total		0.000.0	0.000.0	7.0600e- 003	7.0600e- 003		
Exhaust PM10	tons/yr	0.0000	0.0000	7.0600e- 003	7.0600e- 003		
Fugitive PM10	ton						
805				0.0000	0.0000	5.6000e- 004	5.6000e- 004
00					0.0000	0.0000	0.0372
NOx		0.0000	0.000.0	0.0873	0.0873		
ROG		0.0000 0.0000 0.0000	0.0000	0.0102	0.0102		
NaturalGa s Use	kBTU/yr	0	0	1.89522e +006			
	Land Use	City Park	Other Asphalt Surfaces	Single Family Housing	Total		

Date: 10/22/2021 7:49 AM Page 23 of 32 CalEEMod Version: CalEEMod.2020.4.0

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Mitigated

CO2e		0.0000	0.000.0	96.1339	96.1339
N2O		0.0000	0.0000	1.7500e- 003	1.7500e- 9
CH4	yr	0.0000 0.0000 0.0000	0.0000	30 1.8300e- 003	1.8300e- 1.7 003
Total CO2	MT/yr	0.000.0	0.000.0	95.5660	95.5660
Bio- CO2 NBio- CO2 Total CO2		0.0000 0.0000	0.0000	95.5660	95.5660
Bio- CO2		0.000.0	0.0000	0.000.0	0.0000
PM2.5 Total		0.0000	0.0000	6.6700e- 003	6.6700e- 003
Exhaust PM2.5		0.0000	0.000.0	6.6700e- 003	6.6700e- 003
Fugitive PM2.5					
PM10 Total		0.000.0	0.000.0	6.6700e- 003	6.6700e- 003
Exhaust PM10	tons/yr	0.000.0	0.000.0	6.6700e- 6. 003	6.6700e- 003
Fugitive PM10	ton				
805		0.0000	0.0000	5.3000e- 004	5.3000e- 004
00		0.0000	0.0000	0.0351	0.0351
×ON		0.0000 0.0000 0.0000	0.000.0	0.0825	0.0825
ROG		0.0000	0000	9.6600e- 0. 003	9.6600e- 003
NaturalGa s Use	kBTU/yr	0	0	1.79084e +006	
	Land Use	City Park	Other Asphalt Surfaces	Single Family Housing	Total

Date: 10/22/2021 7:49 AM Page 24 of 32 CalEEMod Version: CalEEMod.2020.4.0

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.3 Energy by Land Use - Electricity

CO2e		0.0000	0.0000	95.1255	95.1255
N20	/yr	0.0000	0.0000	9.7000e- 004	9.7000e- 004
CH4	MT/yr	0.000.0	0.000.0	7.9900e- 003	7.9900e- 003
Electricity Total CO2 Use		0.0000	0.0000	94.6373	94.6373
Electricity Use	kWh/yr	0	0	533632	
	Land Use	City Park	Other Asphalt Surfaces	Single Family Housing	Total

Page 25 of 32

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

Date: 10/22/2021 7:49 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.3 Energy by Land Use - Electricity

Mitigated

CO2e		-0.0002 -22.7097	-22.7097	72.2488	26.8294
N20	MT/yr	-0.0002	-0.0002	7.4000e- 004	2.8000e- 004
CH4	M	-0.0019	-0.0019	6.0700e- 003	2.2500e- 003
Total CO2		-22.5931	-22.5931	71.8780	26.6917
Electricity Use	kWh/yr	-127396	-127396	405299	
	Land Use	City Park	Other Asphalt Surfaces	Single Family Housing	Total

6.0 Area Detail

6.1 Mitigation Measures Area

No Hearths Installed

Page 26 of 32 CalEEMod Version: CalEEMod.2020.4.0

Date: 10/22/2021 7:49 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

CO2e		1.1558	1.1558
		0	:
N20		0.000(0.000(
CH4	/yr	1.0800e- 003	1.0800e- 003
Total CO2	MT/yr	1.1287	1.1287
Bio- CO2 NBio- CO2 Total CO2		1.1287	1.1287 1.1287 1.0800e- 0.0000 003
Bio- CO2		0000	0000
PM2.5 Total		.8300e- 003	.8300e- 003
Exhaust PM2.5		3.8300e- 3.8300e- 003 003	3.8300e- 3 003
Fugitive PM2.5			
PM10 Total		3.8300e- 003	3.8300e- 003
Exhaust PM10	s/yr	3.8300e-	3.8300e- 3.8300e- 003 003
Fugitive PM10	tons/yr		
802		4.0000e- 005	4.0000e- 005
00		0.6907	0.6907
×ON		7.9600e- 003	0.5521 7.9600e- 0.6907 4.0000e- 003 005
ROG		0.5521 7.9600e- 0.6907 4.0000e- 003 005	0.5521
	Category	Mitigated	Unmitigated

6.2 Area by SubCategory

CO2e		0.0000	0.0000	0.0000	1.1558	1.1558
N20		0.0000 0.0000	0.0000	0.0000	0.0000	0.0000
CH4	yr	0.000.0	0.000.0	0.000.0	1.0800e- 003	1.0800e- 003
Total CO2	MT/yr	0.0000	0.0000	0.0000	1.1287	1.1287
Bio- CO2 NBio- CO2 Total CO2		0.0000	0.0000	0.0000	1.1287	1.1287
Bio- CO2		0.000.0	0.000.0	0.000.0	0.0000	0.0000
PM2.5 Total		0.000	0000.0	0000.0	3.8300e- 003	3.8300e- 003
Exhaust PM2.5		0.000.0	0.000.0	0.000.0	3.8300e- 003	3.8300e- 003
Fugitive PM2.5						
PM10 Total		0.0000	0.0000	0.0000	3.8300e- 003	3.8300e- 003
Exhaust PM10	s/yr	0.0000	0.0000	0.0000	3.8300e- 003	3.8300e- 003
Fugitive PM10	tons/yr					
802				0.0000	4.0000e- 005	4.0000e- 005
00				0.000.0	0.6907	0.6907
×ON				0.0000	7.9600e- 0.6907 4. 003	7.9600e- 003
ROG		0.0433	0.4880	0.0000	0.0208	0.5521
	SubCategory	Architectural Coating	Consumer Products	Hearth	Landscaping	Total

Page 27 of 32

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

Date: 10/22/2021 7:49 AM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

	ROG	× ON	00	S02	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	Bio- CO2 NBio- CO2 Total CO2	Total CO2	CH4	N20	CO2e
SubCategory					tons/yr	s/yr							MT/yr	'yr		
Architectural Coating	0.0433					0.0000	0.0000		0.000.0	0.000	0.0000	0.0000	0.0000 0.0000 0.0000	0.0000		0.0000
Consumer Products	0.4880	 	 	 	; 	0.0000	0.0000	 	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Hearth	0.0000	0.0000	0000	0.0000	; 	0.0000	0.0000	 	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Landscaping	0.0208	7.9600e- 0.6 003	3907	4.0000e- 005		3.8300e- 003	3.8300e- 003	 	3.8300e- 003	3.8300e- 003	0.0000	1.1287	1.1287	1.0800e- 003	0.0000	1.1558
Total	0.5521	7.9600e- 003	0.6907	4.0000e- 005		3.8300e- 003	3.8300e- 003		3.8300e- 003	3.8300e- 003	0.0000	1.1287	1.1287	1.0800e- 003	0.000	1.1558

7.0 Water Detail

7.1 Mitigation Measures Water

Install Low Flow Bathroom Faucet

Install Low Flow Kitchen Faucet

Install Low Flow Toilet

Install Low Flow Shower

Use Water Efficient Irrigation System

Page 28 of 32

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Date: 10/22/2021 7:49 AM

Total CO2 CH4 N2O CO2e	MT/yr		18.2024 0.1437 3.5300e- 22.8462
Total Ci	Category	o و	Unmitigated 18.202

7.2 Water by Land Use

22.8462	3.5300e- 003	0.1437	18.2024		Total
21.5247	3.5200e- 003	0.1436	16.8878	4.36532 / 2.75205	Single Family Housing
0.0000	0.000.0	0.0000	0.0000	0/0	Other Asphalt Surfaces
1.3214	1.0000e- 005	1.1000e- 004	1.3147	0 / 0.66723	Oity Park
	MT/yr	M		Mgal	Land Use
CO2e	N20	CH4	Indoor/Out Total CO2 door Use	Indoor/Out door Use	

22.8462	3.5300e- 003	0.1437	18.2024		Total
21.5247	3.5200e- 003	0.1436	16.8878	4.36532 / 2.75205	Single Family Housing
0.0000	0.0000	0.0000	0.0000	0/0	Other Asphalt Surfaces
1.3214	1.0000e- 005	1.1000e- 004	1.3147	0 / 0.66723	City Park
	MT/yr	M		Mgal	Land Use
CO2e	N2O	CH4	Indoor/Out Total CO2 door Use	Indoor/Out door Use	

Date: 10/22/2021 7:49 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

7.2 Water by Land Use

Mitigated

CO2e		1.2408	0.000.0	17.9774	19.2182
NZO	MT/yr	1.0000e- 005	0.000.0	2.8200e- 003	2.8300e- 003
CH4	MT	1.0000e- 004	0.0000	0.1149	0.1150
Indoor/Out Total CO2 door Use		1.2345	0.0000	14.2639	15.4984
Indoor/Out door Use	Mgal	0 / 0.626529	0/0	3.49226 / 2.58417	
	Land Use	City Park	Other Asphalt Surfaces	Single Family Housing	Total

8.0 Waste Detail

8.1 Mitigation Measures Waste

Institute Recycling and Composting Services

Page 30 of 32

Date: 10/22/2021 7:49 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Category/Year

2e		890	.6136
CO2e		19.8(39.6136
NZO	MT/yr	0	0.0000
CH4	MT	0.4725	0.9450
Total CO2		7.9948 0.4725	15.9896
			Unmitigated

8.2 Waste by Land Use

CO2e		0.0252	0.0000	39.5884	39.6136
N20	MT/yr	0.0000	0.0000	0.0000	0.0000
CH4	MT	6.0000e- 004	0.0000	0.9444	0.9450
Total CO2		0.0102	0.0000	15.9795	15.9896
Waste Disposed	tons	0.05	0	78.72	
	Land Use	City Park	Other Asphalt Surfaces	Single Family Housing	Total

Date: 10/22/2021 7:49 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

8.2 Waste by Land Use

Mitigated

CO2e		0.0126	0.0000	19.7942	19.8068
N20	MT/yr	0.0000	0.0000	0.0000	0.0000
CH4	MT	3.0000e- 004	0.0000	0.4722	0.4725
Total CO2		5.0700e- 003	0.000.0	7.9897	7.9948
Waste Disposed	tons	0.025	0	39.36	
	Land Use	City Park	Other Asphalt Surfaces	Single Family Housing	Total

9.0 Operational Offroad

Fuel Type
Load Factor
Horse Power
Days/Year
Hours/Day
Number
Equipment Type

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Fuel Type	
Load Factor	
Horse Power	
Hours/Year	
Hours/Day	
Number	
Equipment Type	

Boilers

Fuel Type
Boiler Rating
Heat Input/Year
Heat Input/Day
Number
Equipment Type

User Defined Equipment

Number	
Equipment Type	

Page 32 of 32 CalEEMod Version: CalEEMod.2020.4.0

Date: 10/22/2021 7:49 AM

TTM No. 38237 Discovery Residential - Riverside-South Coast County, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

11.0 Vegetation